

Schnittstelle XML
ARGE Stammdaten
Export DGH



Version 7.0

Stand: 10.01.2021

Grünebaumstr. 4
33098 Paderborn
Telefon +49 5251 87288-0
Fax +49 5251 87288-19
E-Mail: info@arge.de

Versionshistory

Version 1.0 vom 02.07.2015

Initiale Version erstellt

Version 1.1 vom 20.04.2016

Struktur	Version 1.0		Version 1.1	
element bBulkGood	used by:	ComplexType, Articles	used by:	entfällt
element cArticletype			facets:	neu: STG
element cCurrencyNet				entfällt
element cPriceunitNet				entfällt
element nPricebaseNet				entfällt
element nPriceNet				entfällt
element cQuantityUnit	used by:	ArticlesTypes, ArticleSets, PackageUnit Type	used by:	entfällt
element nMinOrder	type:	Long 15 Trennzeichen	type: facets:	Decimal_16_3 angepasst
element nQuantity	type:	Int 15 Trennzeichen	type: facets:	Decimal_16_3 angepasst
element sArticleNumberPrint	type:	String 15 Type	type:	String 35 Type
element slIntrastatnumber				entfällt
element sSupplier				entfällt
element ArticlesType/ArticleAccessories/bAccessoryUse			neu	neu
element ArticlesType/ArticleAccessories/nAmount			neu	neu
element ArticlesType/ArticleDocuments/cDocumentType			facets:	neu: LE, EL
element HeaderType/HeaderDocuments				entfällt
element HeaderType/HeaderDocuments/cDocumentType				entfällt
element HeaderType/HeaderDocuments/cPictureType				entfällt
simpleType Artikellinktype				entfällt
simpleType Decimal_15_4				entfällt
simpleType Doctype_CL_Document_Header				entfällt
simpleType Doctype_CL_Document_HP			facets:	neu: LE, EL
simpleType Doctype_CL_Picture_Header				entfällt

simpleType Informationscodes				entfällt
simpleType Int_15_Trennzeichen				entfällt
simpleType Long_15_Trennzeichen				entfällt
simpleType String_1000_Type				entfällt
simpleType String_100_Type				entfällt
simpleType String_9_Type				entfällt

Version 1.2 vom 07.02.2017

Struktur	Version 1.1		Version 1.2	
element sSupplierID	type:	Int 10 Trennzeichen	type:	Int 13 Trennzeichen
element bUBAListRelevant	-	-	used by:	ArticlesType
element bUBAListConform	-	-	used by:	ArticlesType
element sSerie	-	-	used by:	ArticlesType
element sModelNumber	-	-	used by:	ArticlesType
element sDescriptionShort	-	-	used by:	ArticlesType
element sDescriptionLong	-	-	used by:	ArticlesType
element sDescriptionMarketing	-	-	used by:	ArticlesType
element sUsageNode	-	-	used by:	ArticlesType
element sUrl	type	200	type	256
element cAttributesystem	-	-	used by:	ArticleAttribut
element sAttributeclass	-	-	used by:	ArticleAttribut
element sAttributedescription	-	-	used by:	ArticleAttribut
simpleType Erlaubte_Zeichen_Extended	-	-	neu	
simpleType String_80_Type	-	-	neu	
simpleType String_256_Type	-	-	neu	
simpleType String_256_Extended_Type	-	-	neu	
simpleType String_512_Extended_Type	-	-	neu	
simpleType String_10000_Extended_Type	-	-	neu	
simpleType Int_13_Trennzeichen	-	-	neu	
simpleType Doctype_CL_Document_Article	-	-	neu	facets: UP, WL
simpleType Doctype_CL_Document_HP	-	-	neu	facets: UP, WL

simpleType Verpackungsart	-	-	neu	facets: PLA, KAN, GEB
simpleType Attributesystem_CL	-	-	neu	facets: INDIV, ETIM 6, ETIM 7, ERP 1.15, ERP 2.0, ERP 2.3

Version 4.0 vom 19.04.2018

Struktur	Version 1.2		Version 4.0	
element slInventory	type:	String 35 Type		entfällt
element Checknumber	type:	String 35 Type		entfällt
element REACH_date	-	-	neu	ArticlesType
element REACH_Info	-	-	neu	ArticlesType
simpleType REACH_CL	-	-	neu	facets: true, false, no data
simpleType Rawmaterial_CL	-	-	neu	facets: MS
simpleType Countries	-	-	neu	facets: CE, EU, QU
simpleType Verpackungsart	-	-	entfällt	facets: KAN
simpleType Verpackungsart	-	-	neu	facets: CI, RG

Version 5.0 vom 10.07.2019

Struktur	Version 4.0		Version 5.0	
simple Type Attributesystem_CL	-	-	neu	facets: ZVSHK
simple Type Doctype_CL_Document_Article	-	-	neu	facets: VP, VM, VT, EP, BS, EX, AS, KS, CE, VD, SS
simple Type Doctype_CL_Document_HP	-	-	neu	facets: VP, VM, VT, EP, BS, EX, AS, KS, CE, VD, SS
element sAttributeclass	type:	String 35	type:	String 60 facets: angepasst
element sAttributename	type:	String 35	type:	String 60 facets: angepasst
element sAttributevalue	type:	String 35	type:	String 60 facets: angepasst
element sAttributevalue2	type:	String 35	type:	String 60 facets: angepasst
element sAttributeunit	type:	String 35	type:	String 60 facets: angepasst
element sAttributedescription	type:	String 35	type:	String 60 facets: angepasst
element sDescriptionShort	type:	minOccurs = 0	type:	minOccurs = 1 ref: angepasst
element bDeleted	-	-	neu used:	ArticlesType

Version 5.1 vom 17.07.2019

Struktur	Version 5.0		Version 5.1	
element bSystemRelevantPackaging	-	-	neu used:	HeaderType
element LUCID_RegistrationNumber	-	-	neu used:	HeaderType
Element sDisposalServiceAgent	-	-	neu used:	HeaderType
element WEEERelevant	-	-	neu used:	HeaderType
element WEEE_RegistrationNumber	-	-	neu used:	HeaderType

Version 5.2 vom 19.12.2019

Struktur	Version		Version 5.2	
	5.1			
element cDocumentType	-	-	neu	Facets: PL
element HistoricProductsType/HistoricProductDocs/cDocumentType	-	-	neu	Facets: PL
element cAttributesystem	-	-	neu	facets: Batteriekennzeichnung
simple Type Attributesystem_CL	-	-	neu	facets: Batteriekennzeichnung
simple Type Doctype_CL_Document_Article	-	-	neu	facets: PL
simple Type Doctype_CL_Document_HP	-	-	neu	facets: PL

Version 6.0 vom 15.04.2020

Struktur	Version 5.2		Version 6.0	
element name sDocDescription	type:	String 35	type:	String 40
element name sWEENumber	-	-	type:	String 20 minOccurs = 0
element name bHazardousGood	-	-	type:	boolean
element name sSubstanceName	-	-	type:	String 20 minOccurs = 0
element name sAdditionalInformation	-	-	type:	String 20 minOccurs = 0
element name bLithiumBatteries	-	-	type:	boolean
ArticleAttributeID field xpath cAttributesystem	-	-	neu	
ArticleAttributeID field xpath sAttributevalue	-	-	neu	
element bIncludesWEEERelevantArticles	used:	HeaderType	entfällt	
element sWEENumber	used:	HeaderType	entfällt	
element name ArticleAccessories element bAccessoryUse			entfällt	
common_type	-	-	neu	࢘-FF
element cPictureType	-	-	neu	facets: KB, BF
simpleType Doctype_CL_Picture	-	-	neu	facets: KB, BF
element cDocumentType		facets: 3B,VP,TI,AN	ent- fallen	-
element HistoricProductsType/HistoricProductDocs/ cDocumentType		facets: 3B,VP,TI,AN	ent- fallen	
simpleType Doctype_CL_Document_Article		facets: 3B,VP,TI,AN	ent- fallen	
simpleType Doctype_CL_Document_HP		facets: 3B,VP,TI,AN	ent- fallen	
element cPackageKind	-	-	neu	facets:HP
simpleType EEC_CL			entfällt	
element cAttributesystem			neu	Facets: ETIM 8, ERP, ERP 2.5, Gefahrstoff
simpleType Attributesystem_CL	-	-	neu	Facets: ETIM 8, ERP, ERP 2.5, Gefahrstoff

Version 7.0 vom 10.01.2021

Struktur	Version 6.0		Version 7.0	
element name bDangerGood			entfällt	
element name bHazardousGood			entfällt	
element name bLithiumBatteries			entfällt	
element name bUBAListConform			entfällt	
element name bUBAListRelevant			entfällt	
element name REACH_date			entfällt	
element name REACH_Info			entfällt	
element name sWEENumber			entfällt	
element name sUNNumber			entfällt	
element name sDangerClass			entfällt	
element name sCustomsTariffNumber			entfällt	
element name sSubstanceName			entfällt	
element name sAdditionalInformation			entfällt	
element ArticlesType/PriceLine			neu	
element PriceLine	-	-	neu	
simpleType String_14_Type	-	-	neu	-
simpleType TestString_Type	-	-	neu	
simpleType DocType_CL_Document_Groups		facets: AS, LS, KV	entfallen	
simpleType sTestString	-	-	neu	

element cAttributesystem			neu	facets: Regulations, Gebühren
Attributnamen in Attributsystem Verordnungen (Regulations) (siehe Codelisten)			neu	facets: UN-Nummer, Gefahrenklasse, Beförderungskategorie, Offizielle Benennung, Technische Benennung, Gefahrenzettel, Verpackungsgruppe, Anzahl der Versandstücke, Beschreibung der Versandstücke, Tunnelbeschränkungscode
Attributsystem Verordnungen (Regulations) (siehe Codelisten)			neu	facets: ERP, ERP 1.15, ERP 2.0, ERP 2.1, ERP 2.3, ERP 2.5, UBA-Positivliste, Gefahrgut, REACH, ECHA-DB, Entsorgung, Batteriekennzeichnung
cAttributesystem			entfallen	ETIM 6, ERP, ERP 1.15, ERP 2.0, ERP 2.3, ERP 2.5, Batteriekennzeichnung, Gefahrstoff
complexType ArticlesType		neu: PLA, GEB	neu	
complexType PackageUnitType		neu: PMS	neu	

Schema **dgh.xsd**schema location: [dgh.xsd](#)

Elements

[bCapableOfOrdering](#)
[bDeleted](#)
[bExportabel](#)
[bSubstitute](#)
[cArticletype](#)
[cAttributesystem](#)
[cAttributeunit](#)
[cCountryOfOrigin](#)
[cCurrency](#)
[cCurrencyPro](#)
[cCurrencyUVP](#)
[cDiscontinued](#)
[cDocumentType](#)
[cMaterial](#)
[cMinOrderUnit](#)
[cPackageKind](#)
[cPictureType](#)
[cPictureUse](#)
[cPriceunit](#)
[cPriceunitPro](#)
[cPriceunitUVP](#)
[cTaxCode](#)
[cUnit](#)
[cWeightbaseUnit](#)
[cWeightrateUnit](#)
[dConstructionFrom](#)
[dConstructionTo](#)
[dDiscontinuedStart](#)
[dValidityBegin](#)
[dValidityEnd](#)
[nAmount](#)
[nDeliveryTime](#)
[nDocOrder](#)
[nMeasure](#)
[nMeasureA](#)
[nMeasureB](#)
[nMeasureC](#)
[nMinOrder](#)
[nPackageAmount](#)
[nPrice](#)
[nPricebase](#)
[nPricebasePro](#)

Complex types

[ArticlesType](#)
[BonusgroupsType](#)
[DiscountgroupsType](#)
[HeaderType](#)
[HistoricProductsType](#)
[LongtextType](#)
[PackageUnitType](#)
[ProductgroupsType](#)
[SHK StammdatenType](#)
[SparepartlistsType](#)
[WaregroupsType](#)


Simple types

[Articletype](#)
[Artikelnummer](#)
[Attributesystem CL](#)
[Countries](#)
[Currency CL](#)
[DateFormat](#)
[Decimal 15 2](#)
[Decimal 16 3](#)
[Decimal 18 4](#)
[Discontinued CL](#)
[Doctype CL Document Article](#)
[Doctype CL Document Groups](#)
[Doctype CL Document HP](#)
[Doctype CL Picture](#)
[Doctype CL Picture Groups](#)
[Erlaubte Zeichen](#)
[Erlaubte Zeichen Extended](#)
[Int 10 Trennzeichen](#)
[Int 1 99 Type](#)
[Int 2 Trennzeichen](#)
[Int 3 Type](#)
[Int 8 Trennzeichen](#)
[Int 9 Trennzeichen](#)
[PictureUse](#)
[PriceOnDemand Type](#)
[Rawmaterial CL](#)
[String 0 40 Type](#)
[String 10000 Extended Type](#)
[String 10 Type](#)
[String 14 Type](#)
[String 15 Type](#)
[String 20 Type](#)
[String 256 Extended Type](#)
[String 256 Type](#)
[String 2 Type](#)
[String 35 Type](#)
[String 3 Type](#)
[String 40 Type](#)
[String 4 Type](#)
[String 512 Extended Type](#)
[String 5 Type](#)
[String 60 Extended Type](#)

<u>nPricebaseUVP</u>	<u>String 80 Type</u>
<u>nPricePro</u>	<u>String 8 Type</u>
<u>nPriceUVP</u>	<u>Supplier ID</u>
<u>nQuantity</u>	<u>TaxCode CL</u>
<u>nRow</u>	<u>Teststring Type</u>
<u>nShelfLife</u>	<u>Unit CL</u>
<u>nTextRow</u>	<u>Verpackungsart</u>
<u>nWeight</u>	
<u>nWeigthbase</u>	
<u>nWeigthrate</u>	
<u>PriceOnDemand</u>	
<u>sAccessory</u>	
<u>sAlternate</u>	
<u>sArticle</u>	
<u>sArticleNumberPrint</u>	
<u>sAssignedArticle</u>	
<u>sAttributeclass</u>	
<u>sAttributedescription</u>	
<u>sAttributename</u>	
<u>sAttributevalue</u>	
<u>sAttributevalue2</u>	
<u>sBonusgroup</u>	
<u>sCatalogDesc</u>	
<u>sCatalogID</u>	
<u>sConstructiontext</u>	
<u>sDescription</u>	
<u>sDescriptionLong</u>	
<u>sDescriptionMarketing</u>	
<u>sDescriptionShort</u>	
<u>sDimensiontext</u>	
<u>sDiscountgroup</u>	
<u>sDocDescription</u>	
<u>sDocument</u>	
<u>sEan</u>	
<u>sExplodedView</u>	
<u>sHistoricProduct</u>	
<u>SHK Stammdaten</u>	
<u>sList</u>	
<u>sLongtext</u>	
<u>sMessageName</u>	
<u>sModelNumber</u>	
<u>sPosition</u>	
<u>sPricegroup</u>	
<u>sProductgroup</u>	
<u>sSerie</u>	
<u>sShorttext1</u>	

[sShorttext2](#)
[sSparepart](#)
[sSparepartlist](#)
[sSuccessor_1](#)
[sSuccessor_2](#)
[sSuccessor_3](#)
[sSupplierID](#)
[sSupplierShortName](#)
[sSupplierSynonym](#)
[sTeststring](#)
[sText](#)
[sUrl](#)
[sUsageNode](#)
[sWaregroup](#)
[sWaregroupNumber](#)

element **bCapableOfOrdering**

diagram	
type	xs:boolean
source	<code><xs:element name="bCapableOfOrdering" type="xs:boolean"/></code>

element **bDeleted**

diagram	
type	xs:boolean
used by	complexType ArticlesType
source	<code><xs:element name="bDeleted" type="xs:boolean"/></code>

element **bExportabel**

diagram	
type	xs:boolean
used by	complexType ArticlesType
source	<code><xs:element name="bExportabel" type="xs:boolean"/></code>

diagram	
type	xs:boolean
used by	elements ArticlesType/ArticlePictures HistoricProductsType/HistoricProductPics
source	<code><xs:element name="bSubstitute" type="xs:boolean"/></code>

diagram																															
type	Articletype																														
used by	complexType ArticlesType																														
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] ; &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*</td></tr> <tr> <td>enumeration</td><td>STD</td></tr> <tr> <td>enumeration</td><td>ERA</td></tr> <tr> <td>enumeration</td><td>ERB</td></tr> <tr> <td>enumeration</td><td>ERC</td></tr> <tr> <td>enumeration</td><td>VA</td></tr> <tr> <td>enumeration</td><td>MA</td></tr> <tr> <td>enumeration</td><td>DLS</td></tr> <tr> <td>enumeration</td><td>PAK</td></tr> <tr> <td>enumeration</td><td>SON</td></tr> <tr> <td>enumeration</td><td>KAL</td></tr> <tr> <td>enumeration</td><td>STG</td></tr> <tr> <td>enumeration</td><td>PLA</td></tr> <tr> <td>enumeration</td><td>GEB</td></tr> </tbody> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] ; < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*	enumeration	STD	enumeration	ERA	enumeration	ERB	enumeration	ERC	enumeration	VA	enumeration	MA	enumeration	DLS	enumeration	PAK	enumeration	SON	enumeration	KAL	enumeration	STG	enumeration	PLA	enumeration	GEB
Kind	Value																														
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] ; < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*																														
enumeration	STD																														
enumeration	ERA																														
enumeration	ERB																														
enumeration	ERC																														
enumeration	VA																														
enumeration	MA																														
enumeration	DLS																														
enumeration	PAK																														
enumeration	SON																														
enumeration	KAL																														
enumeration	STG																														
enumeration	PLA																														
enumeration	GEB																														
source	<code><xs:element name="cArticletype" type="Articletype"/></code>																														

diagram																			
type	Attributesystem CL																		
used by	element ArticlesType/ArticleAttribute																		
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9] . &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*</td></tr> <tr> <td>enumeration</td><td>INDIV</td></tr> <tr> <td>enumeration</td><td>ETIM 6</td></tr> <tr> <td>enumeration</td><td>ETIM 7</td></tr> <tr> <td>enumeration</td><td>ETIM 8</td></tr> <tr> <td>enumeration</td><td>ZVSHK</td></tr> <tr> <td>enumeration</td><td>Gebühren</td></tr> <tr> <td>enumeration</td><td>Regulations</td></tr> </tbody> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] . < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*	enumeration	INDIV	enumeration	ETIM 6	enumeration	ETIM 7	enumeration	ETIM 8	enumeration	ZVSHK	enumeration	Gebühren	enumeration	Regulations
Kind	Value																		
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] . < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*																		
enumeration	INDIV																		
enumeration	ETIM 6																		
enumeration	ETIM 7																		
enumeration	ETIM 8																		
enumeration	ZVSHK																		
enumeration	Gebühren																		
enumeration	Regulations																		

enumeration	BZ
enumeration	BJ
enumeration	BM
enumeration	BT
enumeration	BO
enumeration	BQ
enumeration	BA
enumeration	BW
enumeration	BV
enumeration	BR
enumeration	VG
enumeration	IO
enumeration	BN
enumeration	BG
enumeration	BF
enumeration	BU
enumeration	BI
enumeration	EA
enumeration	CL
enumeration	CN
enumeration	CP
enumeration	CK
enumeration	CR
enumeration	CI
enumeration	CW
enumeration	DK
enumeration	DE
enumeration	DG
enumeration	DM
enumeration	DO
enumeration	DJ
enumeration	EC
enumeration	SV
enumeration	ER
enumeration	EE
enumeration	CE
enumeration	EU
enumeration	FK
enumeration	FO
enumeration	FJ
enumeration	FI
enumeration	FR
enumeration	FX
enumeration	GF
enumeration	PF
enumeration	TF
enumeration	GA
enumeration	GM
enumeration	GE
enumeration	GH
enumeration	GI
enumeration	GD
enumeration	GR
enumeration	GL
enumeration	GP
enumeration	GU
enumeration	GT
enumeration	GG
enumeration	GN
enumeration	GW

enumeration	GY
enumeration	HT
enumeration	HM
enumeration	HN
enumeration	HK
enumeration	IN
enumeration	ID
enumeration	IM
enumeration	IQ
enumeration	IR
enumeration	IE
enumeration	IS
enumeration	IL
enumeration	IT
enumeration	JM
enumeration	JP
enumeration	YE
enumeration	JE
enumeration	JO
enumeration	YU
enumeration	KY
enumeration	KH
enumeration	CM
enumeration	CA
enumeration	IC
enumeration	CV
enumeration	KZ
enumeration	QA
enumeration	KE
enumeration	KG
enumeration	KI
enumeration	CC
enumeration	CO
enumeration	KM
enumeration	CD
enumeration	CG
enumeration	KP
enumeration	KR
enumeration	HR
enumeration	CU
enumeration	KW
enumeration	LA
enumeration	LS
enumeration	LV
enumeration	LB
enumeration	LR
enumeration	LY
enumeration	LI
enumeration	LT
enumeration	LU
enumeration	MO
enumeration	MG
enumeration	MW
enumeration	MY
enumeration	MV
enumeration	ML
enumeration	MT
enumeration	MA
enumeration	MH
enumeration	MQ

enumeration	MR
enumeration	MU
enumeration	YT
enumeration	MK
enumeration	MX
enumeration	FM
enumeration	MD
enumeration	MC
enumeration	MN
enumeration	ME
enumeration	MS
enumeration	MZ
enumeration	MM
enumeration	NA
enumeration	NR
enumeration	NP
enumeration	NC
enumeration	NZ
enumeration	NT
enumeration	NI
enumeration	NL
enumeration	AN
enumeration	NE
enumeration	NG
enumeration	NU
enumeration	MP
enumeration	NF
enumeration	NO
enumeration	OM
enumeration	AT
enumeration	TL
enumeration	PK
enumeration	PS
enumeration	PW
enumeration	PA
enumeration	PG
enumeration	PY
enumeration	PE
enumeration	PH
enumeration	PN
enumeration	PL
enumeration	PT
enumeration	PR
enumeration	RE
enumeration	RW
enumeration	RO
enumeration	RU
enumeration	SB
enumeration	BL
enumeration	MF
enumeration	ZM
enumeration	WS
enumeration	SM
enumeration	ST
enumeration	SA
enumeration	SE
enumeration	CH
enumeration	SN
enumeration	RS
enumeration	CS

enumeration	SC
enumeration	SL
enumeration	ZW
enumeration	SG
enumeration	SX
enumeration	SK
enumeration	SI
enumeration	SO
enumeration	ES
enumeration	LK
enumeration	SH
enumeration	KN
enumeration	LC
enumeration	PM
enumeration	VC
enumeration	ZA
enumeration	SD
enumeration	GS
enumeration	SS
enumeration	SR
enumeration	SJ
enumeration	SZ
enumeration	SY
enumeration	TJ
enumeration	TW
enumeration	TZ
enumeration	TH
enumeration	TG
enumeration	TK
enumeration	TO
enumeration	TT
enumeration	TA
enumeration	TD
enumeration	CZ
enumeration	CS
enumeration	TN
enumeration	TR
enumeration	TM
enumeration	TC
enumeration	TV
enumeration	SU
enumeration	UG
enumeration	UA
enumeration	HU
enumeration	UM
enumeration	UY
enumeration	UZ
enumeration	VU
enumeration	VA
enumeration	VE
enumeration	AE
enumeration	US
enumeration	GB
enumeration	VN
enumeration	WF
enumeration	CX
enumeration	EH
enumeration	ZR
enumeration	CF
enumeration	CY

element cCurrency

element **cCurrencyPro**

element **cCurrencyUVP**

element **cDiscontinued**

Seite 19 von 116


element **cDocumentType**

Seite 20 von 116

element **cMaterial**

diagram		
type	Rawmaterial_CL	
used by	element	ArticlesType/ArticleRawmaterials
facets	Kind	Value
	pattern	([0-9] ! " # $ % & ' () 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*
	enumeration	AL
	enumeration	PB
	enumeration	CR
	enumeration	AU
	enumeration	CD
	enumeration	CU
	enumeration	MG
	enumeration	MS
	enumeration	NI
	enumeration	PL
	enumeration	AG
	enumeration	W
	enumeration	ZN
	enumeration	SN
source	<xs:element name="cMaterial" type="Rawmaterial_CL"/>	

element **cMinOrderUnit**

diagram		
type	Unit_CL	
used by	complexType	ArticlesType
facets	Kind	Value
	enumeration	DZN
	enumeration	GRM
	enumeration	HLT
	enumeration	KGM
	enumeration	KTM
	enumeration	MTQ
	enumeration	CMQ
	enumeration	LTR
	enumeration	MTR
	enumeration	MMT
	enumeration	PR
	enumeration	MTK
	enumeration	CMK
	enumeration	SET
	enumeration	PCE
	enumeration	TNE
	enumeration	CMT
source	<xs:element name="cMinOrderUnit" type="Unit_CL"/>	

element **cPackageKind**


diagram		
type	Verpackungsart	
used by	complexType	PackageUnitType
facets	Kind	Value
	pattern	(\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\(\ *\ + ,\ &\x2D;\ \/ 0-9];&\x3C; = > \? &\x40;[A-Z]\^_ [a-z] ü Û ä Ä ö Ö § ß)*
	enumeration	BB
	enumeration	BG
	enumeration	BH
	enumeration	BK
	enumeration	CF
	enumeration	CG
	enumeration	CH
	enumeration	CI
	enumeration	CT
	enumeration	PA
	enumeration	PC
	enumeration	PG
	enumeration	PK
	enumeration	PN
	enumeration	PU
	enumeration	RG
	enumeration	SC
	enumeration	HP
	enumeration	TU
	enumeration	BTL
	enumeration	BX
	enumeration	CO
	enumeration	DY
	enumeration	STG
	enumeration	TRO
	enumeration	PLA
	enumeration	KAN
	enumeration	GEB
	enumeration	PMS
source	<xs:element name="cPackageKind" type="Verpackungsart"/>	

element **cPictureType**


diagram		
type	Doctype CL Picture	
used by	elements	ArticlesType/ArticlePictures HistoricProductsType/HistoricProductPics
facets	Kind	Value
	enumeration	B_
	enumeration	S_
	enumeration	U_
	enumeration	V_
	enumeration	MI
	enumeration	DT
	enumeration	LO

	enumeration KB enumeration BF
source	<code><xs:element name="cPictureType" type="Doctype_CL_Picture"/></code>


element **cPictureUse**

diagram									
type	PictureUse								
used by	elements ArticlesType/ArticlePictures HistoricProductsType/HistoricProductPics								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ä ö ö § ß)*</td></tr> <tr> <td>enumeration</td><td>Druck</td></tr> <tr> <td>enumeration</td><td>Web</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ö ö § ß)*	enumeration	Druck	enumeration	Web
Kind	Value								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ö ö § ß)*								
enumeration	Druck								
enumeration	Web								
source	<code><xs:element name="cPictureUse" type="PictureUse"/></code>								

element **cPriceunit**

diagram																																					
type	Unit_CL																																				
used by	element ArticlesType/PriceLine																																				
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr><td>enumeration</td><td>DZN</td></tr> <tr><td>enumeration</td><td>GRM</td></tr> <tr><td>enumeration</td><td>HLT</td></tr> <tr><td>enumeration</td><td>KGM</td></tr> <tr><td>enumeration</td><td>KTM</td></tr> <tr><td>enumeration</td><td>MTQ</td></tr> <tr><td>enumeration</td><td>CMQ</td></tr> <tr><td>enumeration</td><td>LTR</td></tr> <tr><td>enumeration</td><td>MTR</td></tr> <tr><td>enumeration</td><td>MMT</td></tr> <tr><td>enumeration</td><td>PR</td></tr> <tr><td>enumeration</td><td>MTK</td></tr> <tr><td>enumeration</td><td>CMK</td></tr> <tr><td>enumeration</td><td>SET</td></tr> <tr><td>enumeration</td><td>PCE</td></tr> <tr><td>enumeration</td><td>TNE</td></tr> <tr><td>enumeration</td><td>CMT</td></tr> </table>	Kind	Value	enumeration	DZN	enumeration	GRM	enumeration	HLT	enumeration	KGM	enumeration	KTM	enumeration	MTQ	enumeration	CMQ	enumeration	LTR	enumeration	MTR	enumeration	MMT	enumeration	PR	enumeration	MTK	enumeration	CMK	enumeration	SET	enumeration	PCE	enumeration	TNE	enumeration	CMT
Kind	Value																																				
enumeration	DZN																																				
enumeration	GRM																																				
enumeration	HLT																																				
enumeration	KGM																																				
enumeration	KTM																																				
enumeration	MTQ																																				
enumeration	CMQ																																				
enumeration	LTR																																				
enumeration	MTR																																				
enumeration	MMT																																				
enumeration	PR																																				
enumeration	MTK																																				
enumeration	CMK																																				
enumeration	SET																																				
enumeration	PCE																																				
enumeration	TNE																																				
enumeration	CMT																																				
source	<code><xs:element name="cPriceunit" type="Unit_CL"/></code>																																				

element **cPriceunitPro**

diagram	
---------	---

type	Unit_CL	
used by	complexType	ArticlesType
facets	Kind	Value
	enumeration	DZN
	enumeration	GRM
	enumeration	HLT
	enumeration	KGM
	enumeration	KTM
	enumeration	MTQ
	enumeration	CMQ
	enumeration	LTR
	enumeration	MTR
	enumeration	MMT
	enumeration	PR
	enumeration	MTK
	enumeration	CMK
	enumeration	SET
	enumeration	PCE
	enumeration	TNE
	enumeration	CMT
source	<xs:element name="cPriceunitPro" type="Unit_CL"/>	

element **cPriceunitUVP**


diagram		
type	Unit_CL	
used by	complexType	ArticlesType
facets	Kind	Value
	enumeration	DZN
	enumeration	GRM
	enumeration	HLT
	enumeration	KGM
	enumeration	KTM
	enumeration	MTQ
	enumeration	CMQ
	enumeration	LTR
	enumeration	MTR
	enumeration	MMT
	enumeration	PR
	enumeration	MTK
	enumeration	CMK
	enumeration	SET
	enumeration	PCE
	enumeration	TNE
	enumeration	CMT
source	<xs:element name="cPriceunitUVP" type="Unit_CL"/>	

diagram													
type	TaxCode_CL												
used by	complexType ArticlesType												
facets	<table border="0"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] : &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> <tr> <td>enumeration</td><td>0</td></tr> <tr> <td>enumeration</td><td>1</td></tr> <tr> <td>enumeration</td><td>7</td></tr> <tr> <td>enumeration</td><td>8</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] : < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*	enumeration	0	enumeration	1	enumeration	7	enumeration	8
Kind	Value												
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] : < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*												
enumeration	0												
enumeration	1												
enumeration	7												
enumeration	8												
source	<code><xs:element name="cTaxCode" type="TaxCode_CL"/></code>												

diagram																																					
type	<u>Unit_CL</u>																																				
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> </tr> </thead> <tbody> <tr><td>enumeration</td><td>DZN</td></tr> <tr><td>enumeration</td><td>GRM</td></tr> <tr><td>enumeration</td><td>HLT</td></tr> <tr><td>enumeration</td><td>KGM</td></tr> <tr><td>enumeration</td><td>KTM</td></tr> <tr><td>enumeration</td><td>MTQ</td></tr> <tr><td>enumeration</td><td>CMQ</td></tr> <tr><td>enumeration</td><td>LTR</td></tr> <tr><td>enumeration</td><td>MTR</td></tr> <tr><td>enumeration</td><td>MMT</td></tr> <tr><td>enumeration</td><td>PR</td></tr> <tr><td>enumeration</td><td>MTK</td></tr> <tr><td>enumeration</td><td>CMK</td></tr> <tr><td>enumeration</td><td>SET</td></tr> <tr><td>enumeration</td><td>PCE</td></tr> <tr><td>enumeration</td><td>TNE</td></tr> <tr><td>enumeration</td><td>CMT</td></tr> </tbody> </table>	Kind	Value	enumeration	DZN	enumeration	GRM	enumeration	HLT	enumeration	KGM	enumeration	KTM	enumeration	MTQ	enumeration	CMQ	enumeration	LTR	enumeration	MTR	enumeration	MMT	enumeration	PR	enumeration	MTK	enumeration	CMK	enumeration	SET	enumeration	PCE	enumeration	TNE	enumeration	CMT
Kind	Value																																				
enumeration	DZN																																				
enumeration	GRM																																				
enumeration	HLT																																				
enumeration	KGM																																				
enumeration	KTM																																				
enumeration	MTQ																																				
enumeration	CMQ																																				
enumeration	LTR																																				
enumeration	MTR																																				
enumeration	MMT																																				
enumeration	PR																																				
enumeration	MTK																																				
enumeration	CMK																																				
enumeration	SET																																				
enumeration	PCE																																				
enumeration	TNE																																				
enumeration	CMT																																				
source	<code><xs:element name="cUnit" type="Unit_CL"/></code>																																				


diagram									
type	Unit CL								
used by	element ArticlesType/ArticleRawmaterials								
facets	<table border="0"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>enumeration</td><td>DZN</td></tr> <tr> <td>enumeration</td><td>GRM</td></tr> <tr> <td>enumeration</td><td>HIT</td></tr> </table>	Kind	Value	enumeration	DZN	enumeration	GRM	enumeration	HIT
Kind	Value								
enumeration	DZN								
enumeration	GRM								
enumeration	HIT								

	enumeration	KGM
	enumeration	KTM
	enumeration	MTQ
	enumeration	CMQ
	enumeration	LTR
	enumeration	MTR
	enumeration	MMT
	enumeration	PR
	enumeration	MTK
	enumeration	CMK
	enumeration	SET
	enumeration	PCE
	enumeration	TNE
	enumeration	CMT
source	<xs:element name="cWeightbaseUnit" type="Unit_CL"/>	

element **cWeightrateUnit**


diagram		
type	Unit_CL	
used by	element	ArticlesType/ArticleRawmaterials
facets	Kind	Value
	enumeration	DZN
	enumeration	GRM
	enumeration	HLT
	enumeration	KGM
	enumeration	KTM
	enumeration	MTQ
	enumeration	CMQ
	enumeration	LTR
	enumeration	MTR
	enumeration	MMT
	enumeration	PR
	enumeration	MTK
	enumeration	CMK
	enumeration	SET
	enumeration	PCE
	enumeration	TNE
	enumeration	CMT
source	<xs:element name="cWeightrateUnit" type="Unit_CL"/>	

element **dConstructionFrom**


diagram		
type	DateFormat	
used by	element	SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct
	complexType	ArticlesType HistoricProductsType
facets	Kind	Value
	pattern	((([0][1-9])([12][0-9])(3[01]))((0[13578])(1[02]))(19 20)[0-9]{2}) ((([0][1-9])([12][0-9]30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9])([1][0-9]2[0-8])02((19) (20))[0-9]{2})) ((([0][1-9])([12][0-

	9))02(2000((19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))
source	<code><xs:element name="dConstructionFrom" type="DateFormat"/></code>


element **dConstructionTo**

diagram					
type	DateFormat				
used by	complexType ArticlesType HistoricProductsType				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))				
source	<code><xs:element name="dConstructionTo" type="DateFormat"/></code>				


element **dDiscontinuedStart**

diagram					
type	DateFormat				
used by	complexType ArticlesType				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))				
source	<code><xs:element name="dDiscontinuedStart" type="DateFormat"/></code>				

element **dValidityBegin**


diagram					
type	DateFormat				
used by	complexType ArticlesType HeaderType				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469])11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))				
source	<code><xs:element name="dValidityBegin" type="DateFormat"/></code>				

element **dValidityEnd**

diagram	
---------	---

type	DateFormat				
used by	complexTypes ArticlesType HeaderType				
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))				
source	<code><xs:element name="dValidityEnd" type="DateFormat"/></code>				


element **nAmount**

diagram									
type	Decimal 16 3								
used by	element ArticlesType/ArticleAccessories								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nAmount" type="Decimal_16_3"/></code>								


element **nDeliveryTime**

diagram							
type	Int 8 Trennzeichen						
used by	complexType ArticlesType						
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99999999
Kind	Value						
minInclusive	1						
maxInclusive	99999999						
source	<code><xs:element name="nDeliveryTime" type="Int_8_Trennzeichen"/></code>						


element **nDocOrder**

diagram							
type	Int 10 Trennzeichen						
used by	elements ArticlesType/ArticleDocuments ArticlesType/ArticlePictures HistoricProductsType/HistoricProductDocs HistoricProductsType/HistoricProductPics						
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>9999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	9999999999
Kind	Value						
minInclusive	1						
maxInclusive	9999999999						
source	<code><xs:element name="nDocOrder" type="Int_10_Trennzeichen"/></code>						


element **nMeasure**

diagram									
type	Decimal 16 3								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nMeasure" type="Decimal_16_3"/></code>								


element **nMeasureA**

diagram									
type	Decimal 16 3								
used by	complexTypes ArticlesType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nMeasureA" type="Decimal_16_3"/></code>								

element **nMeasureB**

diagram									
type	Decimal 16 3								
used by	complexTypes ArticlesType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nMeasureB" type="Decimal_16_3"/></code>								

element **nMeasureC**

diagram									
type	Decimal 16 3								
used by	complexTypes ArticlesType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								

source	<code><xs:element name="nMeasureC" type="Decimal_16_3"/></code>
--------	---

element **nMinOrder**

diagram									
type	Decimal 16 3								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nMinOrder" type="Decimal_16_3"/></code>								

element **nPackageAmount**

diagram							
type	Int 8 Trennzeichen						
used by	complexType ArticlesType						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99999999
Kind	Value						
minInclusive	1						
maxInclusive	99999999						
source	<code><xs:element name="nPackageAmount" type="Int_8_Trennzeichen"/></code>						

element **nPrice**


diagram									
type	Decimal 15 2								
used by	element ArticlesType/PriceLine								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<code><xs:element name="nPrice" type="Decimal_15_2"/></code>								

element **nPricebase**


diagram	
type	Int 9 Trennzeichen

used by	element ArticlesType/PriceLine						
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	999999999
Kind	Value						
minInclusive	1						
maxInclusive	999999999						
source	<code><xs:element name="nPricebase" type="Int_9_Trennzeichen"/></code>						

element **nPricebasePro**

diagram							
type	Int 9 Trennzeichen						
used by	complexType ArticlesType						
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	999999999
Kind	Value						
minInclusive	1						
maxInclusive	999999999						
source	<code><xs:element name="nPricebasePro" type="Int_9_Trennzeichen"/></code>						

element **nPricebaseUVP**

diagram							
type	Int 9 Trennzeichen						
used by	complexType ArticlesType						
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	999999999
Kind	Value						
minInclusive	1						
maxInclusive	999999999						
source	<code><xs:element name="nPricebaseUVP" type="Int_9_Trennzeichen"/></code>						


element **nPricePro**

diagram									
type	Decimal 15 2								
used by	complexType ArticlesType								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<code><xs:element name="nPricePro" type="Decimal_15_2"/></code>								


element **nPriceUVP**

diagram		
type	Decimal 15 2	
used by	complexType	ArticlesType
facets	Kind	Value
	minInclusive	0.0
	totalDigits	15
	fractionDigits	2
source	<xs:element name="nPriceUVP" type="Decimal_15_2"/>	

element **nQuantity**

diagram		
type	Decimal 16 3	
used by	element	ArticlesType/ArticleSets
	complexType	PackageUnitType
facets	Kind	Value
	minInclusive	0.001
	totalDigits	16
	fractionDigits	3
source	<xs:element name="nQuantity" type="Decimal_16_3"/>	

element **nRow**

diagram		
type	Int 3 Type	
used by	element	SparepartlistsType/Spareparts
facets	Kind	Value
	pattern	([0-9]{1,3})
source	<xs:element name="nRow" type="Int_3_Type"/>	


element **nShelfLife**

diagram		
type	Int 1 99 Type	
used by	complexType	ArticlesType
facets	Kind	Value
	minInclusive	1
	maxInclusive	99
source	<xs:element name="nShelfLife" type="Int_1_99_Type"/>	

element **nTextRow**

diagram							
type	Int 2 Trennzeichen						
used by	elements ArticlesType/ArticleTexts LongtextType/Longtexts						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99
Kind	Value						
minInclusive	1						
maxInclusive	99						
source	<code><xs:element name="nTextRow" type="Int_2_Trennzeichen"/></code>						

element **nWeight**

diagram									
type	Decimal 16 3								
used by	complexTypes ArticlesType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nWeight" type="Decimal_16_3"/></code>								

element **nWeigthbase**

diagram									
type	Decimal 18 4								
used by	element ArticlesType/ArticleRawmaterials								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0001</td></tr> <tr> <td>totalDigits</td><td>18</td></tr> <tr> <td>fractionDigits</td><td>4</td></tr> </table>	Kind	Value	minInclusive	0.0001	totalDigits	18	fractionDigits	4
Kind	Value								
minInclusive	0.0001								
totalDigits	18								
fractionDigits	4								
source	<code><xs:element name="nWeigthbase" type="Decimal_18_4"/></code>								

element **nWeigthrate**

diagram	
type	Decimal 18 4
used by	element ArticlesType/ArticleRawmaterials

element **PriceOnDemand**

element sAccessory

element **sAlternate**

Seite 34 von 116

diagram									
type	Artikelnummer								
used by	complexType ArticlesType								
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>maxLength</td> <td>15</td> </tr> <tr> <td>pattern</td> <td>([a-zA-Z0-9]{1,15})</td> </tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	15	pattern	([a-zA-Z0-9]{1,15})
Kind	Value								
minLength	1								
maxLength	15								
pattern	([a-zA-Z0-9]{1,15})								
source	<code><xs:element name="sArticle" type="Artikelnummer"/></code>								

diagram									
type	String 35 Type								
used by	complexType ArticlesType								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>([a-zA-Z0-9_#x21;#x22;#x23;#x24;%#x26;#x27;\(\ *\ + , &#x2D;\ \. /[0-9]] &#x3C; = > ? &#x40; [A-Z]]\^ _ '[a-z]ü ü ä Ä ö Ö ß b)*</td></tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	35	pattern	([a-zA-Z0-9_#x21;#x22;#x23;#x24;%#x26;#x27;\(\ *\ + , -\ \. /[0-9]] < = > ? @ [A-Z]]\^ _ '[a-z]ü ü ä Ä ö Ö ß b)*
Kind	Value								
minLength	1								
maxLength	35								
pattern	([a-zA-Z0-9_#x21;#x22;#x23;#x24;%#x26;#x27;\(\ *\ + , -\ \. /[0-9]] < = > ? @ [A-Z]]\^ _ '[a-z]ü ü ä Ä ö Ö ß b)*								
source	<code><xs:element name="sArticleNumberPrint" type="String_35_Type"/></code>								

diagram									
type	String 15 Type								
used by	element ArticlesType/ArticleSets								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>([a-zA-Z0-9_#%&@~\ \\ ' * \. , &#x2D; \\. /[0-9]] &#x3C; = > &#x40; [A-Z]]\^ _ '[a-z]] ú Û ä ö Ö ß)*</td></tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	15	pattern	([a-zA-Z0-9_#%&@~\ \\ ' * \. , - \\. /[0-9]] < = > @ [A-Z]]\^ _ '[a-z]] ú Û ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	15								
pattern	([a-zA-Z0-9_#%&@~\ \\ ' * \. , - \\. /[0-9]] < = > @ [A-Z]]\^ _ '[a-z]] ú Û ä ö Ö ß)*								
source	<code><xs:element name="sAssignedArticle" type="String_15_Type"/></code>								


diagram	
type	String 60 Extended Type
used by	element ArticlesType/ArticleAttribute

facets	Kind	Value
	minLength	1
	maxLength	60
	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-𣀊}[∀-⋿])*
source	<xs:element name="sAttributeclass" type="String_60_Extended_Type"/>	

element **sAttributedescription**

diagram		
type	String_60_Extended_Type	
used by	element	ArticlesType/ArticleAttribute
facets	Kind	Value
	minLength	1
	maxLength	60
	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-𣀊}[∀-⋿])*
source	<xs:element name="sAttributedescription" type="String_60_Extended_Type"/>	

element **sAttributename**

diagram		
type	String_60_Extended_Type	
used by	element	ArticlesType/ArticleAttribute
facets	Kind	Value
	minLength	1
	maxLength	60
	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-𣀊}[∀-⋿])*
source	<xs:element name="sAttributename" type="String_60_Extended_Type"/>	

element **sAttributevalue**

diagram		
type	String_256_Extended_Type	
used by	element	ArticlesType/ArticleAttribute
facets	Kind	Value
	minLength	1
	maxLength	256
	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-𣀊}[∀-⋿])*

element **sAttributevalue2**

element **sBonusgroup**

element **sCatalogDesc**

Seite 37 von 116

diagram	
type	String_35_Type
used by	complexType HeaderType
facets	Kind minLength 1 maxLength 35 pattern (!"#$%&'\(\\ \"*\ \\\+ -\\. [0-9]) < = > \?@ [A-Z]\^_\`\'[a-z]úÛüäÄöÖšß)*
source	<xselement name="sCatalogID" type="String_35_Type"/>


diagram									
type	String 35 Type								
used by	complexTypees ArticlesType HistoricProductsType								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü û ä Ä ö Ö ß)*</td></tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	35	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ '[a-z] ü û ä Ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	35								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ '[a-z] ü û ä Ä ö Ö ß)*								
source	<code><xs:element name="sConstructiontext" type="String_35_Type"/></code>								

diagram	
type	String 40 Type
used by	element ArticlesType/PriceLine complexTypes BonusgroupsType DiscountgroupsType ProductgroupsType WaregroupsType
facets	Kind Value minLength 1 maxLength 40 pattern <code>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú ü Ä ö Ö ß)*</code>
source	<code><xs:element name="sDescription" type="String_40_Type"/></code>

diagram	
type	String 10000 Extended Type

used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10000</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10000	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	10000								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][∀-⋿])*								
source	<code><xs:element name="sDescriptionLong" type="String_10000_Extended_Type"/></code>								


element **sDescriptionMarketing**

diagram									
type	String_10000_Extended_Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10000</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10000	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	10000								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][∀-⋿])*								
source	<code><xs:element name="sDescriptionMarketing" type="String_10000_Extended_Type"/></code>								

element **sDescriptionShort**


diagram									
type	String_256_Extended_Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	256	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	256								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][∀-⋿])*								
source	<code><xs:element name="sDescriptionShort" type="String_256_Extended_Type"/></code>								

element **sDimensiontext**

diagram							
type	String_0_40_Type						
used by	element ArticlesType/ArticleTexts						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>40</td></tr> </table>	Kind	Value	minLength	0	maxLength	40
Kind	Value						
minLength	0						
maxLength	40						

	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sDimensiontext" type="String_0_40_Type"/>	


element **sDiscountgroup**

diagram		
type	String_4_Type	
used by	complexTypes	ArticlesType DiscountgroupsType
facets	Kind	Value
	minLength	1
	maxLength	4
	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sDiscountgroup" type="String_4_Type"/>	


element **sDocDescription**

diagram		
type	String_40_Type	
used by	elements	ArticlesType/ArticleDocuments ArticlesType/ArticlePictures HistoricProductsType/HistoricProductDocs HistoricProductsType/HistoricProductPics
facets	Kind	Value
	minLength	1
	maxLength	40
	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sDocDescription" type="String_40_Type"/>	

element **sDocument**

diagram		
type	String_35_Type	
used by	elements	ArticlesType/ArticleDocuments ArticlesType/ArticlePictures HistoricProductsType/HistoricProductDocs HistoricProductsType/HistoricProductPics
facets	Kind	Value
	minLength	1
	maxLength	35
	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sDocument" type="String_35_Type"/>	

element **sEan**

diagram									
type	String_14_Type								
used by	complexTypees ArticlesType HistoricProductsType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>14</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	14	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*
Kind	Value								
minLength	1								
maxLength	14								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*								
source	<code><xs:element name="sEan" type="String_14_Type"/></code>								

element **sExplodedView**

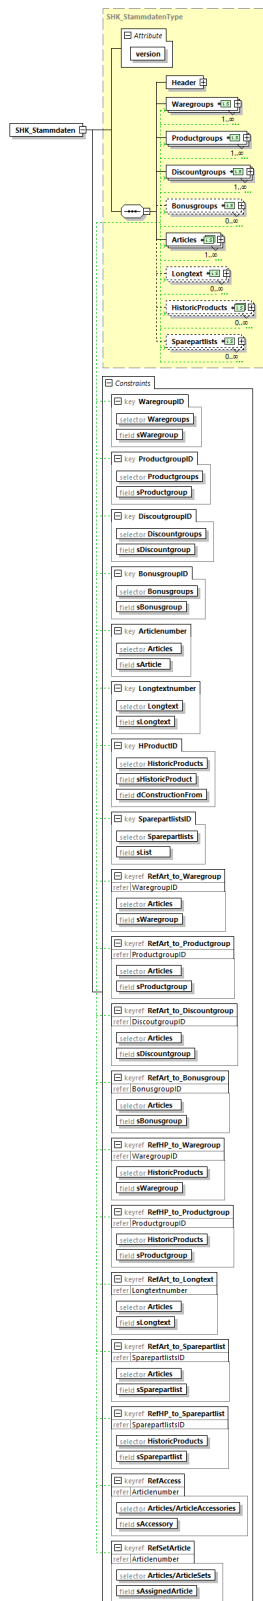
diagram									
type	String_35_Type								
used by	complexTypees ArticlesType HistoricProductsType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	35	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*
Kind	Value								
minLength	1								
maxLength	35								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*								
source	<code><xs:element name="sExplodedView" type="String_35_Type"/></code>								

element **sHistoricProduct**

diagram									
type	String_15_Type								
used by	<table> <tr> <td>element</td><td>SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct</td></tr> <tr> <td>complexType</td><td>HistoricProductsType</td></tr> </table>	element	SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct	complexType	HistoricProductsType				
element	SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct								
complexType	HistoricProductsType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	15	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*
Kind	Value								
minLength	1								
maxLength	15								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*								
source	<code><xs:element name="sHistoricProduct" type="String_15_Type"/></code>								

element **SHK_Stammdaten**

diagram



type	SHK StammdatenType				
children	Header Waregroups Productgroups Discountgroups Bonusgroups Articles Longtext HistoricProducts Sparepartlists				
attributes	Name version	Type xs:string	Use required	Default	Fixed 7.0
identity constraints	key	Name WaregroupID	Refer	Selector Waregroups	Field(s) sWaregroup
	key	ProductgroupID		Productgroups	sProductgroup
	key	DiscountgroupID		Discountgroups	sDiscountgroup
	key	BonusgroupID		Bonusgroups	sBonusgroup
	key	Articlenumber		Articles	sArticle
	key	Longtextnumber		Longtext	sLongtext
	key	HProductID		HistoricProducts	sHistoricProduct dConstructionFrom sList
	key	SparepartlistsID		Sparepartlists	sList
	keyref	RefArt_to_Waregroup	WaregroupID	Articles	sWaregroup
	keyref	RefArt_to_Productgroup	ProductgroupID	Articles	sProductgroup
	keyref	RefArt_to_Discountgroup	DiscountgroupID	Articles	sDiscountgroup
	keyref	RefArt_to_Bonusgroup	BonusgroupID	Articles	sBonusgroup
	keyref	RefHP_to_Waregroup	WaregroupID	HistoricProducts	sWaregroup
	keyref	RefHP_to_Productgroup	ProductgroupID	HistoricProducts	sProductgroup
	keyref	RefArt_to_Longtext	Longtextnumber	Articles	sLongtext
	keyref	RefArt_to_Sparepartlist	SparepartlistsID	Articles	sSparepartlist
	keyref	RefHP_to_Sparepartlist	SparepartlistsID	HistoricProducts	sSparepartlist
	keyref	RefAccess	Articlenumber	Articles/ArticleAccessories	sAccessory
	keyref	RefSetArticle	Articlenumber	Articles/ArticleSets	sAssignedArticle
source	<pre> <xs:element name="SHK_Stammdaten" type="SHK_StammdatenType"> <xs:key name="WaregroupID"> <xs:selector xpath="Waregroups"/> <xs:field xpath="sWaregroup"/> </xs:key> <xs:key name="ProductgroupID"> <xs:selector xpath="Productgroups"/> <xs:field xpath="sProductgroup"/> </xs:key> <xs:key name="DiscountgroupID"> <xs:selector xpath="Discountgroups"/> <xs:field xpath="sDiscountgroup"/> </xs:key> <xs:key name="BonusgroupID"> <xs:selector xpath="Bonusgroups"/> <xs:field xpath="sBonusgroup"/> </xs:key> <xs:key name="Articlenumber"> <xs:selector xpath="Articles"/> <xs:field xpath="sArticle"/> </xs:key> <xs:key name="Longtextnumber"> <xs:selector xpath="Longtext"/> <xs:field xpath="sLongtext"/> </xs:key> <xs:key name="HProductID"> <xs:selector xpath="HistoricProducts"/> </pre>				

```

    <xs:field xpath="sHistoricProduct"/>
    <xs:field xpath="dConstructionFrom"/>
  </xs:key>
  <xs:key name="SparepartlistsID">
    <xs:selector xpath="Sparepartlists"/>
    <xs:field xpath="sList"/>
  </xs:key>
  <xs:keyref name="RefArt_to_Waregroup" refer="WaregroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sWaregroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Productgroup" refer="ProductgroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sProductgroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Discountgroup" refer="DiscountgroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sDiscountgroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Bonusgroup" refer="BonusgroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sBonusgroup"/>
  </xs:keyref>
  <xs:keyref name="RefHP_to_Waregroup" refer="WaregroupID">
    <xs:selector xpath="HistoricProducts"/>
    <xs:field xpath="sWaregroup"/>
  </xs:keyref>
  <xs:keyref name="RefHP_to_Productgroup" refer="ProductgroupID">
    <xs:selector xpath="HistoricProducts"/>
    <xs:field xpath="sProductgroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Longtext" refer="Longtextnumber">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sLongtext"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Sparepartlist" refer="SparepartlistsID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sSparepartlist"/>
  </xs:keyref>
  <xs:keyref name="RefHP_to_Sparepartlist" refer="SparepartlistsID">
    <xs:selector xpath="HistoricProducts"/>
    <xs:field xpath="sSparepartlist"/>
  </xs:keyref>
  <xs:keyref name="RefAccess" refer="Articlenumber">
    <xs:selector xpath="Articles/ArticleAccessories"/>
    <xs:field xpath="sAccessory"/>
  </xs:keyref>
  <xs:keyref name="RefSetArticle" refer="Articlenumber">
    <xs:selector xpath="Articles/ArticleSets"/>
    <xs:field xpath="sAssignedArticle"/>
  </xs:keyref>
</xs:element>

```

diagram	
type	String_35_Type
used by	complexType SparepartlistsType
facets	Kind Value minLength 1 maxLength 35 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\) * \\+ , &#x2D;\\.\\/ [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ "[a-z] ü ä ö Ö š ß)*
source	<xselement name="sList" type="String_35_Type"/>

diagram	
type	String_8_Type
used by	complexTypes ArticlesType LongtextType
facets	Kind Value minLength 1 maxLength 8 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\\ \"*\ \\+ . &#x2D;\\.\\/ [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ \"'[a-z]ú ü ä Ä ö Ö § ß)*
source	<xselement name="sLongtext" type="String_8_Type"/>

diagram	
type	String_35_Type
used by	complexType HeaderType
facets	Kind Value minLength 1 maxLength 35 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\) *\ \.+ _ &#x2D;\\.\/ [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ \"[a-z] ú ü ä Ä ö Ö ß)*
source	<xselement name="sMessageName" type="String_35_Type"/>

diagram	
type	String 15 Type
used by	complexType ArticlesType

element sPosition

element **sPricegroup**

element **sProductgroup**

Seite 46 von 116

diagram									
type	String 80 Type								
used by	complexType ArticlesType								
facets	<table border="1"> <tr> <td>Kind</td> <td>Value</td> </tr> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>maxLength</td> <td>80</td> </tr> <tr> <td>pattern</td> <td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö š ß)*</td> </tr> </table>	Kind	Value	minLength	1	maxLength	80	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö š ß)*
Kind	Value								
minLength	1								
maxLength	80								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö š ß)*								
source	<code><xs:element name="sSerie" type="String_80_Type"/></code>								

diagram									
type	String_40_Type								
used by	complexTypees ArticlesType HistoricProductsType								
facets	<table border="1"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. \\/ [-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	40	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. \\/ [-9] < = > \\? @ [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	40								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. \\/ [-9] < = > \\? @ [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö ß)*								
source	<code><xs:element name="sShorttext1" type="String_40_Type"/></code>								

diagram									
type	String 40 Type								
used by	complexTypees ArticlesType HistoricProductsType								
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>maxLength</td> <td>40</td> </tr> <tr> <td>pattern</td> <td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ú ä Ä ö Ö ß *)</td> </tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	40	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ú ä Ä ö Ö ß *)
Kind	Value								
minLength	1								
maxLength	40								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ú ä Ä ö Ö ß *)								
source	<code><xs:element name="sShorttext2" type="String_40_Type"/></code>								

diagram	
---------	---

element **sSparepartlist**


element **sSuccessor 1**

element **sSuccessor_2**

Seite 48 von 116

	9]];< = > \?@ [A-Z]\^_` [a-z]ü Û ä Ä ö Ö § ß)*
source	<code><xs:element name="sSuccessor_2" type="String_15_Type"/></code>


element **sSuccessor_3**

diagram									
type	String 15 Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]];&#x3C; = > \?&#x40; [A-Z]\^_` [a-z]ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	15	pattern	(! " # $ % & ' \\(\\ \\* \\+ , - \\. / [0-9]];< = > \?@ [A-Z]\^\_` [a-z]ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	15								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]];< = > \?@ [A-Z]\^_` [a-z]ü Û ä Ä ö Ö § ß)*								
source	<code><xs:element name="sSuccessor_3" type="String_15_Type"/></code>								


element **sSupplierID**

diagram									
type	Supplier ID								
used by	complexType HeaderType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>13</td></tr> <tr> <td>pattern</td><td>([0-9])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	13	pattern	([0-9])*
Kind	Value								
minLength	1								
maxLength	13								
pattern	([0-9])*								
source	<code><xs:element name="sSupplierID" type="Supplier_ID"/></code>								

element **sSupplierShortName**

diagram									
type	String 20 Type								
used by	complexType HeaderType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>20</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]];&#x3C; = > \?&#x40; [A-Z]\^_` [a-z]ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	20	pattern	(! " # $ % & ' \\(\\ \\* \\+ , - \\. / [0-9]];< = > \?@ [A-Z]\^\_` [a-z]ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	20								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]];< = > \?@ [A-Z]\^_` [a-z]ü Û ä Ä ö Ö § ß)*								
source	<code><xs:element name="sSupplierShortName" type="String_20_Type"/></code>								


element **sSupplierSynonym**

diagram									
type	String 2 Type								
used by	complexType HeaderType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>2</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x4A;\x4B;\x4C;\x4D;\x4E;\x4F;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x5A;\x5B;\x5C;\x5D;\x5E;\x5F;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x6A;\x6B;\x6C;\x6D;\x6E;\x6F;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x7A;\x7B;\x7C;\x7D;\x7E;\x7F;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x8A;\x8B;\x8C;\x8D;\x8E;\x8F;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	2	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x4A;\x4B;\x4C;\x4D;\x4E;\x4F;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x5A;\x5B;\x5C;\x5D;\x5E;\x5F;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x6A;\x6B;\x6C;\x6D;\x6E;\x6F;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x7A;\x7B;\x7C;\x7D;\x7E;\x7F;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x8A;\x8B;\x8C;\x8D;\x8E;\x8F;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*
Kind	Value								
minLength	1								
maxLength	2								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x4A;\x4B;\x4C;\x4D;\x4E;\x4F;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x5A;\x5B;\x5C;\x5D;\x5E;\x5F;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x6A;\x6B;\x6C;\x6D;\x6E;\x6F;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x7A;\x7B;\x7C;\x7D;\x7E;\x7F;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x8A;\x8B;\x8C;\x8D;\x8E;\x8F;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*								
source	<code><xs:element name="sSupplierSynonym" type="String_2_Type"/></code>								


element **sTeststring**

diagram					
type	Teststring Type				
used by	complexType HeaderType				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>enumeration</td><td>1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄÜß®€</td></tr> </table>	Kind	Value	enumeration	1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄÜß®€
Kind	Value				
enumeration	1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄÜß®€				
source	<code><xs:element name="sTeststring" type="Teststring_Type"/></code>				

element **sText**

diagram									
type	String 40 Type								
used by	elements SparepartlistsType/Spareparts/ArticleRow SparepartlistsType/Spareparts/TextRow								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x4A;\x4B;\x4C;\x4D;\x4E;\x4F;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x5A;\x5B;\x5C;\x5D;\x5E;\x5F;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x6A;\x6B;\x6C;\x6D;\x6E;\x6F;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x7A;\x7B;\x7C;\x7D;\x7E;\x7F;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x8A;\x8B;\x8C;\x8D;\x8E;\x8F;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	40	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x4A;\x4B;\x4C;\x4D;\x4E;\x4F;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x5A;\x5B;\x5C;\x5D;\x5E;\x5F;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x6A;\x6B;\x6C;\x6D;\x6E;\x6F;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x7A;\x7B;\x7C;\x7D;\x7E;\x7F;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x8A;\x8B;\x8C;\x8D;\x8E;\x8F;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*
Kind	Value								
minLength	1								
maxLength	40								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A;\x2B;\x2C;\x2D;\x2E;\x2F;\x30;\x31;\x32;\x33;\x34;\x35;\x36;\x37;\x38;\x39;\x40;\x41;\x42;\x43;\x44;\x45;\x46;\x47;\x48;\x49;\x4A;\x4B;\x4C;\x4D;\x4E;\x4F;\x50;\x51;\x52;\x53;\x54;\x55;\x56;\x57;\x58;\x59;\x5A;\x5B;\x5C;\x5D;\x5E;\x5F;\x60;\x61;\x62;\x63;\x64;\x65;\x66;\x67;\x68;\x69;\x6A;\x6B;\x6C;\x6D;\x6E;\x6F;\x70;\x71;\x72;\x73;\x74;\x75;\x76;\x77;\x78;\x79;\x7A;\x7B;\x7C;\x7D;\x7E;\x7F;\x80;\x81;\x82;\x83;\x84;\x85;\x86;\x87;\x88;\x89;\x8A;\x8B;\x8C;\x8D;\x8E;\x8F;\x90;\x91;\x92;\x93;\x94;\x95;\x96;\x97;\x98;\x99;\xA0;\xA1;\xA2;\xA3;\xA4;\xA5;\xA6;\xA7;\xA8;\xA9;\xAA;\xAB;\xAC;\xAD;\xAE;\xAF;\xB0;\xB1;\xB2;\xB3;\xB4;\xB5;\xB6;\xB7;\xB8;\xB9;\xBA;\xBB;\xBC;\xBD;\xBE;\xBF;\xC0;\xC1;\xC2;\xC3;\xC4;\xC5;\xC6;\xC7;\xC8;\xC9;\xCA;\xCB;\xCC;\xCD;\xCE;\xCF;\xD0;\xD1;\xD2;\xD3;\xD4;\xD5;\xD6;\xD7;\xD8;\xD9;\xDA;\xDB;\xDC;\xDD;\xDE;\xDF;\xE0;\xE1;\xE2;\xE3;\xE4;\xE5;\xE6;\xE7;\xE8;\xE9;\xEA;\xEB;\xEC;\xED;\xEE;\xEF;\xF0;\xF1;\xF2;\xF3;\xF4;\xF5;\xF6;\xF7;\xF8;\xF9;\xFA;\xFB;\xFC;\xFD;\xFE;\xFF])*								
source	<code><xs:element name="sText" type="String_40_Type"/></code>								

element **sUrl**


diagram							
type	String 256 Type						
used by	complexType ArticlesType						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> </table>	Kind	Value	minLength	1	maxLength	256
Kind	Value						
minLength	1						
maxLength	256						

	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ö ö \$ ß)*
source		<code><xs:element name="sUrl" type="String_256_Type"/></code>

element **sUsageNode**

diagram		
type	String_512_Extended_Type	
used by	complexType	ArticlesType
facets	Kind	Value
	minLength	1
	maxLength	512
	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*
source	<code><xs:element name="sUsageNode" type="String_512_Extended_Type"/></code>	

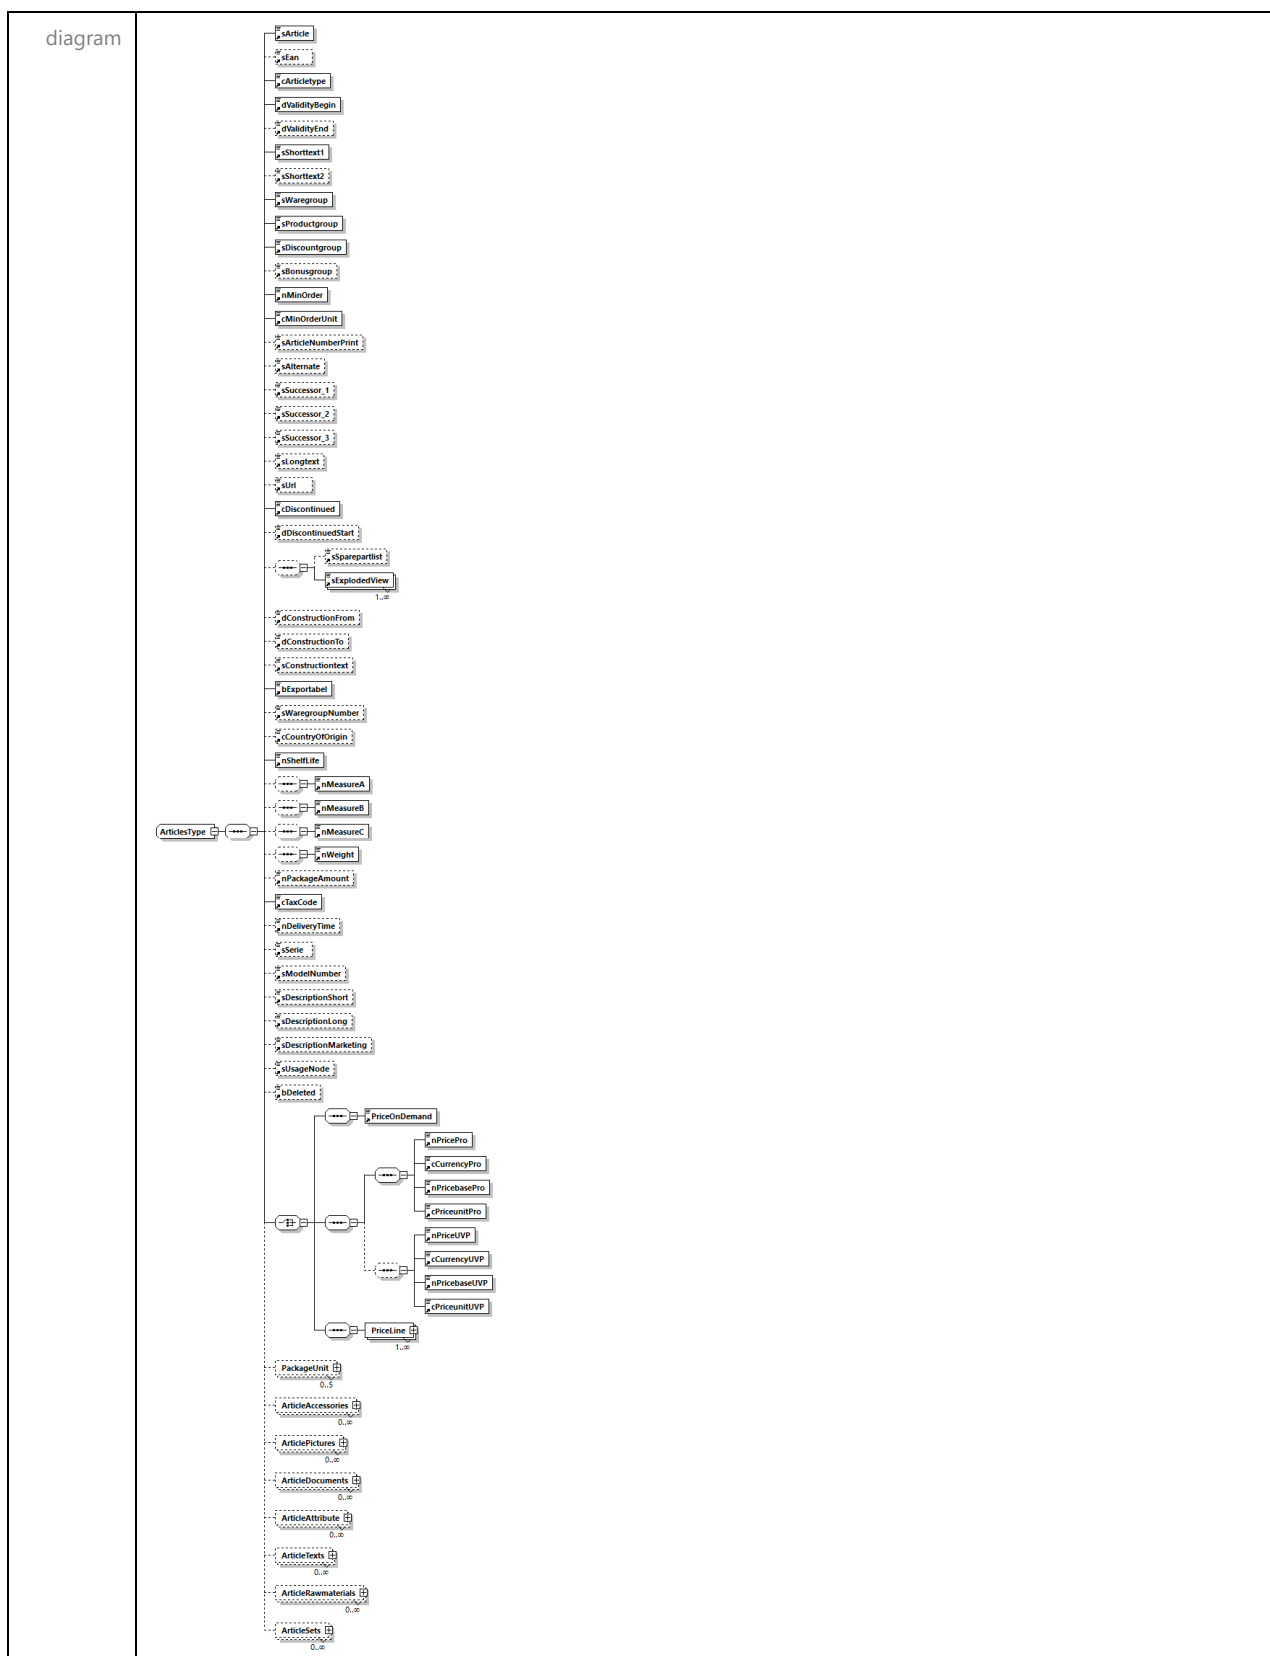
element **sWaregroup**

diagram		
type	String_3_Type	
used by	complexTypes	ArticlesType HistoricProductsType WaregroupsType
facets	Kind	Value
	minLength	1
	maxLength	3
	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ö ö \$ ß)*
source	<code><xs:element name="sWaregroup" type="String_3_Type"/></code>	

element **sWaregroupNumber**

diagram		
type	Int_8_Trennzeichen	
used by	complexType	ArticlesType
facets	Kind	Value
	minInclusive	1
	maxInclusive	99999999
source	<code><xs:element name="sWaregroupNumber" type="Int_8_Trennzeichen"/></code>	

complexType **ArticlesType**



children	sArticle sEan cArticletype dValidityBegin dValidityEnd sShorttext1 sShorttext2 sWaregroup sProductgroup sDiscountgroup sBonusgroup nMinOrder cMinOrderUnit sArticleNumberPrint sAlternate sSuccessor_1 sSuccessor_2 sSuccessor_3 sLongtext sUrl cDiscontinued dDiscontinuedStart sSparepartlist sExplodedView dConstructionFrom dConstructionTo sConstructiontext bExportabel sWaregroupNumber cCountryOfOrigin nShelfLife nMeasureA nMeasureB nMeasureC nWeight nPackageAmount cTaxCode nDeliveryTime sSerie sModelNumber sDescriptionShort sDescriptionLong sDescriptionMarketing sUsageNode bDeleted PriceOnDemand nPricePro cCurrencyPro nPricebasePro cPriceunitPro nPriceUVP cCurrencyUVP nPricebaseUVP cPriceunitUVP PriceLine PackageUnit ArticleAccessories ArticlePictures ArticleDocuments ArticleAttribute ArticleTexts ArticleRawmaterials ArticleSets
used by	element SHK StammdatenType/Articles
source	<pre> <xs:complexType name="ArticlesType"> <xs:sequence> <xs:element ref="sArticle"/> <xs:element ref="sEan" minOccurs="0"/> <xs:element ref="cArticletype"/> <xs:element ref="dValidityBegin"/> <xs:element ref="dValidityEnd" minOccurs="0"/> <xs:element ref="sShorttext1"/> <xs:element ref="sShorttext2" minOccurs="0"/> <xs:element ref="sWaregroup"/> <xs:element ref="sProductgroup"/> <xs:element ref="sDiscountgroup"/> <xs:element ref="sBonusgroup" minOccurs="0"/> <xs:element ref="nMinOrder"/> <xs:element ref="cMinOrderUnit"/> <xs:element ref="sArticleNumberPrint" minOccurs="0"/> <xs:element ref="sAlternate" minOccurs="0"/> <xs:element ref="sSuccessor_1" minOccurs="0"/> <xs:element ref="sSuccessor_2" minOccurs="0"/> <xs:element ref="sSuccessor_3" minOccurs="0"/> <xs:element ref="sLongtext" minOccurs="0"/> <xs:element ref="sUrl" minOccurs="0"/> <xs:element ref="cDiscontinued"/> <xs:element ref="dDiscontinuedStart" minOccurs="0"/> <xs:sequence minOccurs="0"> <xs:element ref="sSparepartlist" minOccurs="0"/> <xs:element ref="sExplodedView" maxOccurs="unbounded"/> </xs:sequence> <xs:element ref="dConstructionFrom" minOccurs="0"/> <xs:element ref="dConstructionTo" minOccurs="0"/> <xs:element ref="sConstructiontext" minOccurs="0"/> <xs:element ref="bExportabel"/> <xs:element ref="sWaregroupNumber" minOccurs="0"/> <xs:element ref="cCountryOfOrigin" minOccurs="0"/> <xs:element ref="nShelfLife"/> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureA"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureB"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureC"/> </xs:sequence> </xs:sequence> </pre>

```

<xs:sequence minOccurs="0">
  <xs:element ref="nWeight"/>
</xs:sequence>
<xs:element ref="nPackageAmount" minOccurs="0"/>
<xs:element ref="cTaxCode"/>
<xs:element ref="nDeliveryTime" minOccurs="0"/>
<xs:element ref="sSerie" minOccurs="0"/>
<xs:element ref="sModelNumber" minOccurs="0"/>
<xs:element ref="sDescriptionShort" minOccurs="0"/>
<xs:element ref="sDescriptionLong" minOccurs="0"/>
<xs:element ref="sDescriptionMarketing" minOccurs="0"/>
<xs:element ref="sUsageNode" minOccurs="0"/>
<xs:element ref="bDeleted" minOccurs="0"/>
<xs:choice>
  <xs:sequence>
    <xs:element ref="PriceOnDemand"/>
  </xs:sequence>
  <xs:sequence>
    <xs:sequence>
      <xs:element ref="nPricePro"/>
      <xs:element ref="cCurrencyPro"/>
      <xs:element ref="nPricebasePro"/>
      <xs:element ref="cPriceunitPro"/>
    </xs:sequence>
    <xs:sequence minOccurs="0">
      <xs:element ref="nPriceUVP"/>
      <xs:element ref="cCurrencyUVP"/>
      <xs:element ref="nPricebaseUVP"/>
      <xs:element ref="cPriceunitUVP"/>
    </xs:sequence>
  </xs:sequence>
  <xs:sequence>
    <xs:element name="PriceLine" maxOccurs="unbounded">
      <xs:complexType>
        <xs:sequence>
          <xs:element ref="sDescription"/>
          <xs:element ref="nPrice"/>
          <xs:element ref="cCurrency"/>
          <xs:element ref="nPricebase"/>
          <xs:element ref="cPriceunit"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:choice>
<xs:element name="PackageUnit" type="PackageUnitType" minOccurs="0"
maxOccurs="5"/>
<xs:element name="ArticleAccessories" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="sAccessory"/>
      <xs:element ref="nAmount"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

<xs:element name="ArticlePictures" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="sDocument"/>
      <xs:element ref="cPictureType"/>
      <xs:element ref="cPictureUse"/>
      <xs:element ref="bSubstitute"/>
      <xs:element ref="sDocDescription" minOccurs="0"/>
      <xs:element ref="nDocOrder" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleDocuments" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="sDocument"/>
      <xs:element ref="cDocumentType"/>
      <xs:element ref="sDocDescription" minOccurs="0"/>
      <xs:element ref="nDocOrder" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleAttribute" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="cAttributesystem"/>
      <xs:element ref="sAttributeclass" minOccurs="0"/>
      <xs:element ref="sAttributename"/>
      <xs:element ref="sAttributevalue"/>
      <xs:element ref="sAttributevalue2" minOccurs="0"/>
      <xs:element ref="cAttributeunit" minOccurs="0"/>
      <xs:element ref="sAttributedescription" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleTexts" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="nTextRow"/>
      <xs:element ref="sDimensiontext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleRawmaterials" minOccurs="0"
maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="cMaterial"/>
      <xs:element ref="nWeigthbase"/>
      <xs:element ref="cWeightbaseUnit"/>
      <xs:element ref="nWeightrate"/>
      <xs:element ref="cWeightrateUnit"/>
      <xs:element name="nMaterialPrice" type="Decimal_15_2"/>
    </xs:sequence>
  </xs:complexType>

```

	<pre> </xs:element> <xs:element name="ArticleSets" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sAssignedArticle"/> <xs:element ref="nQuantity"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>
--	--

element **ArticlesType/PriceLine**

diagram	
children	sDescription nPrice cCurrency nPricebase cPriceunit
source	<pre> <xs:element name="PriceLine" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDescription"/> <xs:element ref="nPrice"/> <xs:element ref="cCurrency"/> <xs:element ref="nPricebase"/> <xs:element ref="cPriceunit"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/PackageUnit**

diagram	
type	PackageUnitType
children	cPackageKind nQuantity sEan nMeasureA nMeasureB nMeasureC nWeight
source	<pre><xs:element name="PackageUnit" type="PackageUnitType" minOccurs="0" maxOccurs="5"/></pre>

element **ArticlesType/ArticleAccessories**

diagram	
children	sAccessory nAmount
source	<pre><xs:element name="ArticleAccessories" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sAccessory"/> <xs:element ref="nAmount"/> </xs:sequence> </xs:complexType> </xs:element></pre>

element **ArticlesType/ArticlePictures**

diagram	
children	sDocument cPictureType cPictureUse bSubstitute sDocDescription nDocOrder
source	<pre> <xs:element name="ArticlePictures" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cPictureType"/> <xs:element ref="cPictureUse"/> <xs:element ref="bSubstitute"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticleDocuments**

diagram	
children	sDocument cDocumentType sDocDescription nDocOrder
source	<pre> <xs:element name="ArticleDocuments" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cDocumentType"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticleAttribute**

diagram	<pre> graph LR AA[ArticleAttribute 0..∞] --> CAS[cAttributesystem] AA --> SAC[sAttributeclass] AA --> SAN[sAttributename] AA --> SAV[sAttributevalue] AA --> SAV2[sAttributevalue2] AA --> CAU[cAttributeunit] AA --> SAD[sAttributedescription] </pre>
children	cAttributesystem sAttributeclass sAttributename sAttributevalue sAttributevalue2 cAttributeunit sAttributedescription
source	<pre> <xs:element name="ArticleAttribute" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="cAttributesystem"/> <xs:element ref="sAttributeclass" minOccurs="0"/> <xs:element ref="sAttributename"/> <xs:element ref="sAttributevalue"/> <xs:element ref="sAttributevalue2" minOccurs="0"/> <xs:element ref="cAttributeunit" minOccurs="0"/> <xs:element ref="sAttributedescription" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticleTexts**

diagram	<pre> graph LR AT[ArticleTexts 0..∞] --> nTR[nTextRow] AT --> sDT[sDimensiontext] </pre>
children	nTextRow sDimensiontext
source	<pre> <xs:element name="ArticleTexts" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nTextRow"/> <xs:element ref="sDimensiontext"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticleRawmaterials**

diagram	
children	cMaterial nWeigthbase cWeigthbaseUnit nWeigthrate cWeightrateUnit nMaterialPrice
source	<pre> <xs:element name="ArticleRawmaterials" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="cMaterial"/> <xs:element ref="nWeigthbase"/> <xs:element ref="cWeigthbaseUnit"/> <xs:element ref="nWeigthrate"/> <xs:element ref="cWeightrateUnit"/> <xs:element name="nMaterialPrice" type="Decimal_15_2"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticleRawmaterials/nMaterialPrice**

diagram									
type	Decimal 15 2								
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </tbody> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<pre> <xs:element name="nMaterialPrice" type="Decimal_15_2"/> </pre>								

element **ArticlesType/ArticleSets**

diagram	
children	sAssignedArticle nQuantity

source	<pre> <xs:element name="ArticleSets" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sAssignedArticle"/> <xs:element ref="nQuantity"/> </xs:sequence> </xs:complexType> </xs:element> </pre>
--------	---

complexType **BonusgroupsType**

diagram	
children	sBonusgroup sDescription
used by	element SHK StammdatenType/Bonusgroups
source	<pre> <xs:complexType name="BonusgroupsType"> <xs:sequence> <xs:element ref="sBonusgroup"/> <xs:element ref="sDescription"/> </xs:sequence> </xs:complexType> </pre>

complexType **DiscountgroupsType**

diagram	
children	sDiscountgroup sDescription
used by	element SHK StammdatenType/Discountgroups
source	<pre> <xs:complexType name="DiscountgroupsType"> <xs:sequence> <xs:element ref="sDiscountgroup"/> <xs:element ref="sDescription"/> </xs:sequence> </xs:complexType> </pre>

complexType **HeaderType**

diagram	
children	sSupplierID sSupplierShortName sSupplierSynonym sCatalogID sCatalogDesc dValidityBegin dValidityEnd sMessageName bIncludesSystemRelevantPackagings sLUCIDNumber sPackagingDisposalProvider sTeststring
used by	element SHK StammdatenType/Header
source	<pre> <xs:complexType name="HeaderType"> <xs:sequence> <xs:element ref="sSupplierID" minOccurs="0"/> <xs:element ref="sSupplierShortName"/> <xs:element ref="sSupplierSynonym" minOccurs="0"/> <xs:element ref="sCatalogID" minOccurs="0"/> <xs:element ref="sCatalogDesc"/> <xs:element ref="dValidityBegin"/> <xs:element ref="dValidityEnd" minOccurs="0"/> <xs:element ref="sMessageName"/> <xs:element name="bIncludesSystemRelevantPackagings" type="xs:boolean"/> <xs:element name="sLUCIDNumber" type="String_20_Type" minOccurs="0"/> <xs:element name="sPackagingDisposalProvider" type="String_80_Type"/> <xs:element ref="sTeststring"/> </xs:sequence> </xs:complexType> </pre>

element **HeaderType/bIncludesSystemRelevantPackagings**

diagram	
---------	--

element **HeaderType/sLUCIDNumber**

element **HeaderType/sPackagingDisposalProvider**

10.01.2021

complexType **HistoricProductsType**

diagram	
children	sHistoricProduct dConstructionFrom dConstructionTo sConstructiontext sShorttext1 sShorttext2 sEan sWaregroup sProductgroup sSparepartlist sExplodedView HistoricProductPics HistoricProductDocs
used by	element SHK StammdatenType/HistoricProducts
source	<pre> <xs:complexType name="HistoricProductsType"> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> <xs:element ref="dConstructionTo" minOccurs="0"/> <xs:element ref="sConstructiontext" minOccurs="0"/> <xs:element ref="sShorttext1"/> <xs:element ref="sShorttext2" minOccurs="0"/> <xs:element ref="sEan" minOccurs="0"/> <xs:element ref="sWaregroup"/> <xs:element ref="sProductgroup"/> <xs:element ref="sSparepartlist"/> <xs:element ref="sExplodedView" maxOccurs="unbounded"/> <xs:element name="HistoricProductPics" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="HistoricProductDocs" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>

	<pre> <xs:element ref="cPictureType"/> <xs:element ref="cPictureUse"/> <xs:element ref="bSubstitute"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="HistoricProductDocs" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element name="cDocumentType" type="Doctype_CL_Document_HP"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>
--	--

element **HistoricProductsType/HistoricProductPics**

diagram	
children	sDocument cPictureType cPictureUse bSubstitute sDocDescription nDocOrder
source	<pre> <xs:element name="HistoricProductPics" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cPictureType"/> <xs:element ref="cPictureUse"/> <xs:element ref="bSubstitute"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **HistoricProductsType/HistoricProductDocs**

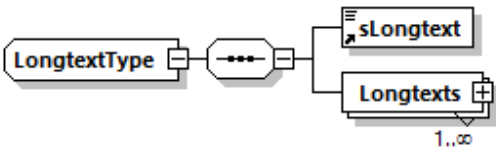
diagram	
children	sDocument cDocumentType sDocDescription nDocOrder
source	<pre> <xs:element name="HistoricProductDocs" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element name="cDocumentType" type="Doctype_CL_Document_HP"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **HistoricProductsType/HistoricProductDocs/cDocumentType**


diagram																																																			
type	Doctype CL Document HP																																																		
used by	element ArticlesType/ArticleDocuments																																																		
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr><td>enumeration</td><td>2D</td></tr> <tr><td>enumeration</td><td>2F</td></tr> <tr><td>enumeration</td><td>2S</td></tr> <tr><td>enumeration</td><td>3C</td></tr> <tr><td>enumeration</td><td>3B</td></tr> <tr><td>enumeration</td><td>3A</td></tr> <tr><td>enumeration</td><td>AN</td></tr> <tr><td>enumeration</td><td>DB</td></tr> <tr><td>enumeration</td><td>GG</td></tr> <tr><td>enumeration</td><td>IS</td></tr> <tr><td>enumeration</td><td>MA</td></tr> <tr><td>enumeration</td><td>PA</td></tr> <tr><td>enumeration</td><td>PP</td></tr> <tr><td>enumeration</td><td>ZL</td></tr> <tr><td>enumeration</td><td>SB</td></tr> <tr><td>enumeration</td><td>SF</td></tr> <tr><td>enumeration</td><td>PF</td></tr> <tr><td>enumeration</td><td>TI</td></tr> <tr><td>enumeration</td><td>TZ</td></tr> <tr><td>enumeration</td><td>VI</td></tr> <tr><td>enumeration</td><td>WA</td></tr> <tr><td>enumeration</td><td>LE</td></tr> <tr><td>enumeration</td><td>EL</td></tr> <tr><td>enumeration</td><td>UP</td></tr> </tbody> </table>	Kind	Value	enumeration	2D	enumeration	2F	enumeration	2S	enumeration	3C	enumeration	3B	enumeration	3A	enumeration	AN	enumeration	DB	enumeration	GG	enumeration	IS	enumeration	MA	enumeration	PA	enumeration	PP	enumeration	ZL	enumeration	SB	enumeration	SF	enumeration	PF	enumeration	TI	enumeration	TZ	enumeration	VI	enumeration	WA	enumeration	LE	enumeration	EL	enumeration	UP
Kind	Value																																																		
enumeration	2D																																																		
enumeration	2F																																																		
enumeration	2S																																																		
enumeration	3C																																																		
enumeration	3B																																																		
enumeration	3A																																																		
enumeration	AN																																																		
enumeration	DB																																																		
enumeration	GG																																																		
enumeration	IS																																																		
enumeration	MA																																																		
enumeration	PA																																																		
enumeration	PP																																																		
enumeration	ZL																																																		
enumeration	SB																																																		
enumeration	SF																																																		
enumeration	PF																																																		
enumeration	TI																																																		
enumeration	TZ																																																		
enumeration	VI																																																		
enumeration	WA																																																		
enumeration	LE																																																		
enumeration	EL																																																		
enumeration	UP																																																		

	enumeration WL
	enumeration VP
	enumeration VM
	enumeration VT
	enumeration EP
	enumeration BS
	enumeration EX
	enumeration KS
	enumeration CE
	enumeration VD
	enumeration SS
	enumeration PL
source	<code><xs:element name="cDocumentType" type="Doctype_CL_Document_HP"/></code>

complexType **LongtextType**

diagram	
children	sLongtext Longtexts
used by	element SHK StammdatenType/Longtext
source	<pre> <xs:complexType name="LongtextType"> <xs:sequence> <xs:element ref="sLongtext"/> <xs:element name="Longtexts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nTextRow"/> <xs:element name="sText" type="String_0_40_Type"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>

element **LongtextType/Longtexts**


diagram	
children	nTextRow sText
source	<pre> <xs:element name="Longtexts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nTextRow"/> <xs:element name="sText" type="String_0_40_Type"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

```

    </xs:sequence>
  </xs:complexType>
</xs:element>

```

element **LongtextType/Longtexts/sText**

diagram									
type	String 0_40_Type								
used by	elements SparepartlistsType/Spareparts/ArticleRow SparepartlistsType/Spareparts/TextRow								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß)*</td></tr> </tbody> </table>	Kind	Value	minLength	0	maxLength	40	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß)*
Kind	Value								
minLength	0								
maxLength	40								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß)*								
source	<code><xs:element name="sText" type="String_0_40_Type"/></code>								

complexType PackageUnitType

diagram	
children	cPackageKind nQuantity sEan nMeasureA nMeasureB nMeasureC nWeight
used by	element ArticlesType/PackageUnit
source	<pre> <xs:complexType name="PackageUnitType"> <xs:sequence> <xs:element ref="cPackageKind"/> <xs:element ref="nQuantity"/> <xs:element ref="sEan" minOccurs="0"/> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureA"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureB"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureC"/> </xs:sequence> </xs:sequence> </complexType> </pre>

	<pre> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nWeight"/> </xs:sequence> </xs:sequence> </xs:complexType> </pre>
--	---

complexType **ProductgroupsType**

diagram	<pre> sequenceDiagram participant ProductgroupsType ProductgroupsType --> sProductgroup ProductgroupsType --> sDescription </pre>
children	sProductgroup sDescription
used by	element SHK StammdatenType/Productgroups
source	<pre> <xs:complexType name="ProductgroupsType"> <xs:sequence> <xs:element ref="sProductgroup"/> <xs:element ref="sDescription"/> </xs:sequence> </xs:complexType> </pre>

complexType **SHK_StammdatenType**

diagram					
children	Header Waregroups Productgroups Discountgroups Bonusgroups Articles Longtext HistoricProducts Sparepartlists				
used by	element SHK_Stammdaten				
attributes	Name version	Type xs:string	Use required	Default	Fixed 7.0
source	<pre> <xs:complexType name="SHK_StammdatenType"> <xs:sequence> <xs:element name="Header" type="HeaderType"/> <xs:element name="Waregroups" type="WaregroupsType" maxOccurs="unbounded"/> <xs:element name="Productgroups" type="ProductgroupsType" maxOccurs="unbounded"/> <xs:element name="Discountgroups" type="DiscountgroupsType" maxOccurs="unbounded"/> <xs:element name="Bonusgroups" type="BonusgroupsType" minOccurs="0" maxOccurs="unbounded"/> <xs:element name="Articles" type="ArticlesType" maxOccurs="unbounded"> <xs:key name="ArticleAccessoriesID"> </pre>				

```

        <xs:selector xpath="ArticleAccessories"/>
        <xs:field xpath="sAccessory"/>
    </xs:key>
    <xs:key name="ArticleDocsID">
        <xs:selector xpath="ArticleDocuments"/>
        <xs:field xpath="sDocument"/>
        <xs:field xpath="cDocumentType"/>
    </xs:key>
    <xs:key name="ArticlePicID">
        <xs:selector xpath="ArticlePictures"/>
        <xs:field xpath="sDocument"/>
    </xs:key>
    <xs:key name="ArticleAttributeID">
        <xs:selector xpath="ArticleAttribute"/>
        <xs:field xpath="cAttributesystem"/>
        <xs:field xpath="sAttributename"/>
        <xs:field xpath="sAttributevalue"/>
    </xs:key>
    <xs:key name="ArticleTextsID">
        <xs:selector xpath="ArticleTexts"/>
        <xs:field xpath="nTextRow"/>
    </xs:key>
    <xs:key name="ArticleRawmaterialID">
        <xs:selector xpath="ArticleRawmaterials"/>
        <xs:field xpath="cMaterial"/>
    </xs:key>
    <xs:key name="ArticleSetsID">
        <xs:selector xpath="ArticleSets"/>
        <xs:field xpath="sAssignedArticle"/>
    </xs:key>
    <xs:key name="ArticlePackageUnitID">
        <xs:selector xpath="PackageUnit"/>
        <xs:field xpath="cPackageKind"/>
        <xs:field xpath="nQuantity"/>
    </xs:key>
    <xs:key name="ArticlePriceLineID">
        <xs:selector xpath="PriceLine"/>
        <xs:field xpath="sDescription"/>
    </xs:key>
</xs:element>
<xs:element name="Longtext" type="LongtextType" minOccurs="0"
maxOccurs="unbounded">
    <xs:key name="LongtextRowID">
        <xs:selector xpath="Longtexts"/>
        <xs:field xpath="nTextRow"/>
    </xs:key>
</xs:element>
<xs:element name="HistoricProducts" type="HistoricProductsType"
minOccurs="0" maxOccurs="unbounded">
    <xs:key name="HPDocs">
        <xs:selector xpath="HistoricProductDocs"/>
        <xs:field xpath="sDocument"/>
        <xs:field xpath="cDocumentType"/>
    </xs:key>
    <xs:key name="HPPics">

```

```

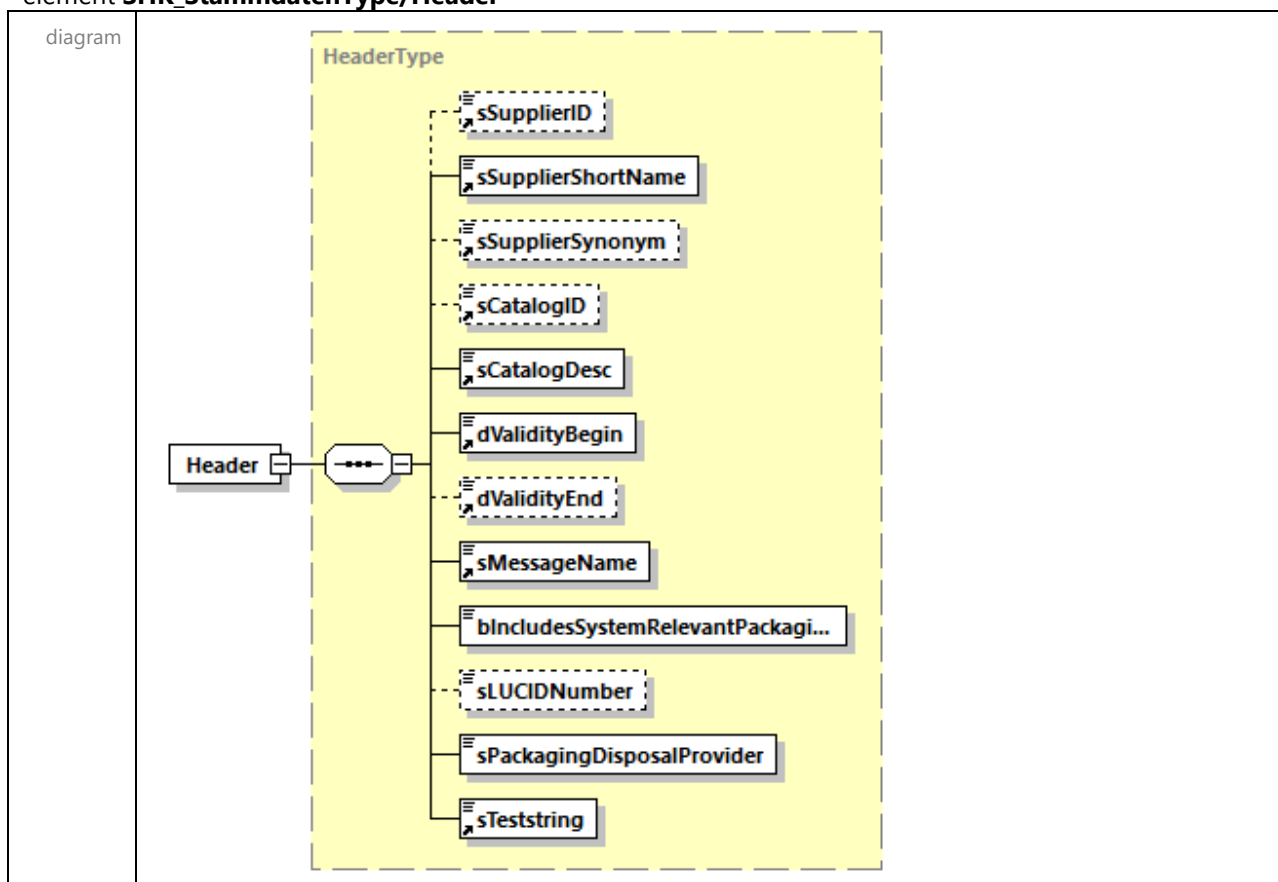
        <xs:selector xpath="HistoricProductPics"/>
        <xs:field xpath="sDocument"/>
      </xs:key>
    </xs:element>
    <xs:element name="Sparepartlists" type="SparepartlistsType" minOccurs="0"
maxOccurs="unbounded">
      <xs:key name="SparepartRowID">
        <xs:selector xpath="Spareparts"/>
        <xs:field xpath="nRow"/>
      </xs:key>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="version" type="xs:string" use="required" fixed="7.0"/>
</xs:complexType>

```

attribute **SHK_StammdatenType/@version**

type	xs:string
source	<xs:attribute name="version" type="xs:string" use="required" fixed="7.0"/>

element **SHK_StammdatenType/Header**



type	HeaderType
children	sSupplierID sSupplierShortName sSupplierSynonym sCatalogID sCatalogDesc dValidityBegin dValidityEnd sMessageName bIncludesSystemRelevantPackagings sLUCIDNumber sPackagingDisposalProvider sTeststring
source	<code><xs:element name="Header" type="HeaderType"/></code>

element **SHK_StammdatenType/Waregroups**

diagram	
type	WaregroupsType
children	sWaregroup sDescription
source	<code><xs:element name="Waregroups" type="WaregroupsType" maxOccurs="unbounded"/></code>

element **SHK_StammdatenType/Productgroups**

diagram	
type	ProductgroupsType
children	sProductgroup sDescription
source	<code><xs:element name="Productgroups" type="ProductgroupsType" maxOccurs="unbounded"/></code>

element **SHK_StammdatenType/Discountgroups**

diagram	
type	DiscountgroupsType
children	sDiscountgroup sDescription

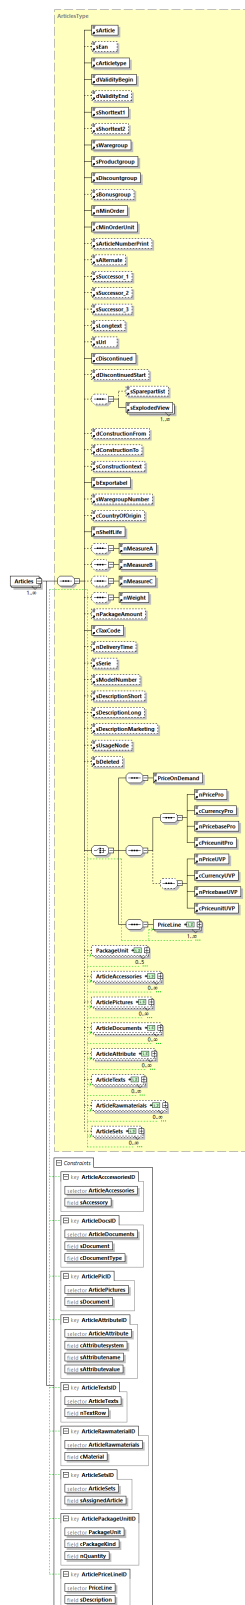
source	<code><xs:element name="Discountgroups" type="DiscountgroupsType" maxOccurs="unbounded"/></code>
--------	--

element **SHK_StammdatenType/Bonusgroups**

diagram	
type	BonusgroupsType
children	sBonusgroup sDescription
source	<code><xs:element name="Bonusgroups" type="BonusgroupsType" minOccurs="0" maxOccurs="unbounded"/></code>

element **SHK_StammdatenType/Articles**

diagram



type	ArticlesType				
children	sArticle sEan cArticletype dValidityBegin dValidityEnd sShorttext1 sShorttext2 sWaregroup sProductgroup sDiscountgroup sBonusgroup nMinOrder cMinOrderUnit sArticleNumberPrint sAlternate sSuccessor 1 sSuccessor 2 sSuccessor 3 sLongtext sUrl cDiscontinued dDiscontinuedStart sSparepartlist sExplodedView dConstructionFrom dConstructionTo sConstructiontext bExportabel sWaregroupNumber cCountryOfOrigin nShelfLife nMeasureA nMeasureB nMeasureC nWeight nPackageAmount cTaxCode nDeliveryTime sSerie sModelNumber sDescriptionShort sDescriptionLong sDescriptionMarketing sUsageNode bDeleted PriceOnDemand nPricePro cCurrencyPro nPricebasePro cPriceunitPro nPriceUVP cCurrencyUVP nPricebaseUVP cPriceunitUVP PriceLine PackageUnit ArticleAccessories ArticlePictures ArticleDocuments ArticleAttribute ArticleTexts ArticleRawmaterials ArticleSets				
identity constraints		Name	Refer	Selector	Field(s)
	key	ArticleAccessoriesID		ArticleAccessories	sAccessory
	key	ArticleDocsID		ArticleDocuments	sDocument
					cDocumentType
	key	ArticlePicID		ArticlePictures	sDocument
	key	ArticleAttributeID		ArticleAttribute	cAttributesystem
					sAttributename
					sAttributevalue
	key	ArticleTextsID		ArticleTexts	nTextRow
	key	ArticleRawmaterialID		ArticleRawmaterials	cMaterial
	key	ArticleSetsID		ArticleSets	sAssignedArticle
	key	ArticlePackageUnitID		PackageUnit	cPackageKind
					nQuantity
	key	ArticlePriceLineID		PriceLine	sDescription
source	<pre><xs:element name="Articles" type="ArticlesType" maxOccurs="unbounded"> <xs:key name="ArticleAccessoriesID"> <xs:selector xpath="ArticleAccessories"/> <xs:field xpath="sAccessory"/> </xs:key> <xs:key name="ArticleDocsID"> <xs:selector xpath="ArticleDocuments"/> <xs:field xpath="sDocument"/> <xs:field xpath="cDocumentType"/> </xs:key> <xs:key name="ArticlePicID"> <xs:selector xpath="ArticlePictures"/> <xs:field xpath="sDocument"/> </xs:key> <xs:key name="ArticleAttributeID"> <xs:selector xpath="ArticleAttribute"/> <xs:field xpath="cAttributesystem"/> <xs:field xpath="sAttributename"/> <xs:field xpath="sAttributevalue"/> </xs:key> <xs:key name="ArticleTextsID"> <xs:selector xpath="ArticleTexts"/> <xs:field xpath="nTextRow"/> </xs:key> <xs:key name="ArticleRawmaterialID"> <xs:selector xpath="ArticleRawmaterials"/> <xs:field xpath="cMaterial"/> </xs:key> <xs:key name="ArticleSetsID"></pre>				

	<pre> <xs:selector xpath="ArticleSets"/> <xs:field xpath="sAssignedArticle"/> </xs:key> <xs:key name="ArticlePackageUnitID"> <xs:selector xpath="PackageUnit"/> <xs:field xpath="cPackageKind"/> <xs:field xpath="nQuantity"/> </xs:key> <xs:key name="ArticlePriceLineID"> <xs:selector xpath="PriceLine"/> <xs:field xpath="sDescription"/> </xs:key> </xs:element> </pre>
--	--

element **SHK_StammdatenType/Longtext**

diagram					
type	LongtextType				
children	sLongtext Longtexts				
identity constraints	key	Name	Refer	Selector	Field(s)
		LongtextRowID		Longtexts	nTextRow
source	<pre> <xs:element name="Longtext" type="LongtextType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="LongtextRowID"> <xs:selector xpath="Longtexts"/> <xs:field xpath="nTextRow"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/HistoricProducts**

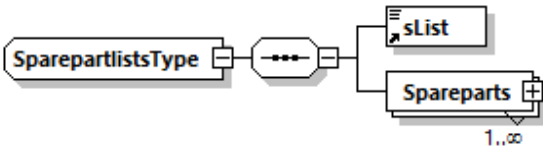
diagram	
type	HistoricProductsType
children	sHistoricProduct dConstructionFrom dConstructionTo sConstructiontext sShorttext1 sShorttext2 sEan sWaregroup

	sProductgroup sSparepartlist sExplodedView HistoricProductPics HistoricProductDocs				
identity constraints		Name	Refer	Selector	Field(s)
	key	HPDocs		HistoricProductDocs	sDocument cDocumentType
	key	HPPics		HistoricProductPics	sDocument
source	<pre> <xs:element name="HistoricProducts" type="HistoricProductsType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="HPDocs"> <xs:selector xpath="HistoricProductDocs"/> <xs:field xpath="sDocument"/> <xs:field xpath="cDocumentType"/> </xs:key> <xs:key name="HPPics"> <xs:selector xpath="HistoricProductPics"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </pre>				

element SHK_StammdatenType/Sparepartlists

diagram					
type	SparepartlistsType				
children	sList Spareparts				
identity constraints		Name	Refer	Selector	Field(s)
	key	SparepartRowID		Spareparts	nRow
source	<pre> <xs:element name="Sparepartlists" type="SparepartlistsType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="SparepartRowID"> <xs:selector xpath="Spareparts"/> <xs:field xpath="nRow"/> </xs:key> </xs:element> </pre>				

complexType **SparepartlistsType**

diagram	
children	sList Spareparts
used by	element SHK StammdatenType/Sparepartlists
source	<pre> <xs:complexType name="SparepartlistsType"> <xs:sequence> <xs:element ref="sList"/> <xs:element name="Spareparts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nRow"/> <xs:choice> <xs:element name="TextRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition" minOccurs="0"/> <xs:element ref="sText"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="ArticleRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition"/> <xs:element ref="sPricegroup" minOccurs="0"/> <xs:element ref="sText"/> <xs:choice> <xs:element name="LinkedArticle"> <xs:complexType> <xs:sequence> <xs:element ref="sSparepart"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="LinkedHistoricProduct"> <xs:complexType> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>

```

</xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>

```

element SparepartlistsType/Spareparts

diagram	
children	nRow TextRow ArticleRow
source	<pre> <xs:element name="Spareparts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nRow"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

	<pre> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </pre>
--	--

element **SparepartlistsType/Spareparts/TextRow**

diagram	
children	sPosition sText
source	<pre> <xs:element name="TextRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition" minOccurs="0"/> <xs:element ref="sText"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **SparepartlistsType/Spareparts/ArticleRow**

diagram	
children	sPosition sPricegroup sText LinkedArticle LinkedHistoricProduct
source	<pre> <xs:element name="ArticleRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition"/> <xs:element ref="sPricegroup" minOccurs="0"/> <xs:element ref="sText"/> <xs:choice> <xs:element name="LinkedArticle"> <xs:complexType> <xs:sequence> <xs:element ref="sSparepart"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:complexType> </xs:element> </pre>

	<pre> <xs:element name="LinkedHistoricProduct"> <xs:complexType> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </pre>
--	---


element **SparepartlistsType/Spareparts/ArticleRow/LinkedArticle**

diagram	
children	sSparepart
source	<pre> <xs:element name="LinkedArticle"> <xs:complexType> <xs:sequence> <xs:element ref="sSparepart"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct**

diagram	
children	sHistoricProduct dConstructionFrom
source	<pre> <xs:element name="LinkedHistoricProduct"> <xs:complexType> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

complexType **WaregroupsType**

diagram	
children	sWaregroup sDescription
used by	element SHK_StammdatenType/Waregroups
source	<pre> <xs:complexType name="WaregroupsType"> <xs:sequence> <xs:element ref="sWaregroup"/> <xs:element ref="sDescription"/> </xs:sequence> </xs:complexType> </pre>

simpleType **Articletype**

type	restriction of Erlaubte Zeichen																														
used by	element cArticletype																														
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>([0-9; = > \? &#x40; [A-Z] \^ _ [a-z] ü Ü ä Ä ö Ö ß)*</td></tr> <tr> <td>enumeration</td><td>STD</td></tr> <tr> <td>enumeration</td><td>ERA</td></tr> <tr> <td>enumeration</td><td>ERB</td></tr> <tr> <td>enumeration</td><td>ERC</td></tr> <tr> <td>enumeration</td><td>VA</td></tr> <tr> <td>enumeration</td><td>MA</td></tr> <tr> <td>enumeration</td><td>DLS</td></tr> <tr> <td>enumeration</td><td>PAK</td></tr> <tr> <td>enumeration</td><td>SON</td></tr> <tr> <td>enumeration</td><td>KAL</td></tr> <tr> <td>enumeration</td><td>STG</td></tr> <tr> <td>enumeration</td><td>PLA</td></tr> <tr> <td>enumeration</td><td>GEB</td></tr> </tbody> </table>	Kind	Value	pattern	([0-9; = > \? @ [A-Z] \^ _ [a-z] ü Ü ä Ä ö Ö ß)*	enumeration	STD	enumeration	ERA	enumeration	ERB	enumeration	ERC	enumeration	VA	enumeration	MA	enumeration	DLS	enumeration	PAK	enumeration	SON	enumeration	KAL	enumeration	STG	enumeration	PLA	enumeration	GEB
Kind	Value																														
pattern	([0-9; = > \? @ [A-Z] \^ _ [a-z] ü Ü ä Ä ö Ö ß)*																														
enumeration	STD																														
enumeration	ERA																														
enumeration	ERB																														
enumeration	ERC																														
enumeration	VA																														
enumeration	MA																														
enumeration	DLS																														
enumeration	PAK																														
enumeration	SON																														
enumeration	KAL																														
enumeration	STG																														
enumeration	PLA																														
enumeration	GEB																														
source	<pre> <xs:simpleType name="Articletype"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="STD"/> <xs:enumeration value="ERA"/> <xs:enumeration value="ERB"/> <xs:enumeration value="ERC"/> <xs:enumeration value="VA"/> <xs:enumeration value="MA"/> <xs:enumeration value="DLS"/> <xs:enumeration value="PAK"/> <xs:enumeration value="SON"/> <xs:enumeration value="KAL"/> <xs:enumeration value="STG"/> <xs:enumeration value="PLA"/> <xs:enumeration value="GEB"/> </xs:restriction> </xs:simpleType> </pre>																														

type	restriction of Erlaubte Zeichen								
used by	element sArticle								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü Ü ä Ä ö Ö ß)*</td></tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	15	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Ü ä Ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	15								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Ü ä Ä ö Ö ß)*								
source	<pre><xs:simpleType name="Artikelnummer"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="15"/> </xs:restriction> </xs:simpleType></pre>								

type	restriction of Erlaubte_Zeichen																		
used by	element cAttributesystem																		
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü ä Ä ö Ö § ß)*</td></tr> <tr> <td>enumeration</td><td>INDIV</td></tr> <tr> <td>enumeration</td><td>ETIM 6</td></tr> <tr> <td>enumeration</td><td>ETIM 7</td></tr> <tr> <td>enumeration</td><td>ETIM 8</td></tr> <tr> <td>enumeration</td><td>ZVSHK</td></tr> <tr> <td>enumeration</td><td>Gebühren</td></tr> <tr> <td>enumeration</td><td>Regulations</td></tr> </tbody> </table>	Kind	Value	pattern	(! " # $ & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ [a-z] ü ä Ä ö Ö § ß)*	enumeration	INDIV	enumeration	ETIM 6	enumeration	ETIM 7	enumeration	ETIM 8	enumeration	ZVSHK	enumeration	Gebühren	enumeration	Regulations
Kind	Value																		
pattern	(! " # $ & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ [a-z] ü ä Ä ö Ö § ß)*																		
enumeration	INDIV																		
enumeration	ETIM 6																		
enumeration	ETIM 7																		
enumeration	ETIM 8																		
enumeration	ZVSHK																		
enumeration	Gebühren																		
enumeration	Regulations																		
source	<pre> <xs:simpleType name="Attributesystem_CL"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="INDIV"/> <xs:enumeration value="ETIM 6"/> <xs:enumeration value="ETIM 7"/> <xs:enumeration value="ETIM 8"/> <xs:enumeration value="ZVSHK"/> <xs:enumeration value="Gebühren"/> <xs:enumeration value="Regulations"/> </xs:restriction> </xs:simpleType> </pre>																		

type	restriction of Erlaubte Zeichen
used by	element cCountryOfOrigin
facets	Kind Value pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\) \\\" \+ _ &#x2D;\. \/ [0-9! &#x3C; = > ~ &#x40; [A-Z] \[\] \[a-z]\ \[\] ä \ö \ø \S)*

enumeration	AF
enumeration	EG
enumeration	AX
enumeration	AL
enumeration	DZ
enumeration	AS
enumeration	VI
enumeration	AD
enumeration	AO
enumeration	AI
enumeration	AQ
enumeration	AG
enumeration	GQ
enumeration	AR
enumeration	AM
enumeration	AW
enumeration	AC
enumeration	AZ
enumeration	ET
enumeration	AU
enumeration	BS
enumeration	BH
enumeration	BD
enumeration	BB
enumeration	BY
enumeration	BE
enumeration	BZ
enumeration	BJ
enumeration	BM
enumeration	BT
enumeration	BO
enumeration	BQ
enumeration	BA
enumeration	BW
enumeration	BV
enumeration	BR
enumeration	VG
enumeration	IO
enumeration	BN
enumeration	BG
enumeration	BF
enumeration	BU
enumeration	BI
enumeration	EA
enumeration	CL
enumeration	CN
enumeration	CP
enumeration	CK
enumeration	CR
enumeration	CI
enumeration	CW
enumeration	DK
enumeration	DE
enumeration	DG
enumeration	DM
enumeration	DO
enumeration	DJ
enumeration	EC
enumeration	SV
enumeration	ER

enumeration	EE
enumeration	CE
enumeration	EU
enumeration	FK
enumeration	FO
enumeration	FJ
enumeration	FI
enumeration	FR
enumeration	FX
enumeration	GF
enumeration	PF
enumeration	TF
enumeration	GA
enumeration	GM
enumeration	GE
enumeration	GH
enumeration	GI
enumeration	GD
enumeration	GR
enumeration	GL
enumeration	GP
enumeration	GU
enumeration	GT
enumeration	GG
enumeration	GN
enumeration	GW
enumeration	GY
enumeration	HT
enumeration	HM
enumeration	HN
enumeration	HK
enumeration	IN
enumeration	ID
enumeration	IM
enumeration	IQ
enumeration	IR
enumeration	IE
enumeration	IS
enumeration	IL
enumeration	IT
enumeration	JM
enumeration	JP
enumeration	YE
enumeration	JE
enumeration	JO
enumeration	YU
enumeration	KY
enumeration	KH
enumeration	CM
enumeration	CA
enumeration	IC
enumeration	CV
enumeration	KZ
enumeration	QA
enumeration	KE
enumeration	KG
enumeration	KI
enumeration	CC
enumeration	CO
enumeration	KM

enumeration	CD
enumeration	CG
enumeration	KP
enumeration	KR
enumeration	HR
enumeration	CU
enumeration	KW
enumeration	LA
enumeration	LS
enumeration	LV
enumeration	LB
enumeration	LR
enumeration	LY
enumeration	LI
enumeration	LT
enumeration	LU
enumeration	MO
enumeration	MG
enumeration	MW
enumeration	MY
enumeration	MV
enumeration	ML
enumeration	MT
enumeration	MA
enumeration	MH
enumeration	MQ
enumeration	MR
enumeration	MU
enumeration	YT
enumeration	MK
enumeration	MX
enumeration	FM
enumeration	MD
enumeration	MC
enumeration	MN
enumeration	ME
enumeration	MS
enumeration	MZ
enumeration	MM
enumeration	NA
enumeration	NR
enumeration	NP
enumeration	NC
enumeration	NZ
enumeration	NT
enumeration	NI
enumeration	NL
enumeration	AN
enumeration	NE
enumeration	NG
enumeration	NU
enumeration	MP
enumeration	NF
enumeration	NO
enumeration	OM
enumeration	AT
enumeration	TL
enumeration	PK
enumeration	PS
enumeration	PW

enumeration	PA
enumeration	PG
enumeration	PY
enumeration	PE
enumeration	PH
enumeration	PN
enumeration	PL
enumeration	PT
enumeration	PR
enumeration	RE
enumeration	RW
enumeration	RO
enumeration	RU
enumeration	SB
enumeration	BL
enumeration	MF
enumeration	ZM
enumeration	WS
enumeration	SM
enumeration	ST
enumeration	SA
enumeration	SE
enumeration	CH
enumeration	SN
enumeration	RS
enumeration	CS
enumeration	SC
enumeration	SL
enumeration	ZW
enumeration	SG
enumeration	SX
enumeration	SK
enumeration	SI
enumeration	SO
enumeration	ES
enumeration	LK
enumeration	SH
enumeration	KN
enumeration	LC
enumeration	PM
enumeration	VC
enumeration	ZA
enumeration	SD
enumeration	GS
enumeration	SS
enumeration	SR
enumeration	SJ
enumeration	SZ
enumeration	SY
enumeration	TJ
enumeration	TW
enumeration	TZ
enumeration	TH
enumeration	TG
enumeration	TK
enumeration	TO
enumeration	TT
enumeration	TA
enumeration	TD
enumeration	CZ

	enumeration CS enumeration TN enumeration TR enumeration TM enumeration TC enumeration TV enumeration SU enumeration UG enumeration UA enumeration HU enumeration UM enumeration UY enumeration UZ enumeration VU enumeration VA enumeration VE enumeration AE enumeration US enumeration GB enumeration VN enumeration WF enumeration CX enumeration EH enumeration ZR enumeration CF enumeration CY enumeration QU
source	<pre> <xs:simpleType name="Countries"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="AF"/> <xs:enumeration value="EG"/> <xs:enumeration value="AX"/> <xs:enumeration value="AL"/> <xs:enumeration value="DZ"/> <xs:enumeration value="AS"/> <xs:enumeration value="VI"/> <xs:enumeration value="AD"/> <xs:enumeration value="AO"/> <xs:enumeration value="AI"/> <xs:enumeration value="AQ"/> <xs:enumeration value="AG"/> <xs:enumeration value="GQ"/> <xs:enumeration value="AR"/> <xs:enumeration value="AM"/> <xs:enumeration value="AW"/> <xs:enumeration value="AC"/> <xs:enumeration value="AZ"/> <xs:enumeration value="ET"/> <xs:enumeration value="AU"/> <xs:enumeration value="BS"/> <xs:enumeration value="BH"/> <xs:enumeration value="BD"/> <xs:enumeration value="BB"/> <xs:enumeration value="BY"/> <xs:enumeration value="BE"/> <xs:enumeration value="BZ"/> <xs:enumeration value="BJ"/> </pre>

	<pre><xs:enumeration value="BM"/> <xs:enumeration value="BT"/> <xs:enumeration value="BO"/> <xs:enumeration value="BQ"/> <xs:enumeration value="BA"/> <xs:enumeration value="BW"/> <xs:enumeration value="BV"/> <xs:enumeration value="BR"/> <xs:enumeration value="VG"/> <xs:enumeration value="IO"/> <xs:enumeration value="BN"/> <xs:enumeration value="BG"/> <xs:enumeration value="BF"/> <xs:enumeration value="BU"/> <xs:enumeration value="BI"/> <xs:enumeration value="EA"/> <xs:enumeration value="CL"/> <xs:enumeration value="CN"/> <xs:enumeration value="CP"/> <xs:enumeration value="CK"/> <xs:enumeration value="CR"/> <xs:enumeration value="CI"/> <xs:enumeration value="CW"/> <xs:enumeration value="DK"/> <xs:enumeration value="DE"/> <xs:enumeration value="DG"/> <xs:enumeration value="DM"/> <xs:enumeration value="DO"/> <xs:enumeration value="DJ"/> <xs:enumeration value="EC"/> <xs:enumeration value="SV"/> <xs:enumeration value="ER"/> <xs:enumeration value="EE"/> <xs:enumeration value="CE"/> <xs:enumeration value="EU"/> <xs:enumeration value="FK"/> <xs:enumeration value="FO"/> <xs:enumeration value="FJ"/> <xs:enumeration value="FI"/> <xs:enumeration value="FR"/> <xs:enumeration value="FX"/> <xs:enumeration value="GF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TF"/> <xs:enumeration value="GA"/> <xs:enumeration value="GM"/> <xs:enumeration value="GE"/> <xs:enumeration value="GH"/> <xs:enumeration value="GI"/> <xs:enumeration value="GD"/> <xs:enumeration value="GR"/> <xs:enumeration value="GL"/> <xs:enumeration value="GP"/> <xs:enumeration value="GU"/> <xs:enumeration value="GT"/></pre>
--	---

	<pre><xs:enumeration value="GG"/> <xs:enumeration value="GN"/> <xs:enumeration value="GW"/> <xs:enumeration value="GY"/> <xs:enumeration value="HT"/> <xs:enumeration value="HM"/> <xs:enumeration value="HN"/> <xs:enumeration value="HK"/> <xs:enumeration value="IN"/> <xs:enumeration value="ID"/> <xs:enumeration value="IM"/> <xs:enumeration value="IQ"/> <xs:enumeration value="IR"/> <xs:enumeration value="IE"/> <xs:enumeration value="IS"/> <xs:enumeration value="IL"/> <xs:enumeration value="IT"/> <xs:enumeration value="JM"/> <xs:enumeration value="JP"/> <xs:enumeration value="YE"/> <xs:enumeration value="JE"/> <xs:enumeration value="JO"/> <xs:enumeration value="YU"/> <xs:enumeration value="KY"/> <xs:enumeration value="KH"/> <xs:enumeration value="CM"/> <xs:enumeration value="CA"/> <xs:enumeration value="IC"/> <xs:enumeration value="CV"/> <xs:enumeration value="KZ"/> <xs:enumeration value="QA"/> <xs:enumeration value="KE"/> <xs:enumeration value="KG"/> <xs:enumeration value="KI"/> <xs:enumeration value="CC"/> <xs:enumeration value="CO"/> <xs:enumeration value="KM"/> <xs:enumeration value="CD"/> <xs:enumeration value="CG"/> <xs:enumeration value="KP"/> <xs:enumeration value="KR"/> <xs:enumeration value="HR"/> <xs:enumeration value="CU"/> <xs:enumeration value="KW"/> <xs:enumeration value="LA"/> <xs:enumeration value="LS"/> <xs:enumeration value="LV"/> <xs:enumeration value="LB"/> <xs:enumeration value="LR"/> <xs:enumeration value="LY"/> <xs:enumeration value="LI"/> <xs:enumeration value="LT"/> <xs:enumeration value="LU"/> <xs:enumeration value="MO"/> <xs:enumeration value="MG"/></pre>
--	---

	<pre><xs:enumeration value="MW"/> <xs:enumeration value="MY"/> <xs:enumeration value="MV"/> <xs:enumeration value="ML"/> <xs:enumeration value="MT"/> <xs:enumeration value="MA"/> <xs:enumeration value="MH"/> <xs:enumeration value="MQ"/> <xs:enumeration value="MR"/> <xs:enumeration value="MU"/> <xs:enumeration value="YT"/> <xs:enumeration value="MK"/> <xs:enumeration value="MX"/> <xs:enumeration value="FM"/> <xs:enumeration value="MD"/> <xs:enumeration value="MC"/> <xs:enumeration value="MN"/> <xs:enumeration value="ME"/> <xs:enumeration value="MS"/> <xs:enumeration value="MZ"/> <xs:enumeration value="MM"/> <xs:enumeration value="NA"/> <xs:enumeration value="NR"/> <xs:enumeration value="NP"/> <xs:enumeration value="NC"/> <xs:enumeration value="NZ"/> <xs:enumeration value="NT"/> <xs:enumeration value="NI"/> <xs:enumeration value="NL"/> <xs:enumeration value="AN"/> <xs:enumeration value="NE"/> <xs:enumeration value="NG"/> <xs:enumeration value="NU"/> <xs:enumeration value="MP"/> <xs:enumeration value="NF"/> <xs:enumeration value="NO"/> <xs:enumeration value="OM"/> <xs:enumeration value="AT"/> <xs:enumeration value="TL"/> <xs:enumeration value="PK"/> <xs:enumeration value="PS"/> <xs:enumeration value="PW"/> <xs:enumeration value="PA"/> <xs:enumeration value="PG"/> <xs:enumeration value="PY"/> <xs:enumeration value="PE"/> <xs:enumeration value="PH"/> <xs:enumeration value="PN"/> <xs:enumeration value="PL"/> <xs:enumeration value="PT"/> <xs:enumeration value="PR"/> <xs:enumeration value="RE"/> <xs:enumeration value="RW"/> <xs:enumeration value="RO"/> <xs:enumeration value="RU"/></pre>
--	---

```

<xs:enumeration value="SB"/>
<xs:enumeration value="BL"/>
<xs:enumeration value="MF"/>
<xs:enumeration value="ZM"/>
<xs:enumeration value="WS"/>
<xs:enumeration value="SM"/>
<xs:enumeration value="ST"/>
<xs:enumeration value="SA"/>
<xs:enumeration value="SE"/>
<xs:enumeration value="CH"/>
<xs:enumeration value="SN"/>
<xs:enumeration value="RS"/>
<xs:enumeration value="CS"/>
<xs:enumeration value="SC"/>
<xs:enumeration value="SL"/>
<xs:enumeration value="ZW"/>
<xs:enumeration value="SG"/>
<xs:enumeration value="SX"/>
<xs:enumeration value="SK"/>
<xs:enumeration value="SI"/>
<xs:enumeration value="SO"/>
<xs:enumeration value="ES"/>
<xs:enumeration value="LK"/>
<xs:enumeration value="SH"/>
<xs:enumeration value="KN"/>
<xs:enumeration value="LC"/>
<xs:enumeration value="PM"/>
<xs:enumeration value="VC"/>
<xs:enumeration value="ZA"/>
<xs:enumeration value="SD"/>
<xs:enumeration value="GS"/>
<xs:enumeration value="SS"/>
<xs:enumeration value="SR"/>
<xs:enumeration value="SJ"/>
<xs:enumeration value="SZ"/>
<xs:enumeration value="SY"/>
<xs:enumeration value="TJ"/>
<xs:enumeration value="TW"/>
<xs:enumeration value="TZ"/>
<xs:enumeration value="TH"/>
<xs:enumeration value="TG"/>
<xs:enumeration value="TK"/>
<xs:enumeration value="TO"/>
<xs:enumeration value="TT"/>
<xs:enumeration value="TA"/>
<xs:enumeration value="TD"/>
<xs:enumeration value="CZ"/>
<xs:enumeration value="CS"/>
<xs:enumeration value="TN"/>
<xs:enumeration value="TR"/>
<xs:enumeration value="TM"/>
<xs:enumeration value="TC"/>
<xs:enumeration value="TV"/>
<xs:enumeration value="SU"/>
<xs:enumeration value="UG"/>

```

simpleType **Currency_CL**

simpleType **DateFormat**

10.01.2021

	9 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))"/> </xs:restriction> </xs:simpleType>
--	--

simpleType **Decimal_15_2**

type	restriction of xs:decimal								
used by	elements ArticlesType/ArticleRawmaterials/nMaterialPrice nPrice nPricePro nPriceUVP								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<pre><xs:simpleType name="Decimal_15_2"> <xs:restriction base="xs:decimal"> <xs:totalDigits value="15"/> <xs:fractionDigits value="2"/> <xs:minInclusive value="0.0"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **Decimal_16_3**

type	restriction of xs:decimal								
used by	elements nAmount nMeasure nMeasureA nMeasureB nMeasureC nMinOrder nQuantity nWeight								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<pre><xs:simpleType name="Decimal_16_3"> <xs:restriction base="xs:decimal"> <xs:totalDigits value="16"/> <xs:fractionDigits value="3"/> <xs:minInclusive value="0.001"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **Decimal_18_4**

type	restriction of xs:decimal								
used by	elements nWeigthbase nWeigthrate								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>0.0001</td></tr> <tr> <td>totalDigits</td><td>18</td></tr> <tr> <td>fractionDigits</td><td>4</td></tr> </table>	Kind	Value	minInclusive	0.0001	totalDigits	18	fractionDigits	4
Kind	Value								
minInclusive	0.0001								
totalDigits	18								
fractionDigits	4								
source	<pre><xs:simpleType name="Decimal_18_4"> <xs:restriction base="xs:decimal"> <xs:totalDigits value="18"/> </xs:restriction> </xs:simpleType></pre>								

	enumeration BS enumeration EX enumeration KS enumeration CE enumeration VD enumeration SS enumeration PL
source	<pre> <xs:simpleType name="Doctype_CL_Document_Article"> <xs:restriction base="xs:string"> <xs:enumeration value="2D"/> <xs:enumeration value="2F"/> <xs:enumeration value="2S"/> <xs:enumeration value="3C"/> <xs:enumeration value="3A"/> <xs:enumeration value="DB"/> <xs:enumeration value="GG"/> <xs:enumeration value="IS"/> <xs:enumeration value="MA"/> <xs:enumeration value="PA"/> <xs:enumeration value="PP"/> <xs:enumeration value="ZL"/> <xs:enumeration value="SB"/> <xs:enumeration value="SF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TZ"/> <xs:enumeration value="VI"/> <xs:enumeration value="WA"/> <xs:enumeration value="LE"/> <xs:enumeration value="EL"/> <xs:enumeration value="UP"/> <xs:enumeration value="WL"/> <xs:enumeration value="VM"/> <xs:enumeration value="VT"/> <xs:enumeration value="EP"/> <xs:enumeration value="BS"/> <xs:enumeration value="EX"/> <xs:enumeration value="KS"/> <xs:enumeration value="CE"/> <xs:enumeration value="VD"/> <xs:enumeration value="SS"/> <xs:enumeration value="PL"/> </xs:restriction> </xs:simpleType> </pre>

simpleType **Doctype_CL_Document_Groups**

type	restriction of xs:string	
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3B
	enumeration	3A

	enumeration AN enumeration DB enumeration GG enumeration IS enumeration MA enumeration PA enumeration PP enumeration ZL enumeration SB enumeration SF enumeration PF enumeration TI enumeration TZ enumeration VI enumeration WA enumeration LE
source	<pre> <xs:simpleType name="Doctype_CL_Document_Groups"> <xs:restriction base="xs:string"> <xs:enumeration value="2D"/> <xs:enumeration value="2F"/> <xs:enumeration value="2S"/> <xs:enumeration value="3C"/> <xs:enumeration value="3B"/> <xs:enumeration value="3A"/> <xs:enumeration value="AN"/> <xs:enumeration value="DB"/> <xs:enumeration value="GG"/> <xs:enumeration value="IS"/> <xs:enumeration value="MA"/> <xs:enumeration value="PA"/> <xs:enumeration value="PP"/> <xs:enumeration value="ZL"/> <xs:enumeration value="SB"/> <xs:enumeration value="SF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TI"/> <xs:enumeration value="TZ"/> <xs:enumeration value="VI"/> <xs:enumeration value="WA"/> <xs:enumeration value="LE"/> </xs:restriction> </xs:simpleType> </pre>

simpleType Doctype_CL_Document_HP

type	restriction of xs:string	
used by	element	HistoricProductsType/HistoricProductDocs/cDocumentType
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3B
	enumeration	3A

	enumeration AN enumeration DB enumeration GG enumeration IS enumeration MA enumeration PA enumeration PP enumeration ZL enumeration SB enumeration SF enumeration PF enumeration TI enumeration TZ enumeration VI enumeration WA enumeration LE enumeration EL enumeration UP enumeration WL enumeration VP enumeration VM enumeration VT enumeration EP enumeration BS enumeration EX enumeration KS enumeration CE enumeration VD enumeration SS enumeration PL
source	<pre> <xs:simpleType name="Doctype_CL_Document_HP"> <xs:restriction base="xs:string"> <xs:enumeration value="2D"/> <xs:enumeration value="2F"/> <xs:enumeration value="2S"/> <xs:enumeration value="3C"/> <xs:enumeration value="3B"/> <xs:enumeration value="3A"/> <xs:enumeration value="AN"/> <xs:enumeration value="DB"/> <xs:enumeration value="GG"/> <xs:enumeration value="IS"/> <xs:enumeration value="MA"/> <xs:enumeration value="PA"/> <xs:enumeration value="PP"/> <xs:enumeration value="ZL"/> <xs:enumeration value="SB"/> <xs:enumeration value="SF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TI"/> <xs:enumeration value="TZ"/> <xs:enumeration value="VI"/> <xs:enumeration value="WA"/> <xs:enumeration value="LE"/> <xs:enumeration value="EL"/> <xs:enumeration value="UP"/> <xs:enumeration value="WL"/> </pre>

	<pre> <xs:enumeration value="VP"/> <xs:enumeration value="VM"/> <xs:enumeration value="VT"/> <xs:enumeration value="EP"/> <xs:enumeration value="BS"/> <xs:enumeration value="EX"/> <xs:enumeration value="KS"/> <xs:enumeration value="CE"/> <xs:enumeration value="VD"/> <xs:enumeration value="SS"/> <xs:enumeration value="PL"/> </xs:restriction> </xs:simpleType> </pre>
--	--

simpleType **Doctype_CL_Picture**

type	restriction of xs:string	
used by	element	cPictureType
facets	Kind	Value
	enumeration	B_
	enumeration	S_
	enumeration	U_
	enumeration	V_
	enumeration	MI
	enumeration	DT
	enumeration	LO
	enumeration	KB
	enumeration	BF
source	<pre> <xs:simpleType name="Doctype_CL_Picture"> <xs:restriction base="xs:string"> <xs:enumeration value="B_"/> <xs:enumeration value="S_"/> <xs:enumeration value="U_"/> <xs:enumeration value="V_"/> <xs:enumeration value="MI"/> <xs:enumeration value="DT"/> <xs:enumeration value="LO"/> <xs:enumeration value="KB"/> <xs:enumeration value="BF"/> </xs:restriction> </xs:simpleType> </pre>	

simpleType **Doctype_CL_Picture_Groups**

type	restriction of xs:string	
facets	Kind	Value
	enumeration	B_
	enumeration	S_
	enumeration	U_
	enumeration	V_
	enumeration	MI
	enumeration	DT

	enumeration LO
source	<pre> <xs:simpleType name="Doctype_CL_Picture_Groups"> <xs:restriction base="xs:string"> <xs:enumeration value="B_" /> <xs:enumeration value="S_" /> <xs:enumeration value="U_" /> <xs:enumeration value="V_" /> <xs:enumeration value="MI" /> <xs:enumeration value="DT" /> <xs:enumeration value="LO" /> </xs:restriction> </xs:simpleType> </pre>

simpleType **Erlaubte_Zeichen**

type	restriction of xs:string				
used by	simpleTypes ArticleType Artikelnummer Attributesystem CL Countries Currency CL Discontinued CL PictureUse PriceOnDemand Type Rawmaterial CL String 0 40 Type String 10 Type String 14 Type String 15 Type String 20 Type String 256 Type String 2 Type String 35 Type String 3 Type String 40 Type String 4 Type String 5 Type String 80 Type String 8 Type TaxCode CL Verpackungsart				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value				
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*				
source	<pre> <xs:simpleType name="Erlaubte_Zeichen"> <xs:restriction base="xs:string"> <xs:pattern value="([&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*"/> </xs:restriction> </xs:simpleType> </pre>				

simpleType **Erlaubte_Zeichen_Extended**

type	restriction of xs:string				
used by	simpleTypes String 10000 Extended Type String 256 Extended Type String 512 Extended Type String 60 Extended Type				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x230F;][&#x000A;-&#x000D;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⌏][
-][∀-⋿])*
Kind	Value				
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⌏][
-][∀-⋿])*				
source	<pre> <xs:simpleType name="Erlaubte_Zeichen_Extended"> <xs:restriction base="xs:string"> <xs:pattern value="([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x230F;][&#x000A;-&#x000D;][&#x2200;-&#x22FF;])*"/> </xs:restriction> </xs:simpleType> </pre>				

simpleType **Int_10_Trennzeichen**

type	restriction of xs:integer						
used by	element nDocOrder						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>9999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	9999999999
Kind	Value						
minInclusive	1						
maxInclusive	9999999999						
source	<pre><xs:simpleType name="Int_10_Trennzeichen"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="9999999999"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **Int_1_99_Type**

type	restriction of xs:integer						
used by	element nShelfLife						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99
Kind	Value						
minInclusive	1						
maxInclusive	99						
source	<pre><xs:simpleType name="Int_1_99_Type"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **Int_2_Trennzeichen**

type	restriction of xs:integer						
used by	element nTextRow						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99
Kind	Value						
minInclusive	1						
maxInclusive	99						
source	<pre><xs:simpleType name="Int_2_Trennzeichen"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **Int_3_Type**

type	restriction of xs:integer				
used by	element nRow				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>([0-9]{1,3})</td></tr> </table>	Kind	Value	pattern	([0-9]{1,3})
Kind	Value				
pattern	([0-9]{1,3})				

simpleType **Int_8_Trennzeichen**

simpleType **Int_9_Trennzeichen**

simpleType **PictureUse**

Seite 105 von 116

	<pre> <xs:enumeration value="SN"/> </xs:restriction> </xs:simpleType> </pre>
--	--

simpleType **String_0_40_Type**

type	restriction of Erlaubte Zeichen								
used by	elements sDimensiontext LongtextType/Longtexts/sText								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß B)*</td></tr> </table>	Kind	Value	minLength	0	maxLength	40	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß B)*
Kind	Value								
minLength	0								
maxLength	40								
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß B)*								
source	<pre> <xs:simpleType name="String_0_40_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="0"/> <xs:maxLength value="40"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_10000_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	elements sDescriptionLong sDescriptionMarketing								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10000</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;] &#x00A0;-&#x00FF;] &#x0100;-&#x017F;] &#x0370;-&#x03FF;] &#x0400;-&#x04FF;] &#x20A0;-&#x20CF;] &#x2000;-&#x206F;] &#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10000	pattern	([-~] -ÿ] Ā-ſ] Ͱ-Ͽ] Ѐ-ӿ] ₠-⃏]  -⁯] ⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	10000								
pattern	([-~] -ÿ] Ā-ſ] Ͱ-Ͽ] Ѐ-ӿ] ₠-⃏]  -⁯] ⌀
  ∀-⋿])*								
source	<pre> <xs:simpleType name="String_10000_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="10000"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_10_Type**

type	restriction of Erlaubte Zeichen								
used by	elements sPosition sProductgroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß B)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß B)*
Kind	Value								
minLength	1								
maxLength	10								
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß B)*								
source	<pre> <xs:simpleType name="String_10_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_14_Type**

```
simpleType String_15_Type
```

simpleType **String** 20 Type

Seite 108 von 116

	<pre> <xs:maxLength value="20"/> </xs:restriction> </xs:simpleType> </pre>
--	--

simpleType **String_256_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	elements sAttributevalue sDescriptionShort								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x000A;-&#x000D;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	256	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	256								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*								
source	<pre> <xs:simpleType name="String_256_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="256"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_256_Type**

type	restriction of Erlaubte Zeichen								
used by	element sUrl								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	256	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	256								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_256_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="256"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_2_Type**

type	restriction of Erlaubte Zeichen								
used by	element sSupplierSynonym								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>2</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	2	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	2								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_2_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_35_Type**

```
simpleType String_3_Type
```

simpleType **String_40_Type**

Seite 110 von 116

	<pre><xs:maxLength value="40"/> </xs:restriction> </xs:simpleType></pre>
--	--

simpleType **String_4_Type**

type	restriction of Erlaubte Zeichen								
used by	element sDiscountgroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>4</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	4	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	4								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß)*								
source	<pre><xs:simpleType name="String_4_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **String_512_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	element sUsageNode								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>512</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;] &#x00A0;-&#x00FF;] &#x0100;-&#x017F;] &#x0370;-&#x03FF;] &#x0400;-&#x04FF;] &#x20A0;-&#x20CF;] &#x2000;-&#x206F;] &#x2300;-&#x2300A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	512	pattern	([-~] -ÿ] Ā-ſ] Ͱ-Ͽ] Ѐ-ӿ] ₠-⃏]  -⁯] ⌀-𣀊  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	512								
pattern	([-~] -ÿ] Ā-ſ] Ͱ-Ͽ] Ѐ-ӿ] ₠-⃏]  -⁯] ⌀-𣀊  ∀-⋿])*								
source	<pre><xs:simpleType name="String_512_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="512"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **String_5_Type**

type	restriction of Erlaubte Zeichen								
used by	element sPricegroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>5</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	5	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	5								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß)*								
source	<pre><xs:simpleType name="String_5_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType></pre>								

	<pre> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType **String_60_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	elements cAttributeunit sAttributeclass sAttributedescription sAttributename sAttributevalue2								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>60</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x000A;-&#x000D;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	60	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	60								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*								
source	<pre> <xs:simpleType name="String_60_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="60"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_80_Type**

type	restriction of Erlaubte Zeichen								
used by	elements HeaderType/sPackagingDisposalProvider sSerie								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>80</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; &#x28; &#x29; &#x2A; &#x2B; &#x2C; &#x2D; &#x2E; &#x2F; &#x30; &#x31; &#x32; &#x33; &#x34; &#x35; &#x36; &#x37; &#x38; &#x39; &#x40; &#x41; &#x42; &#x43; &#x44; &#x45; &#x46; &#x47; &#x48; &#x49; &#x4A; &#x4B; &#x4C; &#x4D; &#x4E; &#x4F; &#x50; &#x51; &#x52; &#x53; &#x54; &#x55; &#x56; &#x57; &#x58; &#x59; &#x5A; &#x5B; &#x5C; &#x5D; &#x5E; &#x5F; &#x60; &#x61; &#x62; &#x63; &#x64; &#x65; &#x66; &#x67; &#x68; &#x69; &#x6A; &#x6B; &#x6C; &#x6D; &#x6E; &#x6F; &#x70; &#x71; &#x72; &#x73; &#x74; &#x75; &#x76; &#x77; &#x78; &#x79; &#x7A; &#x7B; &#x7C; &#x7D; &#x7E; &#x7F; &#x80; &#x81; &#x82; &#x83; &#x84; &#x85; &#x86; &#x87; &#x88; &#x89; &#x8A; &#x8B; &#x8C; &#x8D; &#x8E; &#x8F; &#x90; &#x91; &#x92; &#x93; &#x94; &#x95; &#x96; &#x97; &#x98; &#x99; &#x9A; &#x9B; &#x9C; &#x9D; &#x9E; &#x9F; &#xA0; &#xA1; &#xA2; &#xA3; &#xA4; &#xA5; &#xA6; &#xA7; &#xA8; &#xA9; &#xAA; &#xAB; &#xAC; &#xAD; &#xAE; &#xAF; &#xB0; &#xB1; &#xB2; &#xB3; &#xB4; &#xB5; &#xB6; &#xB7; &#xB8; &#xB9; &#xBA; &#xBB; &#xBC; &#xBD; &#xBE; &#xBF; &#xC0; &#xC1; &#xC2; &#xC3; &#xC4; &#xC5; &#xC6; &#xC7; &#xC8; &#xC9; &#xCA; &#xCB; &#xCC; &#xCD; &#xCE; &#xCF; &#xD0; &#xD1; &#xD2; &#xD3; &#xD4; &#xD5; &#xD6; &#xD7; &#xD8; &#xD9; &#xDA; &#xDB; &#xDC; &#xDD; &#xDE; &#xDF; &#xE0; &#xE1; &#xE2; &#xE3; &#xE4; &#xE5; &#xE6; &#xE7; &#xE8; &#xE9; &#xEA; &#xEB; &#xEC; &#xED; &#xEE; &#xEF; &#xF0; &#xF1; &#xF2; &#xF3; &#xF4; &#xF5; &#xF6; &#xF7; &#xF8; &#xF9; &#xFA; &#xFB; &#xFC; &#xFD; &#xFE; &#xFF;)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	80	pattern	(! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*
Kind	Value								
minLength	1								
maxLength	80								
pattern	(! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*								
source	<pre> <xs:simpleType name="String_80_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="80"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_8_Type**

type	restriction of Erlaubte Zeichen								
used by	element sLongtext								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>8</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; &#x28; &#x29; &#x2A; &#x2B; &#x2C; &#x2D; &#x2E; &#x2F; &#x30; &#x31; &#x32; &#x33; &#x34; &#x35; &#x36; &#x37; &#x38; &#x39; &#x40; &#x41; &#x42; &#x43; &#x44; &#x45; &#x46; &#x47; &#x48; &#x49; &#x4A; &#x4B; &#x4C; &#x4D; &#x4E; &#x4F; &#x50; &#x51; &#x52; &#x53; &#x54; &#x55; &#x56; &#x57; &#x58; &#x59; &#x5A; &#x5B; &#x5C; &#x5D; &#x5E; &#x5F; &#x60; &#x61; &#x62; &#x63; &#x64; &#x65; &#x66; &#x67; &#x68; &#x69; &#x6A; &#x6B; &#x6C; &#x6D; &#x6E; &#x6F; &#x70; &#x71; &#x72; &#x73; &#x74; &#x75; &#x76; &#x77; &#x78; &#x79; &#x7A; &#x7B; &#x7C; &#x7D; &#x7E; &#x7F; &#x80; &#x81; &#x82; &#x83; &#x84; &#x85; &#x86; &#x87; &#x88; &#x89; &#x8A; &#x8B; &#x8C; &#x8D; &#x8E; &#x8F; &#x90; &#x91; &#x92; &#x93; &#x94; &#x95; &#x96; &#x97; &#x98; &#x99; &#x9A; &#x9B; &#x9C; &#x9D; &#x9E; &#x9F; &#xA0; &#xA1; &#xA2; &#xA3; &#xA4; &#xA5; &#xA6; &#xA7; &#xA8; &#xA9; &#xAA; &#xAB; &#xAC; &#xAD; &#xAE; &#xAF; &#xB0; &#xB1; &#xB2; &#xB3; &#xB4; &#xB5; &#xB6; &#xB7; &#xB8; &#xB9; &#xBA; &#xBB; &#xBC; &#xBD; &#xBE; &#xBF; &#xC0; &#xC1; &#xC2; &#xC3; &#xC4; &#xC5; &#xC6; &#xC7; &#xC8; &#xC9; &#xCA; &#xCB; &#xCC; &#xCD; &#xCE; &#xCF; &#xD0; &#xD1; &#xD2; &#xD3; &#xD4; &#xD5; &#xD6; &#xD7; &#xD8; &#xD9; &#xDA; &#xDB; &#xDC; &#xDD; &#xDE; &#xDF; &#xE0; &#xE1; &#xE2; &#xE3; &#xE4; &#xE5; &#xE6; &#xE7; &#xE8; &#xE9; &#xEA; &#xEB; &#xEC; &#xED; &#xEE; &#xEF; &#xF0; &#xF1; &#xF2; &#xF3; &#xF4; &#xF5; &#xF6; &#xF7; &#xF8; &#xF9; &#xFA; &#xFB; &#xFC; &#xFD; &#xFE; &#xFF;)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	8	pattern	(! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*
Kind	Value								
minLength	1								
maxLength	8								
pattern	(! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*								
source	<pre> <xs:simpleType name="String_8_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> </xs:restriction> </xs:simpleType> </pre>								

	<pre> <xs:maxLength value="8"/> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType **Supplier_ID**

type	restriction of xs:string								
used by	element sSupplierID								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>13</td></tr> <tr> <td>pattern</td><td>([0-9])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	13	pattern	([0-9])*
Kind	Value								
minLength	1								
maxLength	13								
pattern	([0-9])*								
source	<pre> <xs:simpleType name="Supplier_ID"> <xs:restriction base="xs:string"> <xs:minLength value="1"/> <xs:maxLength value="13"/> <xs:pattern value="([0-9])+"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **TaxCode_CL**

type	restriction of Erlaubte Zeichen												
used by	element cTaxCode												
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> <tr> <td>enumeration</td><td>0</td></tr> <tr> <td>enumeration</td><td>1</td></tr> <tr> <td>enumeration</td><td>7</td></tr> <tr> <td>enumeration</td><td>8</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*	enumeration	0	enumeration	1	enumeration	7	enumeration	8
Kind	Value												
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*												
enumeration	0												
enumeration	1												
enumeration	7												
enumeration	8												
source	<pre> <xs:simpleType name="TaxCode_CL"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="0"/> <xs:enumeration value="1"/> <xs:enumeration value="7"/> <xs:enumeration value="8"/> </xs:restriction> </xs:simpleType> </pre>												

simpleType **Teststring_Type**

type	restriction of xs:string				
used by	element sTeststring				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>enumeration</td><td>1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄß®€</td></tr> </table>	Kind	Value	enumeration	1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄß®€
Kind	Value				
enumeration	1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄß®€				
source	<pre> <xs:simpleType name="Teststring_Type"> <xs:restriction base="xs:string"> </pre>				

	<pre> <xs:enumeration value="1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄÜß®€"/> </xs:restriction> </xs:simpleType> </pre>
--	--

simpleType **Unit_CL**

type	restriction of xs:string																																				
used by	elements cMinOrderUnit cPriceunit cPriceunitPro cPriceunitUVP cUnit cWeightbaseUnit cWeightrateUnit																																				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr><td>enumeration</td><td>DZN</td></tr> <tr><td>enumeration</td><td>GRM</td></tr> <tr><td>enumeration</td><td>HLT</td></tr> <tr><td>enumeration</td><td>KGM</td></tr> <tr><td>enumeration</td><td>KTM</td></tr> <tr><td>enumeration</td><td>MTQ</td></tr> <tr><td>enumeration</td><td>CMQ</td></tr> <tr><td>enumeration</td><td>LTR</td></tr> <tr><td>enumeration</td><td>MTR</td></tr> <tr><td>enumeration</td><td>MMT</td></tr> <tr><td>enumeration</td><td>PR</td></tr> <tr><td>enumeration</td><td>MTK</td></tr> <tr><td>enumeration</td><td>CMK</td></tr> <tr><td>enumeration</td><td>SET</td></tr> <tr><td>enumeration</td><td>PCE</td></tr> <tr><td>enumeration</td><td>TNE</td></tr> <tr><td>enumeration</td><td>CMT</td></tr> </table>	Kind	Value	enumeration	DZN	enumeration	GRM	enumeration	HLT	enumeration	KGM	enumeration	KTM	enumeration	MTQ	enumeration	CMQ	enumeration	LTR	enumeration	MTR	enumeration	MMT	enumeration	PR	enumeration	MTK	enumeration	CMK	enumeration	SET	enumeration	PCE	enumeration	TNE	enumeration	CMT
Kind	Value																																				
enumeration	DZN																																				
enumeration	GRM																																				
enumeration	HLT																																				
enumeration	KGM																																				
enumeration	KTM																																				
enumeration	MTQ																																				
enumeration	CMQ																																				
enumeration	LTR																																				
enumeration	MTR																																				
enumeration	MMT																																				
enumeration	PR																																				
enumeration	MTK																																				
enumeration	CMK																																				
enumeration	SET																																				
enumeration	PCE																																				
enumeration	TNE																																				
enumeration	CMT																																				
source	<pre> <xs:simpleType name="Unit_CL"> <xs:restriction base="xs:string"> <xs:enumeration value="DZN"/> <xs:enumeration value="GRM"/> <xs:enumeration value="HLT"/> <xs:enumeration value="KGM"/> <xs:enumeration value="KTM"/> <xs:enumeration value="MTQ"/> <xs:enumeration value="CMQ"/> <xs:enumeration value="LTR"/> <xs:enumeration value="MTR"/> <xs:enumeration value="MMT"/> <xs:enumeration value="PR"/> <xs:enumeration value="MTK"/> <xs:enumeration value="CMK"/> <xs:enumeration value="SET"/> <xs:enumeration value="PCE"/> <xs:enumeration value="TNE"/> <xs:enumeration value="CMT"/> </xs:restriction> </xs:simpleType> </pre>																																				

simpleType **Verpackungsart**

type	restriction of Erlaubte Zeichen
used by	element cPackageKind

facets	Kind	Value
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä ö Ö ß)*
	enumeration	BB
	enumeration	BG
	enumeration	BH
	enumeration	BK
	enumeration	CF
	enumeration	CG
	enumeration	CH
	enumeration	CI
	enumeration	CT
	enumeration	PA
	enumeration	PC
	enumeration	PG
	enumeration	PK
	enumeration	PN
	enumeration	PU
	enumeration	RG
	enumeration	SC
	enumeration	HP
	enumeration	TU
	enumeration	BTL
	enumeration	BX
	enumeration	CO
	enumeration	DY
	enumeration	STG
	enumeration	TRO
	enumeration	PLA
	enumeration	KAN
	enumeration	GEB
	enumeration	PMS
source	<pre><xs:simpleType name="Verpackungsart"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="BB"/> <xs:enumeration value="BG"/> <xs:enumeration value="BH"/> <xs:enumeration value="BK"/> <xs:enumeration value="CF"/> <xs:enumeration value="CG"/> <xs:enumeration value="CH"/> <xs:enumeration value="CI"/> <xs:enumeration value="CT"/> <xs:enumeration value="PA"/> <xs:enumeration value="PC"/> <xs:enumeration value="PG"/> <xs:enumeration value="PK"/> <xs:enumeration value="PN"/> <xs:enumeration value="PU"/> <xs:enumeration value="RG"/> <xs:enumeration value="SC"/> <xs:enumeration value="HP"/> <xs:enumeration value="TU"/> <xs:enumeration value="BTL"/> <xs:enumeration value="BX"/> <xs:enumeration value="CO"/> <xs:enumeration value="DY"/></pre>	

	<pre><xs:enumeration value="STG"/> <xs:enumeration value="TRO"/> <xs:enumeration value="PLA"/> <xs:enumeration value="KAN"/> <xs:enumeration value="GEB"/> <xs:enumeration value="PMS"/> </xs:restriction> </xs:simpleType></pre>
--	---