

Schnittstelle XML
ARGE Stammdaten
Import gesamt



Version 7.0

Stand: 10.01.2021

Grünebaumstr. 4
33098 Paderborn
Telefon +49 5251 87288-0
Fax +49 5251 87288-19
E-Mail: info@arge.de

Versionshistory

Version 1.0 vom 02.07.2015

Initiale Version erstellt

Version 1.1 vom 20.04.2016

Struktur	Version 1.0		Version 1.1	
element bBulkGood	used by:	ComplexType, Articles	used by:	entfällt
element cArticletype			facets:	neu: STG
element cCurrencyNet				entfällt
element cPriceunitNet				entfällt
element nPricebaseNet				entfällt
element nPriceNet				entfällt
element cQuantityUnit	used by:	ArticlesTypes, ArticleSets, PackageUnit Type	used by:	entfällt
element nMinOrder	type:	Long 15 Trennzeichen	type: facets:	Decimal_16_3 angepasst
element nQuantity	type:	Int 15 Trennzeichen	type: facets:	Decimal_16_3 angepasst
element sArticleNumberPrint	type:	String 15 Type	type:	String 35 Type
element slIntrastatnumber				entfällt
element sSupplier				entfällt
element ArticlesType/ArticleAccessories/bAccessoryUse			neu	neu
element ArticlesType/ArticleAccessories/nAmount			neu	neu
element ArticlesType/ArticleDocuments/cDocumentType			facets:	neu: LE, EL
element HeaderType/HeaderDocuments				entfällt
element HeaderType/HeaderDocuments/cDocumentType				entfällt
element HeaderType/HeaderDocuments/cPictureType				entfällt
simpleType Artikellinktype				entfällt
simpleType Decimal_15_4				entfällt
simpleType Doctype_CL_Document_Header				entfällt
simpleType Doctype_CL_Document_HP			facets:	neu: LE, EL
simpleType Doctype_CL_Picture_Header				entfällt

simpleType Informationscodes				entfällt
simpleType Int_15_Trennzeichen				entfällt
simpleType Long_15_Trennzeichen				entfällt
simpleType String_1000_Type				entfällt
simpleType String_100_Type				entfällt
simpleType String_9_Type				entfällt

Version 1.2 vom 07.02.2017

Struktur	Version 1.1		Version 1.2	
element sSupplierID	type:	Int 10 Trennzeichen	type:	Int 13 Trennzeichen
element bUBAListRelevant	-	-	used by:	ArticlesType
element bUBAListConform	-	-	used by:	ArticlesType
element sSerie	-	-	used by:	ArticlesType
element sModelNumber	-	-	used by:	ArticlesType
element sDescriptionShort	-	-	used by:	ArticlesType
element sDescriptionLong	-	-	used by:	ArticlesType
element sDescriptionMarketing	-	-	used by:	ArticlesType
element sUsageNode	-	-	used by:	ArticlesType
element sUrl	type	200	type	256
element cAttributesystem	-	-	used by:	ArticleAttribut
element sAttributeclass	-	-	used by:	ArticleAttribut
element sAttributedescription	-	-	used by:	ArticleAttribut
simpleType Erlaubte_Zeichen_Extended	-	-	neu	
simpleType String_80_Type	-	-	neu	
simpleType String_256_Type	-	-	neu	
simpleType String_256_Extended_Type	-	-	neu	
simpleType String_512_Extended_Type	-	-	neu	
simpleType String_10000_Extended_Type	-	-	neu	
simpleType Int_13_Trennzeichen	-	-	neu	
simpleType Doctype_CL_Document_Article	-	-	neu	facets: UP, WL
simpleType Doctype_CL_Document_HP	-	-	neu	facets: UP, WL

simpleType Verpackungsart	-	-	neu	facets: PLA, KAN, GEB
simpleType Attributesystem_CL	-	-	neu	facets: INDIV, ETIM 6, ETIM 7, ERP 1.15, ERP 2.0, ERP 2.3

Version 4.0 vom 19.04.2018

Struktur	Version 1.2		Version 4.0	
element slInventory	type:	String 35 Type		entfällt
element Checknumber	type:	String 35 Type		entfällt
element REACH_date	-	-	neu	ArticlesType
element REACH_Info	-	-	neu	ArticlesType
simpleType REACH_CL	-	-	neu	facets: true, false, no data
simpleType Rawmaterial_CL	-	-	neu	facets: MS
simpleType Countries	-	-	neu	facets: CE, EU, QU
simpleType Verpackungsart	-	-	entfällt	facets: KAN
simpleType Verpackungsart	-	-	neu	facets: CI, RG

Version 5.0 vom 10.07.2019

Struktur	Version 4.0		Version 5.0	
simple Type Attributesystem_CL	-	-	neu	facets: ZVSHK
simple Type Doctype_CL_Document_Article	-	-	neu	facets: VP, VM, VT, EP, BS, EX, AS, KS, CE, VD, SS
simple Type Doctype_CL_Document_HP	-	-	neu	facets: VP, VM, VT, EP, BS, EX, AS, KS, CE, VD, SS
element sAttributeclass	type:	String 35	type:	String 60 facets: angepasst
element sAttributename	type:	String 35	type:	String 60 facets: angepasst
element sAttributevalue	type:	String 35	type:	String 60 facets: angepasst
element sAttributevalue2	type:	String 35	type:	String 60 facets: angepasst
element sAttributeunit	type:	String 35	type:	String 60 facets: angepasst
element sAttributedescription	type:	String 35	type:	String 60 facets: angepasst
element sDescriptionShort	type:	minOccurs = 0	type:	minOccurs = 1 ref: angepasst
element bDeleted	-	-	neu used:	ArticlesType

Version 5.1 vom 17.07.2019

Struktur	Version 5.0		Version 5.1	
element bSystemRelevantPackaging	-	-	neu used:	HeaderType
element LUCID_RegistrationNumber	-	-	neu used:	HeaderType
Element sDisposalServiceAgent	-	-	neu used:	HeaderType
element WEEERelevant	-	-	neu used:	HeaderType
element WEEE_RegistrationNumber	-	-	neu used:	HeaderType

Version 5.2 vom 19.12.2019

Struktur	Version 5.1		Version 5.2	
element cDocumentType	-	-	neu	Facets: PL
element HistoricProductsType/HistoricProductDocs/cDocumentType	-	-	neu	Facets: PL
element cAttributesystem	-	-	neu	facets: Batteriekennzeichnung
simple Type Attributesystem_CL	-	-	neu	facets: Batteriekennzeichnung
simple Type Doctype_CL_Document_Article	-	-	neu	facets: PL
simple Type Doctype_CL_Document_HP	-	-	neu	facets: PL

Version 6.0 vom 15.04.2020

Struktur	Version 5.2		Version 6.0	
element name sDocDescription	type:	String 35	type:	String 40
element name sWEENumber	-	-	type:	String 20 minOccurs = 0
element name bHazardousGood	-	-	type:	boolean
element name sSubstanceName	-	-	type:	String 20 minOccurs = 0
element name sAdditionalInformation	-	-	type:	String 20 minOccurs = 0
element name bLithiumBatteries	-	-	type:	boolean
ArticleAttributeID field xpath cAttributesystem	-	-	neu	
ArticleAttributeID field xpath sAttributevalue	-	-	neu	
element bIncludesWEEERelevantArticles	used:	HeaderType	entfällt	
element sWEENumber	used:	HeaderType	entfällt	
element name ArticleAccessories element bAccessoryUse			entfällt	
common_type	-	-	neu	࢘-FF
element cPictureType	-	-	neu	facets: KB, BF
simpleType Doctype_CL_Picture	-	-	neu	facets: KB, BF
element cDocumentType		facets: 3B,VP,TI,AN	ent- fallen	-
element HistoricProductsType/HistoricProductDocs/ cDocumentType		facets: 3B,VP,TI,AN	ent- fallen	
simpleType Doctype_CL_Document_Article		facets: 3B,VP,TI,AN	ent- fallen	
simpleType Doctype_CL_Document_HP		facets: 3B,VP,TI,AN	ent- fallen	
element cPackageKind	-	-	neu	facets:HP
simpleType EEC_CL			entfällt	
element cAttributesystem			neu	Facets: ETIM 8, ERP, ERP 2.5, Gefahrstoff
simpleType Attributesystem_CL	-	-	neu	Facets: ETIM 8, ERP, ERP 2.5, Gefahrstoff

Version 7.0 vom 10.01.2021

Struktur	Version 6.0		Version 7.0	
element name bDangerGood			entfällt	
element name bHazardousGood			entfällt	
element name bLithiumBatteries			entfällt	
element name bUBAListConform			entfällt	
element name bUBAListRelevant			entfällt	
element name REACH_date			entfällt	
element name REACH_Info			entfällt	
element name sWEENumber			entfällt	
element name sUNNumber			entfällt	
element name sDangerClass			entfällt	
element name sCustomsTariffNumber			entfällt	
element name sSubstanceName			entfällt	
element name sAdditionalInformation			entfällt	
element ArticlesType/PriceLine			neu	
element PriceLine	-	-	neu	
simpleType String_14_Type	-	-	neu	-
simpleType TestString_Type	-	-	neu	
simpleType DocType_CL_Document_Groups		facets: AS, LS, KV	entfallen	
simpleType sTestString	-	-	neu	

element cAttributesystem			neu	facets: Regulations, Gebühren
Attributnamen in Attributsystem Verordnungen (Regulations) (siehe Codelisten)			neu	facets: UN-Nummer, Gefahrenklasse, Beförderungskategorie, Offizielle Benennung, Technische Benennung, Gefahrenzettel, Verpackungsgruppe, Anzahl der Versandstücke, Beschreibung der Versandstücke, Tunnelbeschränkungsc ode
Attributsystem Verordnungen (Regulations) (siehe Codelisten)			neu	facets: ERP, ERP 1.15, ERP 2.0, ERP 2.1, ERP 2.3, ERP 2.5, UBA-Positivliste, Gefahrgut, REACH, ECHA-DB, Entsorgung, Batteriekennzeichnung
cAttributesystem			entfallen	ETIM 6, ERP, ERP 1.15, ERP 2.0, ERP 2.3, ERP 2.5, Batteriekennzeichnung, Gefahrstoff
complexType ArticlesType		neu: PLA, GEB	neu	
complexType PackageUnitType		neu: PMS	neu	

Schema **arge_david.xsd**schema location: [arge_david.xsd](#)

Elements

[bCapableOfOrdering](#)
[bDeleted](#)
[bExportabel](#)
[bSubstitute](#)
[cArticleType](#)
[cAttributesystem](#)
[cAttributeunit](#)
[cCountryOfOrigin](#)
[cCurrency](#)
[cCurrencyPro](#)
[cCurrencyUVP](#)
[cDiscontinued](#)
[cDisplayIn](#)
[cDocumentType](#)
[cMaterial](#)
[cMeasuredeclaration](#)
[cMinOrderUnit](#)
[cPackageKind](#)
[cPictureType](#)
[cPictureUse](#)
[cPriceunit](#)
[cPriceunitPro](#)
[cPriceunitUVP](#)
[cTaxCode](#)
[cUnit](#)
[cUnitA](#)
[cUnitB](#)
[cUnitC](#)
[cUnitweight](#)
[cWeightbaseUnit](#)
[cWeightrateUnit](#)
[dConstructionFrom](#)
[dConstructionTo](#)
[dDiscontinuedStart](#)
[dValidityBegin](#)
[dValidityEnd](#)
[nAmount](#)
[nDeliveryTime](#)

Complex types

[ArticlesType](#)
[BonusgroupsType](#)
[DiscountgroupsType](#)
[HeaderType](#)
[HistoricProductsType](#)
[LongtextType](#)
[PackageUnitType](#)
[ProductgroupsType](#)
[SHK StammdatenType](#)
[SparepartlistsType](#)
[WaregroupsType](#)

[nDocOrder](#)
[nMeasure](#)
[nMeasureA](#)
[nMeasureB](#)
[nMeasureC](#)
[nMinOrder](#)
[nPackageAmount](#)
[nPrice](#)
[nPricebase](#)
[nPricebasePro](#)
[nPricebaseUVP](#)
[nPricePro](#)
[nPriceUVP](#)
[nQuantity](#)
[nRow](#)
[nShelfLife](#)
[nTextRow](#)
[nWeight](#)
[nWeigthbase](#)
[nWeigthrate](#)
[PriceOnDemand](#)
[sAccessory](#)
[sAlternate](#)
[sArticle](#)
[sArticleNumberPrint](#)
[sAssignedArticle](#)
[sAttributeclass](#)
[sAttributedescription](#)
[sAttributename](#)
[sAttributevalue](#)
[sAttributevalue2](#)
[sBonusgroup](#)
[sCatalogDesc](#)
[sCatalogID](#)
[sConstructiontext](#)
[sDescription](#)
[sDescriptionLong](#)
[sDescriptionMarketing](#)
[sDescriptionShort](#)
[sDimensiontext](#)
[sDiscountgroup](#)
[sDocDescription](#)
[sDocument](#)
[sEan](#)
[sExplodedView](#)
[sHistoricProduct](#)

SHK Stammdaten[sList](#)[sLongtext](#)[sMessageName](#)[sMixedpallet](#)[sMixedpallette](#)[sModelNumber](#)[sPosition](#)[sPricegroup](#)[sProductgroup](#)[sSerie](#)[sShorttext1](#)[sShorttext2](#)[sSparepart](#)[sSparepartlist](#)[sSuccessor 1](#)[sSuccessor 2](#)[sSuccessor 3](#)[sSupplierID](#)[sSupplierShortName](#)[sSupplierSynonym](#)[sTeststring](#)[sText](#)[sUrl](#)[sUsageNode](#)[sWaregroup](#)[sWaregroupNumber](#)schema location: [common_types.xsd](#)

Complex types

[GroupDocumentType](#)

Simple types


[Articletype](#)[Artikelnummer](#)[Attributesystem CL](#)[Countries](#)[Currency CL](#)[DateFormat](#)[Decimal 15 2](#)[Decimal 16 3](#)[Decimal 18 4](#)[Discontinued CL](#)[Display CL](#)[Doctype CL Document Article](#)

[Doctype CL Document Groups](#)
[Doctype CL Document HP](#)
[Doctype CL Picture](#)
[Doctype CL Picture Groups](#)
[Erlaubte Zeichen](#)
[Erlaubte Zeichen Extended](#)
[Int 10 Trennzeichen](#)
[Int 1 99 Type](#)
[Int 2 Trennzeichen](#)
[Int 3 Type](#)
[Int 8 Trennzeichen](#)
[Int 9 Trennzeichen](#)
[LengthUnit CL](#)
[Measuredeclaration CL](#)
[PictureUse](#)
[PriceOnDemand Type](#)
[Rawmaterial CL](#)
[String 0 40 Type](#)
[String 10000 Extended Type](#)
[String 10 Type](#)
[String 14 Type](#)
[String 15 Type](#)
[String 20 Type](#)
[String 256 Extended Type](#)
[String 256 Type](#)
[String 2 Type](#)
[String 35 Type](#)
[String 3 Type](#)
[String 40 Type](#)
[String 4 Type](#)
[String 512 Extended Type](#)
[String 5 Type](#)
[String 60 Extended Type](#)
[String 80 Type](#)
[String 8 Type](#)
[Supplier ID](#)
[TaxCode CL](#)
[Teststring Type](#)
[Unit CL](#)
[Verpackungsart](#)
[WeightUnit CL](#)

element **bCapableOfOrdering**

diagram	
type	xs:boolean
used by	complexType ArticlesType
source	<code><xs:element name="bCapableOfOrdering" type="xs:boolean"/></code>


element **bDeleted**

diagram	
type	xs:boolean
used by	complexType ArticlesType
source	<code><xs:element name="bDeleted" type="xs:boolean"/></code>

element **bExportabel**

diagram	
type	xs:boolean
used by	complexType ArticlesType
source	<code><xs:element name="bExportabel" type="xs:boolean"/></code>

element **bSubstitute**

diagram	
type	xs:boolean
used by	elements ArticlesType/ArticlePictures HistoricProductsType/HistoricProductPics
source	<code><xs:element name="bSubstitute" type="xs:boolean"/></code>

element **cArticletype**

diagram					
type	Articletype				
used by	complexType ArticlesType				
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-
Kind	Value				
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-				

	9]] < = > \?@ [A-Z]]\^ _ [a-z] ü ä ö ö ß)* enumeration STD enumeration ERA enumeration ERB enumeration ERC enumeration VA enumeration MA enumeration DLS enumeration PAK enumeration SON enumeration KAL enumeration STG enumeration PLA enumeration GEB
source	<code><xs:element name="cArticletype" type="Articletype"/></code>

element **cAttributesystem**

diagram																			
type	Attributesystem CL																		
used by	element ArticlesType/ArticleAttribute																		
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]] &#x3C; = > \?&#x40; [A-Z]]\^ _ [a-z] ü ä ö ö ß)*</td></tr> <tr> <td>enumeration</td><td>INDIV</td></tr> <tr> <td>enumeration</td><td>ETIM 6</td></tr> <tr> <td>enumeration</td><td>ETIM 7</td></tr> <tr> <td>enumeration</td><td>ETIM 8</td></tr> <tr> <td>enumeration</td><td>ZVSHK</td></tr> <tr> <td>enumeration</td><td>Gebühren</td></tr> <tr> <td>enumeration</td><td>Regulations</td></tr> </table>	Kind	Value	pattern	(! " # $ & ' \\(\\ * \\+ , - \\. / [0-9]] < = > \?@ [A-Z]]\^ _ [a-z] ü ä ö ö ß)*	enumeration	INDIV	enumeration	ETIM 6	enumeration	ETIM 7	enumeration	ETIM 8	enumeration	ZVSHK	enumeration	Gebühren	enumeration	Regulations
Kind	Value																		
pattern	(! " # $ & ' \\(\\ * \\+ , - \\. / [0-9]] < = > \?@ [A-Z]]\^ _ [a-z] ü ä ö ö ß)*																		
enumeration	INDIV																		
enumeration	ETIM 6																		
enumeration	ETIM 7																		
enumeration	ETIM 8																		
enumeration	ZVSHK																		
enumeration	Gebühren																		
enumeration	Regulations																		
source	<code><xs:element name="cAttributesystem" type="Attributesystem_CL"/></code>																		

element **cAttributeunit**

diagram									
type	String_60_Extended_Type								
used by	element ArticlesType/ArticleAttribute								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>60</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	60	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	60								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*								
source	<code><xs:element name="cAttributeunit" type="String_60_Extended_Type"/></code>								

diagram	
type	Countries
used by	complexType ArticlesType
facets	Kind Value pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27;\\(\\ * \\+ _ &#x2D;\\.\\/ [0-9] . &#x3C; = > \\? &#x40; [A-Z]\\^ _\'[a-z] ü û ä ö ø § ß)* enumeration AF enumeration EG enumeration AX enumeration AL enumeration DZ enumeration AS enumeration VI enumeration AD enumeration AO enumeration AI enumeration AQ enumeration AG enumeration GQ enumeration AR enumeration AM enumeration AW enumeration AC enumeration AZ enumeration ET enumeration AU enumeration BS enumeration BH enumeration BD enumeration BB enumeration BY enumeration BE enumeration BZ enumeration BJ enumeration BM enumeration BT enumeration BO enumeration BQ enumeration BA enumeration BW enumeration BV enumeration BR enumeration VG enumeration IO enumeration BN enumeration BG enumeration BF enumeration BU enumeration BI enumeration EA enumeration CL enumeration CN enumeration CP enumeration CK enumeration CR

enumeration	CI
enumeration	CW
enumeration	DK
enumeration	DE
enumeration	DG
enumeration	DM
enumeration	DO
enumeration	DJ
enumeration	EC
enumeration	SV
enumeration	ER
enumeration	EE
enumeration	CE
enumeration	EU
enumeration	FK
enumeration	FO
enumeration	FJ
enumeration	FI
enumeration	FR
enumeration	FX
enumeration	GF
enumeration	PF
enumeration	TF
enumeration	GA
enumeration	GM
enumeration	GE
enumeration	GH
enumeration	GI
enumeration	GD
enumeration	GR
enumeration	GL
enumeration	GP
enumeration	GU
enumeration	GT
enumeration	GG
enumeration	GN
enumeration	GW
enumeration	GY
enumeration	HT
enumeration	HM
enumeration	HN
enumeration	HK
enumeration	IN
enumeration	ID
enumeration	IM
enumeration	IQ
enumeration	IR
enumeration	IE
enumeration	IS
enumeration	IL
enumeration	IT
enumeration	JM
enumeration	JP
enumeration	YE
enumeration	JE
enumeration	JO
enumeration	YU
enumeration	KY
enumeration	KH
enumeration	CM

enumeration	CA
enumeration	IC
enumeration	CV
enumeration	KZ
enumeration	QA
enumeration	KE
enumeration	KG
enumeration	KI
enumeration	CC
enumeration	CO
enumeration	KM
enumeration	CD
enumeration	CG
enumeration	KP
enumeration	KR
enumeration	HR
enumeration	CU
enumeration	KW
enumeration	LA
enumeration	LS
enumeration	LV
enumeration	LB
enumeration	LR
enumeration	LY
enumeration	LI
enumeration	LT
enumeration	LU
enumeration	MO
enumeration	MG
enumeration	MW
enumeration	MY
enumeration	MV
enumeration	ML
enumeration	MT
enumeration	MA
enumeration	MH
enumeration	MQ
enumeration	MR
enumeration	MU
enumeration	YT
enumeration	MK
enumeration	MX
enumeration	FM
enumeration	MD
enumeration	MC
enumeration	MN
enumeration	ME
enumeration	MS
enumeration	MZ
enumeration	MM
enumeration	NA
enumeration	NR
enumeration	NP
enumeration	NC
enumeration	NZ
enumeration	NT
enumeration	NI
enumeration	NL
enumeration	AN
enumeration	NE

enumeration	NG
enumeration	NU
enumeration	MP
enumeration	NF
enumeration	NO
enumeration	OM
enumeration	AT
enumeration	TL
enumeration	PK
enumeration	PS
enumeration	PW
enumeration	PA
enumeration	PG
enumeration	PY
enumeration	PE
enumeration	PH
enumeration	PN
enumeration	PL
enumeration	PT
enumeration	PR
enumeration	RE
enumeration	RW
enumeration	RO
enumeration	RU
enumeration	SB
enumeration	BL
enumeration	MF
enumeration	ZM
enumeration	WS
enumeration	SM
enumeration	ST
enumeration	SA
enumeration	SE
enumeration	CH
enumeration	SN
enumeration	RS
enumeration	CS
enumeration	SC
enumeration	SL
enumeration	ZW
enumeration	SG
enumeration	SX
enumeration	SK
enumeration	SI
enumeration	SO
enumeration	ES
enumeration	LK
enumeration	SH
enumeration	KN
enumeration	LC
enumeration	PM
enumeration	VC
enumeration	ZA
enumeration	SD
enumeration	GS
enumeration	SS
enumeration	SR
enumeration	SJ
enumeration	SZ
enumeration	SY

element cCurrency

10.01.2021

diagram							
type	Currency_CL						
used by	complexType ArticlesType						
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß ß)*</td></tr> <tr> <td>enumeration</td><td>EUR</td></tr> </tbody> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß ß)*	enumeration	EUR
Kind	Value						
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß ß)*						
enumeration	EUR						
source	<code><xs:element name="cCurrencyPro" type="Currency_CL"/></code>						

diagram							
type	Currency CL						
used by	complexType ArticlesType						
facets	<table border="1"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] . &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*</td></tr> <tr> <td>enumeration</td><td>EUR</td></tr> </table>	Kind	Value	pattern	([! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] . < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*	enumeration	EUR
Kind	Value						
pattern	([! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] . < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*						
enumeration	EUR						
source	<code><xs:element name="cCurrencyUVP" type="Currency_CL"/></code>						

diagram											
type	Discontinued CL										
used by	complexType ArticlesType										
facets	<table border="0"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D;\\. / [0-9]) &#x3C; = > &#x40; [A-Z] \\^ _ '[a-z] ü û ä ö ö ß ß)*</td></tr> <tr> <td>enumeration</td><td>Yes</td></tr> <tr> <td>enumeration</td><td>Yes-Successor</td></tr> <tr> <td>enumeration</td><td>No</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\ * \\+ , -\\. / [0-9]) < = > @ [A-Z] \\^ _ '[a-z] ü û ä ö ö ß ß)*	enumeration	Yes	enumeration	Yes-Successor	enumeration	No
Kind	Value										
pattern	(! " # $ % & ' \\(\\ * \\+ , -\\. / [0-9]) < = > @ [A-Z] \\^ _ '[a-z] ü û ä ö ö ß ß)*										
enumeration	Yes										
enumeration	Yes-Successor										
enumeration	No										
source	<code><xs:element name="cDiscontinued" type="Discontinued_CL"/></code>										

diagram	
type	Display CL
used by	complexType ArticlesType

facets	Kind	Value
	pattern	(! " # $ % & ' \\(\\)* \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
	enumeration	3
	enumeration	0
	enumeration	1
	enumeration	2
source	<xs:element name="cDisplayIn" type="Display_CL"/>	

element **cDocumentType**


diagram		
type	Doctype CL Document Article	
used by	element	ArticlesType/ArticleDocuments
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3A
	enumeration	DB
	enumeration	GG
	enumeration	IS
	enumeration	MA
	enumeration	PA
	enumeration	PP
	enumeration	ZL
	enumeration	SB
	enumeration	SF
	enumeration	PF
	enumeration	TZ
	enumeration	VI
	enumeration	WA
	enumeration	LE
	enumeration	EL
	enumeration	UP
	enumeration	WL
	enumeration	VM
	enumeration	VT
	enumeration	EP
	enumeration	BS
	enumeration	EX
	enumeration	KS
	enumeration	CE
	enumeration	VD
	enumeration	SS
	enumeration	PL
source	<xs:element name="cDocumentType" type="Doctype_CL_Document_Article"/>	

diagram																																	
type	Rawmaterial CL																																
used by	element ArticlesType/ArticleRawmaterials																																
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü û ä ö ő ß)*</td></tr> <tr> <td>enumeration</td><td>AL</td></tr> <tr> <td>enumeration</td><td>PB</td></tr> <tr> <td>enumeration</td><td>CR</td></tr> <tr> <td>enumeration</td><td>AU</td></tr> <tr> <td>enumeration</td><td>CD</td></tr> <tr> <td>enumeration</td><td>CU</td></tr> <tr> <td>enumeration</td><td>MG</td></tr> <tr> <td>enumeration</td><td>MS</td></tr> <tr> <td>enumeration</td><td>NI</td></tr> <tr> <td>enumeration</td><td>PL</td></tr> <tr> <td>enumeration</td><td>AG</td></tr> <tr> <td>enumeration</td><td>W</td></tr> <tr> <td>enumeration</td><td>ZN</td></tr> <tr> <td>enumeration</td><td>SN</td></tr> </tbody> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ ' [a-z] ü û ä ö ő ß)*	enumeration	AL	enumeration	PB	enumeration	CR	enumeration	AU	enumeration	CD	enumeration	CU	enumeration	MG	enumeration	MS	enumeration	NI	enumeration	PL	enumeration	AG	enumeration	W	enumeration	ZN	enumeration	SN
Kind	Value																																
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ ' [a-z] ü û ä ö ő ß)*																																
enumeration	AL																																
enumeration	PB																																
enumeration	CR																																
enumeration	AU																																
enumeration	CD																																
enumeration	CU																																
enumeration	MG																																
enumeration	MS																																
enumeration	NI																																
enumeration	PL																																
enumeration	AG																																
enumeration	W																																
enumeration	ZN																																
enumeration	SN																																
source	<code><xs:element name="cMaterial" type="Rawmaterial_CL"/></code>																																

diagram																									
type	Measureddeclaration_CL																								
used by	element ArticlesType/ArticleMeasures																								
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>enumeration</td> <td>WD</td> </tr> <tr> <td>enumeration</td> <td>DW</td> </tr> <tr> <td>enumeration</td> <td>VW</td> </tr> <tr> <td>enumeration</td> <td>DI</td> </tr> <tr> <td>enumeration</td> <td>FN</td> </tr> <tr> <td>enumeration</td> <td>AAI</td> </tr> <tr> <td>enumeration</td> <td>BW</td> </tr> <tr> <td>enumeration</td> <td>HT</td> </tr> <tr> <td>enumeration</td> <td>LN</td> </tr> <tr> <td>enumeration</td> <td>DP</td> </tr> <tr> <td>enumeration</td> <td>ABJ</td> </tr> </tbody> </table>	Kind	Value	enumeration	WD	enumeration	DW	enumeration	VW	enumeration	DI	enumeration	FN	enumeration	AAI	enumeration	BW	enumeration	HT	enumeration	LN	enumeration	DP	enumeration	ABJ
Kind	Value																								
enumeration	WD																								
enumeration	DW																								
enumeration	VW																								
enumeration	DI																								
enumeration	FN																								
enumeration	AAI																								
enumeration	BW																								
enumeration	HT																								
enumeration	LN																								
enumeration	DP																								
enumeration	ABJ																								
source	<code><xs:element name="cMeasureddeclaration" type="Measureddeclaration_CL"/></code>																								

diagram	
type	Unit CL

element **cPackageKind**

10.01.2021

element **cPictureType**


element **cPictureUse**

element **cPriceunit**


Seite 25 von 129

	enumeration DZN enumeration GRM enumeration HLT enumeration KGM enumeration KTM enumeration MTQ enumeration CMQ enumeration LTR enumeration MTR enumeration MMT enumeration PR enumeration MTK enumeration CMK enumeration SET enumeration PCE enumeration TNE enumeration CMT
source	<code><xs:element name="cPriceunit" type="Unit_CL"/></code>

element **cPriceunitPro**

diagram																																					
type	Unit_CL																																				
used by	complexType ArticlesType																																				
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr><td>enumeration</td><td>DZN</td></tr> <tr><td>enumeration</td><td>GRM</td></tr> <tr><td>enumeration</td><td>HLT</td></tr> <tr><td>enumeration</td><td>KGM</td></tr> <tr><td>enumeration</td><td>KTM</td></tr> <tr><td>enumeration</td><td>MTQ</td></tr> <tr><td>enumeration</td><td>CMQ</td></tr> <tr><td>enumeration</td><td>LTR</td></tr> <tr><td>enumeration</td><td>MTR</td></tr> <tr><td>enumeration</td><td>MMT</td></tr> <tr><td>enumeration</td><td>PR</td></tr> <tr><td>enumeration</td><td>MTK</td></tr> <tr><td>enumeration</td><td>CMK</td></tr> <tr><td>enumeration</td><td>SET</td></tr> <tr><td>enumeration</td><td>PCE</td></tr> <tr><td>enumeration</td><td>TNE</td></tr> <tr><td>enumeration</td><td>CMT</td></tr> </tbody> </table>	Kind	Value	enumeration	DZN	enumeration	GRM	enumeration	HLT	enumeration	KGM	enumeration	KTM	enumeration	MTQ	enumeration	CMQ	enumeration	LTR	enumeration	MTR	enumeration	MMT	enumeration	PR	enumeration	MTK	enumeration	CMK	enumeration	SET	enumeration	PCE	enumeration	TNE	enumeration	CMT
Kind	Value																																				
enumeration	DZN																																				
enumeration	GRM																																				
enumeration	HLT																																				
enumeration	KGM																																				
enumeration	KTM																																				
enumeration	MTQ																																				
enumeration	CMQ																																				
enumeration	LTR																																				
enumeration	MTR																																				
enumeration	MMT																																				
enumeration	PR																																				
enumeration	MTK																																				
enumeration	CMK																																				
enumeration	SET																																				
enumeration	PCE																																				
enumeration	TNE																																				
enumeration	CMT																																				
source	<code><xs:element name="cPriceunitPro" type="Unit_CL"/></code>																																				

element **cPriceunitUVP**

diagram	
type	Unit_CL
used by	complexType ArticlesType


element **cTaxCode**

element **cUnit**


10.01.2021

	enumeration MMT enumeration PR enumeration MTK enumeration CMK enumeration SET enumeration PCE enumeration TNE enumeration CMT
source	<code><xs:element name="cUnit" type="Unit_CL"/></code>

element **cUnitA**

diagram	
type	LengthUnit_CL
used by	complexTypes ArticlesType PackageUnitType
facets	Kind Value enumeration KTM enumeration MTR enumeration MMT enumeration CMT
source	<code><xs:element name="cUnitA" type="LengthUnit_CL"/></code>

element **cUnitB**

diagram	
type	LengthUnit_CL
used by	complexTypes ArticlesType PackageUnitType
facets	Kind Value enumeration KTM enumeration MTR enumeration MMT enumeration CMT
source	<code><xs:element name="cUnitB" type="LengthUnit_CL"/></code>

element **cUnitC**

diagram	
type	LengthUnit_CL
used by	complexTypes ArticlesType PackageUnitType
facets	Kind Value enumeration KTM enumeration MTR enumeration MMT enumeration CMT

source	<code><xs:element name="cUnitC" type="LengthUnit_CL"/></code>
--------	---

element **cUnitweight**

diagram									
type	WeightUnit_CL								
used by	complexTypes ArticlesType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>enumeration</td><td>GRM</td></tr> <tr> <td>enumeration</td><td>KGM</td></tr> <tr> <td>enumeration</td><td>TNE</td></tr> </table>	Kind	Value	enumeration	GRM	enumeration	KGM	enumeration	TNE
Kind	Value								
enumeration	GRM								
enumeration	KGM								
enumeration	TNE								
source	<code><xs:element name="cUnitweight" type="WeightUnit_CL"/></code>								

element **cWeightbaseUnit**


diagram																																					
type	Unit_CL																																				
used by	element ArticlesType/ArticleRawmaterials																																				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr><td>enumeration</td><td>DZN</td></tr> <tr><td>enumeration</td><td>GRM</td></tr> <tr><td>enumeration</td><td>HLT</td></tr> <tr><td>enumeration</td><td>KGM</td></tr> <tr><td>enumeration</td><td>KTM</td></tr> <tr><td>enumeration</td><td>MTQ</td></tr> <tr><td>enumeration</td><td>CMQ</td></tr> <tr><td>enumeration</td><td>LTR</td></tr> <tr><td>enumeration</td><td>MTR</td></tr> <tr><td>enumeration</td><td>MMT</td></tr> <tr><td>enumeration</td><td>PR</td></tr> <tr><td>enumeration</td><td>MTK</td></tr> <tr><td>enumeration</td><td>CMK</td></tr> <tr><td>enumeration</td><td>SET</td></tr> <tr><td>enumeration</td><td>PCE</td></tr> <tr><td>enumeration</td><td>TNE</td></tr> <tr><td>enumeration</td><td>CMT</td></tr> </table>	Kind	Value	enumeration	DZN	enumeration	GRM	enumeration	HLT	enumeration	KGM	enumeration	KTM	enumeration	MTQ	enumeration	CMQ	enumeration	LTR	enumeration	MTR	enumeration	MMT	enumeration	PR	enumeration	MTK	enumeration	CMK	enumeration	SET	enumeration	PCE	enumeration	TNE	enumeration	CMT
Kind	Value																																				
enumeration	DZN																																				
enumeration	GRM																																				
enumeration	HLT																																				
enumeration	KGM																																				
enumeration	KTM																																				
enumeration	MTQ																																				
enumeration	CMQ																																				
enumeration	LTR																																				
enumeration	MTR																																				
enumeration	MMT																																				
enumeration	PR																																				
enumeration	MTK																																				
enumeration	CMK																																				
enumeration	SET																																				
enumeration	PCE																																				
enumeration	TNE																																				
enumeration	CMT																																				
source	<code><xs:element name="cWeightbaseUnit" type="Unit_CL"/></code>																																				

element **cWeightrateUnit**


diagram	
type	Unit_CL
used by	element ArticlesType/ArticleRawmaterials

facets	Kind	Value
	enumeration	DZN
	enumeration	GRM
	enumeration	HLT
	enumeration	KGM
	enumeration	KTM
	enumeration	MTQ
	enumeration	CMQ
	enumeration	LTR
	enumeration	MTR
	enumeration	MMT
	enumeration	PR
	enumeration	MTK
	enumeration	CMK
	enumeration	SET
	enumeration	PCE
	enumeration	TNE
	enumeration	CMT
source	<xs:element name="cWeightrateUnit" type="Unit_CL"/>	


element **dConstructionFrom**

diagram		
type	DateFormat	
used by	element	SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct
	complexTypes	ArticlesType HistoricProductsType
facets	Kind	Value
	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))
source	<xs:element name="dConstructionFrom" type="DateFormat"/>	

element **dConstructionTo**

diagram		
type	DateFormat	
used by	complexTypes	ArticlesType HistoricProductsType
facets	Kind	Value
	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))
source	<xs:element name="dConstructionTo" type="DateFormat"/>	

element **dDiscontinuedStart**

diagram		
---------	---	--

type	DateFormat				
used by	complexType ArticlesType				
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))				
source	<code><xs:element name="dDiscontinuedStart" type="DateFormat"/></code>				

element **dValidityBegin**

diagram					
type	DateFormat				
used by	complexType ArticlesType HeaderType				
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))				
source	<code><xs:element name="dValidityBegin" type="DateFormat"/></code>				

element **dValidityEnd**

diagram					
type	DateFormat				
used by	complexType ArticlesType HeaderType				
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9] ([12][0-9] 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9] ([1][0-9] 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9] ([12][0-9])02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96)))				
source	<code><xs:element name="dValidityEnd" type="DateFormat"/></code>				


element **nAmount**

diagram									
type	Decimal 16 3								
used by	element ArticlesType/ArticleAccessories								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nAmount" type="Decimal_16_3"/></code>								


element **nDeliveryTime**

diagram							
type	Int 8 Trennzeichen						
used by	complexType ArticlesType						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99999999
Kind	Value						
minInclusive	1						
maxInclusive	99999999						
source	<code><xs:element name="nDeliveryTime" type="Int_8_Trennzeichen"/></code>						


element **nDocOrder**

diagram									
type	Int 10 Trennzeichen								
used by	<table> <tr> <th>elements</th><th></th></tr> <tr> <td>ArticlesType/ArticleDocuments</td><td>ArticlesType/ArticlePictures</td></tr> <tr> <td>HistoricProductsType/HistoricProductDocs</td><td>HistoricProductsType/HistoricProductPics</td></tr> <tr> <td>GroupDocumentType</td><td></td></tr> </table>	elements		ArticlesType/ArticleDocuments	ArticlesType/ArticlePictures	HistoricProductsType/HistoricProductDocs	HistoricProductsType/HistoricProductPics	GroupDocumentType	
elements									
ArticlesType/ArticleDocuments	ArticlesType/ArticlePictures								
HistoricProductsType/HistoricProductDocs	HistoricProductsType/HistoricProductPics								
GroupDocumentType									
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>9999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	9999999999		
Kind	Value								
minInclusive	1								
maxInclusive	9999999999								
source	<code><xs:element name="nDocOrder" type="Int_10_Trennzeichen"/></code>								

element **nMeasure**


diagram									
type	Decimal 16 3								
used by	element ArticlesType/ArticleMeasures								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<code><xs:element name="nMeasure" type="Decimal_16_3"/></code>								

element **nMeasureA**


diagram					
type	Decimal 16 3				
used by	complexType ArticlesType PackageUnitType				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> </table>	Kind	Value	minInclusive	0.001
Kind	Value				
minInclusive	0.001				

	totalDigits 16 fractionDigits 3
source	<code><xs:element name="nMeasureA" type="Decimal_16_3"/></code>


element **nMeasureB**

diagram	
type	Decimal 16 3
used by	complexTypes ArticlesType PackageUnitType
facets	Kind Value minInclusive 0.001 totalDigits 16 fractionDigits 3
source	<code><xs:element name="nMeasureB" type="Decimal_16_3"/></code>

element **nMeasureC**

diagram	
type	Decimal 16 3
used by	complexTypes ArticlesType PackageUnitType
facets	Kind Value minInclusive 0.001 totalDigits 16 fractionDigits 3
source	<code><xs:element name="nMeasureC" type="Decimal_16_3"/></code>

element **nMinOrder**

diagram	
type	Decimal 16 3
used by	complexType ArticlesType
facets	Kind Value minInclusive 0.001 totalDigits 16 fractionDigits 3
source	<code><xs:element name="nMinOrder" type="Decimal_16_3"/></code>

element **nPackageAmount**

diagram	
---------	---

type	Int 8 Trennzeichen	
used by	complexType	ArticlesType
facets	Kind	Value
	minInclusive	1
	maxInclusive	99999999
source	<xs:element name="nPackageAmount" type="Int_8_Trennzeichen"/>	


element **nPrice**

diagram		
type	Decimal 15 2	
used by	element	ArticlesType/PriceLine
facets	Kind	Value
	minInclusive	0.0
	totalDigits	15
	fractionDigits	2
source	<xs:element name="nPrice" type="Decimal_15_2"/>	


element **nPricebase**

diagram		
type	Int 9 Trennzeichen	
used by	element	ArticlesType/PriceLine
facets	Kind	Value
	minInclusive	1
	maxInclusive	999999999
source	<xs:element name="nPricebase" type="Int_9_Trennzeichen"/>	

element **nPricebasePro**

diagram		
type	Int 9 Trennzeichen	
used by	complexType	ArticlesType
facets	Kind	Value
	minInclusive	1
	maxInclusive	999999999
source	<xs:element name="nPricebasePro" type="Int_9_Trennzeichen"/>	

element **nPricebaseUVP**

diagram							
type	Int 9 Trennzeichen						
used by	complexType ArticlesType						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	999999999
Kind	Value						
minInclusive	1						
maxInclusive	999999999						
source	<code><xs:element name="nPricebaseUVP" type="Int_9_Trennzeichen"/></code>						


element **nPricePro**

diagram									
type	Decimal 15 2								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<code><xs:element name="nPricePro" type="Decimal_15_2"/></code>								

element **nPriceUVP**


diagram									
type	Decimal 15 2								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<code><xs:element name="nPriceUVP" type="Decimal_15_2"/></code>								

element **nQuantity**

diagram							
type	Decimal 16 3						
used by	<table> <tr> <td>element</td><td>ArticlesType/ArticleSets</td></tr> <tr> <td>complexType</td><td>PackageUnitType</td></tr> </table>	element	ArticlesType/ArticleSets	complexType	PackageUnitType		
element	ArticlesType/ArticleSets						
complexType	PackageUnitType						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16
Kind	Value						
minInclusive	0.001						
totalDigits	16						

	fractionDigits 3
source	<code><xs:element name="nQuantity" type="Decimal_16_3"/></code>


element **nRow**

diagram	
type	Int 3 Type
used by	element SparepartlistsType/Spareparts
facets	Kind Value pattern ([0-9]{1,3})
source	<code><xs:element name="nRow" type="Int_3_Type"/></code>

element **nShelfLife**

diagram	
type	Int 1 99 Type
used by	complexType ArticlesType
facets	Kind Value minInclusive 1 maxInclusive 99
source	<code><xs:element name="nShelfLife" type="Int_1_99_Type"/></code>

element **nTextRow**


diagram	
type	Int 2 Trennzeichen
used by	elements ArticlesType/ArticleTexts LongtextType/Longtexts
facets	Kind Value minInclusive 1 maxInclusive 99
source	<code><xs:element name="nTextRow" type="Int_2_Trennzeichen"/></code>

element **nWeight**

diagram	
type	Decimal 16 3
used by	complexTypes ArticlesType PackageUnitType

facets	Kind	Value
	minInclusive	0.001
	totalDigits	16
	fractionDigits	3
source	<xs:element name="nWeight" type="Decimal_16_3"/>	

element **nWeigthbase**

diagram		
type	Decimal 18 4	
used by	element	ArticlesType/ArticleRawmaterials
facets	Kind	Value
	minInclusive	0.0001
	totalDigits	18
	fractionDigits	4
source	<xs:element name="nWeigthbase" type="Decimal_18_4"/>	

element **nWeigthrate**

diagram		
type	Decimal 18 4	
used by	element	ArticlesType/ArticleRawmaterials
facets	Kind	Value
	minInclusive	0.0001
	totalDigits	18
	fractionDigits	4
source	<xs:element name="nWeigthrate" type="Decimal_18_4"/>	

element **PriceOnDemand**


diagram		
type	PriceOnDemand Type	
used by	complexType	ArticlesType
facets	Kind	Value
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] : < = > \\? @ [A-Z] \\^ _ ` [a-z] ü Û ä Ä ö Ö § ß)*
	enumeration	PAA
source	<xs:element name="PriceOnDemand" type="PriceOnDemand_Type"/>	

diagram									
type	String 15 Type								
used by	element ArticlesType/ArticleAccessories								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9]) &#x3C; = > \\? &#x40; [A-Z]]\\^ _ ' [a-z] ü û ä Ä ö Ö ß *)</td></tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	15	pattern	([! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9]) < = > \\? @ [A-Z]]\\^ _ ' [a-z] ü û ä Ä ö Ö ß *)
Kind	Value								
minLength	1								
maxLength	15								
pattern	([! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9]) < = > \\? @ [A-Z]]\\^ _ ' [a-z] ü û ä Ä ö Ö ß *)								
source	<code><xs:element name="sAccessory" type="String_15_Type"/></code>								

diagram	
type	String 15 Type
used by	complexType ArticlesType
facets	Kind Value minLength 1 maxLength 15 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. \\/ [-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú ü ä ö ö ß)*
source	<code><xs:element name="sAlternate" type="String_15_Type"/></code>

diagram									
type	Artikelnummer								
used by	complexType ArticlesType								
facets	<table border="1"> <tr> <td>Kind</td> <td>Value</td> </tr> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>maxLength</td> <td>15</td> </tr> <tr> <td>pattern</td> <td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö ß *)</td> </tr> </table>	Kind	Value	minLength	1	maxLength	15	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö ß *)
Kind	Value								
minLength	1								
maxLength	15								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö ß *)								
source	<code><xs:element name="sArticle" type="Artikelnummer"/></code>								

diagram	
type	String 35 Type
used by	complexType ArticlesType

element **sAssignedArticle**

element **sAttribute**class

element **sAttributedescription**

Seite 39 von 129

source	<code><xs:element name="sAttributedescription" type="String_60_Extended_Type"/></code>
--------	--

element **sAttributename**

diagram									
type	String_60_Extended_Type								
used by	element ArticlesType/ArticleAttribute								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>60</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	60	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	60								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*								
source	<code><xs:element name="sAttributename" type="String_60_Extended_Type"/></code>								


element **sAttributevalue**

diagram									
type	String_60_Extended_Type								
used by	element ArticlesType/ArticleAttribute								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>60</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	60	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	60								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*								
source	<code><xs:element name="sAttributevalue" type="String_60_Extended_Type"/></code>								


element **sAttributevalue2**

diagram									
type	String_60_Extended_Type								
used by	element ArticlesType/ArticleAttribute								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>60</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	60	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	60								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*								
source	<code><xs:element name="sAttributevalue2" type="String_60_Extended_Type"/></code>								

element **sBonusgroup**

diagram									
type	String_35_Type								
used by	complexTypes ArticlesType BonusgroupsType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)</td></tr> </table>	Kind	Value	minLength	1	maxLength	35	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)
Kind	Value								
minLength	1								
maxLength	35								
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)								
source	<code><xs:element name="sBonusgroup" type="String_35_Type"/></code>								


element **sCatalogDesc**

diagram									
type	String_35_Type								
used by	complexType HeaderType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)</td></tr> </table>	Kind	Value	minLength	1	maxLength	35	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)
Kind	Value								
minLength	1								
maxLength	35								
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)								
source	<code><xs:element name="sCatalogDesc" type="String_35_Type"/></code>								

element **sCatalogID**

diagram									
type	String_35_Type								
used by	complexType HeaderType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)</td></tr> </table>	Kind	Value	minLength	1	maxLength	35	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)
Kind	Value								
minLength	1								
maxLength	35								
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ \\'[a-z] ü Û ä Ä ö Ö § ß]*)								
source	<code><xs:element name="sCatalogID" type="String_35_Type"/></code>								

element **sConstructiontext**

diagram	
type	String_35_Type
used by	complexTypes ArticlesType HistoricProductsType

element **sDescription**

element **sDescriptionLong**

element **sDescriptionMarketing**


Seite 42 von 129

source	<code><xs:element name="sDescriptionMarketing" type="String_10000_Extended_Type"/></code>
--------	---


element **sDescriptionShort**

diagram									
type	String 256 Extended Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	256	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	256								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*								
source	<code><xs:element name="sDescriptionShort" type="String_256_Extended_Type"/></code>								

element **sDimensiontext**

diagram									
type	String 0 40 Type								
used by	element ArticlesType/ArticleTexts								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	0	maxLength	40	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	0								
maxLength	40								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*								
source	<code><xs:element name="sDimensiontext" type="String_0_40_Type"/></code>								


element **sDiscountgroup**

diagram									
type	String 4 Type								
used by	complexType ArticlesType DiscountgroupsType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>4</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	4	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	4								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*								
source	<code><xs:element name="sDiscountgroup" type="String_4_Type"/></code>								


element **sDocDescription**

diagram									
type	String_40_Type								
used by	elements ArticlesType/ArticleDocuments ArticlesType/ArticlePictures HistoricProductsType/HistoricProductDocs HistoricProductsType/HistoricProductPics complexType GroupDocumentType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	40	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*
Kind	Value								
minLength	1								
maxLength	40								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*								
source	<code><xs:element name="sDocDescription" type="String_40_Type"/></code>								


element **sDocument**

diagram									
type	String_35_Type								
used by	elements ArticlesType/ArticleDocuments ArticlesType/ArticlePictures HistoricProductsType/HistoricProductDocs HistoricProductsType/HistoricProductPics complexType GroupDocumentType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>35</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	35	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*
Kind	Value								
minLength	1								
maxLength	35								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*								
source	<code><xs:element name="sDocument" type="String_35_Type"/></code>								

element **sEan**

diagram									
type	String_14_Type								
used by	complexType ArticlesType HistoricProductsType PackageUnitType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>14</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	14	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*
Kind	Value								
minLength	1								
maxLength	14								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ä ö ö § ß)*								
source	<code><xs:element name="sEan" type="String_14_Type"/></code>								

element **sExplodedView**

diagram	
---------	---

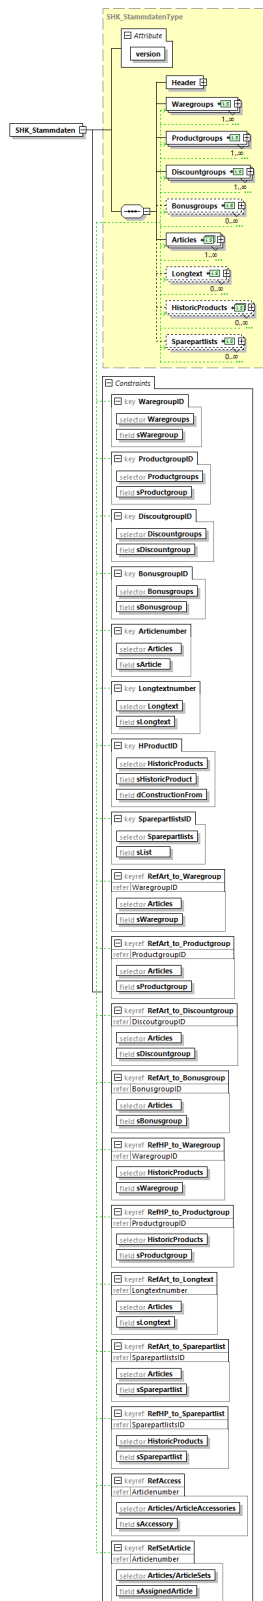
type	String_35_Type	
used by	complexType	ArticlesType HistoricProductsType
facets	Kind	Value
	minLength	1
	maxLength	35
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / 0-9 : < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sExplodedView" type="String_35_Type"/>	

element **sHistoricProduct**

diagram		
type	String_15_Type	
used by	element complexType	SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct HistoricProductsType
facets	Kind	Value
	minLength	1
	maxLength	15
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / 0-9 : < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sHistoricProduct" type="String_15_Type"/>	

element **SHK_Stammdaten**

diagram



type	SHK_StammdatenType				
children	Header Waregroups Productgroups Discountgroups Bonusgroups Articles Longtext HistoricProducts Sparepartlists				
attributes	Name version	Type xs:string	Use required	Default	Fixed 7.0
identity constraints		Name	Refer	Selector	Field(s)
	key	WaregroupID		Waregroups	sWaregroup
	key	ProductgroupID		Productgroups	sProductgroup
	key	DiscountgroupID		Discountgroups	sDiscountgroup
	key	BonusgroupID		Bonusgroups	sBonusgroup
	key	Articlenumber		Articles	sArticle
	key	Longtextnumber		Longtext	sLongtext
	key	HProductID		HistoricProducts	sHistoricProduct dConstructionFrom
	key	SparepartlistsID		Sparepartlists	sList
	keyref	RefArt_to_Waregroup	WaregroupID	Articles	sWaregroup
	keyref	RefArt_to_Productgroup	ProductgroupID	Articles	sProductgroup
	keyref	RefArt_to_Discountgroup	DiscountgroupID	Articles	sDiscountgroup
	keyref	RefArt_to_Bonusgroup	BonusgroupID	Articles	sBonusgroup
	keyref	RefHP_to_Waregroup	WaregroupID	HistoricProducts	sWaregroup
	keyref	RefHP_to_Productgroup	ProductgroupID	HistoricProducts	sProductgroup
	keyref	RefArt_to_Longtext	Longtextnumber	Articles	sLongtext
	keyref	RefArt_to_Sparepartlist	SparepartlistsID	Articles	sSparepartlist
	keyref	RefHP_to_Sparepartlist	SparepartlistsID	HistoricProducts	sSparepartlist
	keyref	RefAccess	Articlenumber	Articles/ArticleAccessories	sAccessory
	keyref	RefSetArticle	Articlenumber	Articles/ArticleSets	sAssignedArticle
source	<pre> <xs:element name="SHK_Stammdaten" type="SHK_StammdatenType"> <xs:key name="WaregroupID"> <xs:selector xpath="Waregroups"/> <xs:field xpath="sWaregroup"/> </xs:key> <xs:key name="ProductgroupID"> <xs:selector xpath="Productgroups"/> <xs:field xpath="sProductgroup"/> </xs:key> <xs:key name="DiscountgroupID"> <xs:selector xpath="Discountgroups"/> <xs:field xpath="sDiscountgroup"/> </xs:key> <xs:key name="BonusgroupID"> <xs:selector xpath="Bonusgroups"/> <xs:field xpath="sBonusgroup"/> </xs:key> <xs:key name="Articlenumber"> <xs:selector xpath="Articles"/> <xs:field xpath="sArticle"/> </xs:key> <xs:key name="Longtextnumber"> <xs:selector xpath="Longtext"/> <xs:field xpath="sLongtext"/> </xs:key> <xs:key name="HProductID"> <xs:selector xpath="HistoricProducts"/> </pre>				

```

    <xs:field xpath="sHistoricProduct"/>
    <xs:field xpath="dConstructionFrom"/>
  </xs:key>
  <xs:key name="SparepartlistsID">
    <xs:selector xpath="Sparepartlists"/>
    <xs:field xpath="sList"/>
  </xs:key>
  <xs:keyref name="RefArt_to_Waregroup" refer="WaregroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sWaregroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Productgroup" refer="ProductgroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sProductgroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Discountgroup" refer="DiscountgroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sDiscountgroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Bonusgroup" refer="BonusgroupID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sBonusgroup"/>
  </xs:keyref>
  <xs:keyref name="RefHP_to_Waregroup" refer="WaregroupID">
    <xs:selector xpath="HistoricProducts"/>
    <xs:field xpath="sWaregroup"/>
  </xs:keyref>
  <xs:keyref name="RefHP_to_Productgroup" refer="ProductgroupID">
    <xs:selector xpath="HistoricProducts"/>
    <xs:field xpath="sProductgroup"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Longtext" refer="Longtextnumber">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sLongtext"/>
  </xs:keyref>
  <xs:keyref name="RefArt_to_Sparepartlist" refer="SparepartlistsID">
    <xs:selector xpath="Articles"/>
    <xs:field xpath="sSparepartlist"/>
  </xs:keyref>
  <xs:keyref name="RefHP_to_Sparepartlist" refer="SparepartlistsID">
    <xs:selector xpath="HistoricProducts"/>
    <xs:field xpath="sSparepartlist"/>
  </xs:keyref>
  <xs:keyref name="RefAccess" refer="Articlenumber">
    <xs:selector xpath="Articles/ArticleAccessories"/>
    <xs:field xpath="sAccessory"/>
  </xs:keyref>
  <xs:keyref name="RefSetArticle" refer="Articlenumber">
    <xs:selector xpath="Articles/ArticleSets"/>
    <xs:field xpath="sAssignedArticle"/>
  </xs:keyref>
</xs:element>

```

diagram	
type	String_35_Type
used by	complexType SparepartlistsType
facets	Kind Value minLength 1 maxLength 35 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\\ \" * \\+ , &#x2D;\\.\\/ [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ \"[a-z] ü ä ö Ö š ß)*
source	<xselement name="sList" type="String_35_Type"/>

diagram	
type	String_8_Type
used by	complexTypes ArticlesType LongtextType
facets	Kind Value minLength 1 maxLength 8 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\\ \"*\ \\+ . &#x2D;\\.\\/ [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ \"'[a-z]ú ü ä Ä ö Ö § ß)*
source	<xselement name="sLongtext" type="String_8_Type"/>

diagram									
type	String_35_Type								
used by	complexType HeaderType								
facets	<table border="1"> <thead> <tr> <th>Kind</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>maxLength</td> <td>35</td> </tr> <tr> <td>pattern</td> <td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß)*</td> </tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	35	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	35								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö ß)*								
source	<code><xs:element name="sMessageName" type="String_35_Type"/></code>								

diagram	
type	String 35 Type
facets	Kind Value


element **sMixedpalette**

element **sModelNumber**


element sPosition

Seite 50 von 129


element **sPricegroup**

diagram									
type	String 5 Type								
used by	element SparepartlistsType/Spareparts/ArticleRow								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>5</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	5	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	5								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*								
source	<code><xs:element name="sPricegroup" type="String_5_Type"/></code>								

element **sProductgroup**

diagram									
type	String 10 Type								
used by	complexTypees ArticlesType HistoricProductsType ProductgroupsType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	10								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*								
source	<code><xs:element name="sProductgroup" type="String_10_Type"/></code>								

element **sSerie**

diagram									
type	String 80 Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>80</td></tr> <tr> <td>pattern</td><td>([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	80	pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	80								
pattern	([0-9] [\x20;\x21;\x22;\x23;\x24;%\x26;\x27;\x28;\x29;\x2A-\x2F;\x30-\x39;\x3B;\x3C;=> \? \&\#x40;[A-Z]\^_] [a-z] ü ä ö Ö ß)*								
source	<code><xs:element name="sSerie" type="String_80_Type"/></code>								

element **sShorttext1**

diagram	
type	String 40 Type
used by	complexTypees ArticlesType HistoricProductsType

element **sShorttext2**

element sSparepart

element **sSparepartlist**

Seite 52 von 129

diagram									
type	String 15 Type								
used by	complexType ArticlesType								
facets	<table border="1"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>([0-9] &#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; &#x28; &#x29; &#x2A; &#x2B; &#x2C; &#x2D; &#x2E; &#x2F; &#x30; &#x31; &#x32; &#x33; &#x34; &#x35; &#x36; &#x37; &#x38; &#x39; &#x40; &#x41; &#x42; &#x43; &#x44; &#x45; &#x46; &#x47; &#x48; &#x49; &#x4A; &#x4B; &#x4C; &#x4D; &#x4E; &#x4F; &#x50; &#x51; &#x52; &#x53; &#x54; &#x55; &#x56; &#x57; &#x58; &#x59; &#x5A; &#x5B; &#x5C; &#x5D; &#x5E; &#x5F; &#x60; &#x61; &#x62; &#x63; &#x64; &#x65; &#x66; &#x67; &#x68; &#x69; &#x6A; &#x6B; &#x6C; &#x6D; &#x6E; &#x6F; &#x70; &#x71; &#x72; &#x73; &#x74; &#x75; &#x76; &#x77; &#x78; &#x79; &#x7A; &#x7B; &#x7C; &#x7D; &#x7E; &#x7F; &#x80; &#x81; &#x82; &#x83; &#x84; &#x85; &#x86; &#x87; &#x88; &#x89; &#x8A; &#x8B; &#x8C; &#x8D; &#x8E; &#x8F; &#x90; &#x91; &#x92; &#x93; &#x94; &#x95; &#x96; &#x97; &#x98; &#x99; &#x9A; &#x9B; &#x9C; &#x9D; &#x9E; &#x9F; &#xA0; &#xA1; &#xA2; &#xA3; &#xA4; &#xA5; &#xA6; &#xA7; &#xA8; &#xA9; &#xAA; &#xAB; &#xAC; &#xAD; &#xAE; &#xAF; &#xB0; &#xB1; &#xB2; &#xB3; &#xB4; &#xB5; &#xB6; &#xB7; &#xB8; &#xB9; &#xBA; &#xBB; &#xBC; &#xBD; &#xBE; &#xBF; &#xC0; &#xC1; &#xC2; &#xC3; &#xC4; &#xC5; &#xC6; &#xC7; &#xC8; &#xC9; &#xCA; &#xCB; &#xCC; &#xCD; &#xCE; &#xCF; &#xD0; &#xD1; &#xD2; &#xD3; &#xD4; &#xD5; &#xD6; &#xD7; &#xD8; &#xD9; &#xDA; &#xDB; &#xDC; &#xDD; &#xDE; &#xDF; &#xE0; &#xE1; &#xE2; &#xE3; &#xE4; &#xE5; &#xE6; &#xE7; &#xE8; &#xE9; &#xEA; &#xEB; &#xEC; &#xED; &#xEE; &#xEF; &#xF0; &#xF1; &#xF2; &#xF3; &#xF4; &#xF5; &#xF6; &#xF7; &#xF8; &#xF9; &#xFA; &#xFB; &#xFC; &#xFD; &#xFE; &#xFF; &#x1F00; &#x1F01; &#x1F02; &#x1F03; &#x1F04; &#x1F05; &#x1F06; &#x1F07; &#x1F08; &#x1F09; &#x1F0A; &#x1F0B; &#x1F0C; &#x1F0D; &#x1F0E; &#x1F0F; &#x1F10; &#x1F11; &#x1F12; &#x1F13; &#x1F14; &#x1F15; &#x1F16; &#x1F17; &#x1F18; &#x1F19; &#x1F1A; &#x1F1B; &#x1F1C; &#x1F1D; &#x1F1E; &#x1F1F; &#x1F20; &#x1F21; &#x1F22; &#x1F23; &#x1F24; &#x1F25; &#x1F26; &#x1F27; &#x1F28; &#x1F29; &#x1F2A; &#x1F2B; &#x1F2C; &#x1F2D; &#x1F2E; &#x1F2F; &#x1F30; &#x1F31; &#x1F32; &#x1F33; &#x1F34; &#x1F35; &#x1F36; &#x1F37; &#x1F38; &#x1F39; &#x1F3A; &#x1F3B; &#x1F3C; &#x1F3D; &#x1F3E; &#x1F3F; &#x1F40; &#x1F41; &#x1F42; &#x1F43; &#x1F44; &#x1F45; &#x1F46; &#x1F47; &#x1F48; &#x1F49; &#x1F4A; &#x1F4B; &#x1F4C; &#x1F4D; &#x1F4E; &#x1F4F; &#x1F50; &#x1F51; &#x1F52; &#x1F53; &#x1F54; &#x1F55; &#x1F56; &#x1F57; &#x1F58; &#x1F59; &#x1F5A; &#x1F5B; &#x1F5C; &#x1F5D; &#x1F5E; &#x1F5F; &#x1F60; &#x1F61; &#x1F62; &#x1F63; &#x1F64; &#x1F65; &#x1F66; &#x1F67; &#x1F68; &#x1F69; &#x1F6A; &#x1F6B; &#x1F6C; &#x1F6D; &#x1F6E; &#x1F6F; &#x1F70; &#x1F71; &#x1F72; &#x1F73; &#x1F74; &#x1F75; &#x1F76; &#x1F77; &#x1F78; &#x1F79; &#x1F7A; &#x1F7B; &#x1F7C; &#x1F7D; &#x1F7E; &#x1F7F; &#x1F80; &#x1F81; &#x1F82; &#x1F83; &#x1F84; &#x1F85; &#x1F86; &#x1F87; &#x1F88; &#x1F89; &#x1F8A; &#x1F8B; &#x1F8C; &#x1F8D; &#x1F8E; &#x1F8F; &#x1F90; &#x1F91; &#x1F92; &#x1F93; &#x1F94; &#x1F95; &#x1F96; &#x1F97; &#x1F98; &#x1F99; &#x1F9A; &#x1F9B; &#x1F9C; &#x1F9D; &#x1F9E; &#x1F9F; &#x1FA0; &#x1FA1; &#x1FA2; &#x1FA3; &#x1FA4; &#x1FA5; &#x1FA6; &#x1FA7; &#x1FA8; &#x1FA9; &#x1FAB; &#x1FAC; &#x1FAD; &#x1FAE; &#x1FAF; &#x1FB0; &#x1FB1; &#x1FB2; &#x1FB3; &#x1FB4; &#x1FB5; &#x1FB6; &#x1FB7; &#x1FB8; &#x1FB9; &#x1FBB; &#x1FBC; &#x1FBD; &#x1FBE; &#x1FBF; &#x1FC</td></tr></table>	Kind	Value	minLength	1	maxLength	15	pattern	([0-9] ! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ ἀ ἁ ἂ ἃ ἄ ἅ ἆ ἇ Ἀ Ἁ Ἂ Ἃ Ἄ Ἅ Ἆ Ἇ ἐ ἑ ἒ ἓ ἔ ἕ ἖ ἗ Ἐ Ἑ Ἒ Ἓ Ἔ Ἕ ἞ ἟ ἠ ἡ ἢ ἣ ἤ ἥ ἦ ἧ Ἠ Ἡ Ἢ Ἣ Ἤ Ἥ Ἦ Ἧ ἰ ἱ ἲ ἳ ἴ ἵ ἶ ἷ Ἰ Ἱ Ἲ Ἳ Ἴ Ἵ Ἶ Ἷ ὀ ὁ ὂ ὃ ὄ ὅ ὆ ὇ Ὀ Ὁ Ὂ Ὃ Ὄ Ὅ ὎ ὏ ὐ ὑ ὒ ὓ ὔ ὕ ὖ ὗ ὘ Ὑ ὚ Ὓ ὜ Ὕ ὞ Ὗ ὠ ὡ ὢ ὣ ὤ ὥ ὦ ὧ Ὠ Ὡ Ὢ Ὣ Ὤ Ὥ Ὦ Ὧ ὰ ά ὲ έ ὴ ή ὶ ί ὸ ό ὺ ύ ὼ ώ ὾ ὿ ᾀ ᾁ ᾂ ᾃ ᾄ ᾅ ᾆ ᾇ ᾈ ᾉ ᾊ ᾋ ᾌ ᾍ ᾎ ᾏ ᾐ ᾑ ᾒ ᾓ ᾔ ᾕ ᾖ ᾗ ᾘ ᾙ ᾚ ᾛ ᾜ ᾝ ᾞ ᾟ ᾠ ᾡ ᾢ ᾣ ᾤ ᾥ ᾦ ᾧ ᾨ ᾩ ᾫ ᾬ ᾭ ᾮ ᾯ ᾰ ᾱ ᾲ ᾳ ᾴ ᾵ ᾶ ᾷ Ᾰ Ᾱ Ά ᾼ ᾽ ι ᾿ Ǽ
Kind	Value								
minLength	1								
maxLength	15								
pattern	([0-9] ! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ ἀ ἁ ἂ ἃ ἄ ἅ ἆ ἇ Ἀ Ἁ Ἂ Ἃ Ἄ Ἅ Ἆ Ἇ ἐ ἑ ἒ ἓ ἔ ἕ ἖ ἗ Ἐ Ἑ Ἒ Ἓ Ἔ Ἕ ἞ ἟ ἠ ἡ ἢ ἣ ἤ ἥ ἦ ἧ Ἠ Ἡ Ἢ Ἣ Ἤ Ἥ Ἦ Ἧ ἰ ἱ ἲ ἳ ἴ ἵ ἶ ἷ Ἰ Ἱ Ἲ Ἳ Ἴ Ἵ Ἶ Ἷ ὀ ὁ ὂ ὃ ὄ ὅ ὆ ὇ Ὀ Ὁ Ὂ Ὃ Ὄ Ὅ ὎ ὏ ὐ ὑ ὒ ὓ ὔ ὕ ὖ ὗ ὘ Ὑ ὚ Ὓ ὜ Ὕ ὞ Ὗ ὠ ὡ ὢ ὣ ὤ ὥ ὦ ὧ Ὠ Ὡ Ὢ Ὣ Ὤ Ὥ Ὦ Ὧ ὰ ά ὲ έ ὴ ή ὶ ί ὸ ό ὺ ύ ὼ ώ ὾ ὿ ᾀ ᾁ ᾂ ᾃ ᾄ ᾅ ᾆ ᾇ ᾈ ᾉ ᾊ ᾋ ᾌ ᾍ ᾎ ᾏ ᾐ ᾑ ᾒ ᾓ ᾔ ᾕ ᾖ ᾗ ᾘ ᾙ ᾚ ᾛ ᾜ ᾝ ᾞ ᾟ ᾠ ᾡ ᾢ ᾣ ᾤ ᾥ ᾦ ᾧ ᾨ ᾩ ᾫ ᾬ ᾭ ᾮ ᾯ ᾰ ᾱ ᾲ ᾳ ᾴ ᾵ ᾶ ᾷ Ᾰ Ᾱ Ά ᾼ ᾽ ι ᾿ Ǽ								


diagram									
type	String 15 Type								
used by	complexType ArticlesType								
facets	<table border="1"> <tr> <td>Kind</td> <td>Value</td> </tr> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>maxLength</td> <td>15</td> </tr> <tr> <td>pattern</td> <td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú Û ä Ä ö Ö § ß)*</td> </tr> </table>	Kind	Value	minLength	1	maxLength	15	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ú Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	15								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9]) < = > \\? @ [A-Z] \\^ _ ' [a-z] ú Û ä Ä ö Ö § ß)*								
source	<code><xs:element name="sSuccessor_2" type="String_15_Type"/></code>								

diagram	
type	String 15 Type
used by	complexType ArticlesType
facets	Kind Value minLength 1 maxLength 15 pattern (&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\. , &#x2D; \\. / [0-9] : &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ú ü ä Ä ö Ö š ß)*
source	<code><xs:element name="sSuccessor_3" type="String_15_Type"/></code>

diagram	
---------	--

type	Supplier ID	
used by	complexType	HeaderType
facets	Kind	Value
	minLength	1
	maxLength	13
	pattern	([0-9])*
source	<xs:element name="sSupplierID" type="Supplier_ID"/>	

element **sSupplierShortName**

diagram		
type	String_20_Type	
used by	complexType	HeaderType
facets	Kind	Value
	minLength	1
	maxLength	20
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] :< = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ö ö ß ß)*
source	<xs:element name="sSupplierShortName" type="String_20_Type"/>	


element **sSupplierSynonym**

diagram		
type	String_2_Type	
used by	complexType	HeaderType
facets	Kind	Value
	minLength	1
	maxLength	2
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] :< = > \\? @ [A-Z] \\^ _ '[a-z] ü ä ö ö ß ß)*
source	<xs:element name="sSupplierSynonym" type="String_2_Type"/>	


element **sTeststring**

diagram		
type	Teststring_Type	
used by	complexType	HeaderType
facets	Kind	Value
	enumeration	1234567890abcdefghijklmnopqrstuvwxyzüöäÜÖÄÜß®€
source	<xs:element name="sTeststring" type="Teststring_Type"/>	

element **sText**

diagram									
type	String_40_Type								
used by	elements SparepartlistsType/Spareparts/ArticleRow SparepartlistsType/Spareparts/TextRow								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	40	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	40								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü ä ö Ö ß)*								
source	<code><xs:element name="sText" type="String_40_Type"/></code>								


element **sUrl**

diagram									
type	String_256_Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	256	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü ä ö Ö ß)*
Kind	Value								
minLength	1								
maxLength	256								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ [a-z] ü ä ö Ö ß)*								
source	<code><xs:element name="sUrl" type="String_256_Type"/></code>								

element **sUsageNode**

diagram									
type	String_512_Extended_Type								
used by	complexType ArticlesType								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>512</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	512	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	512								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀
  ∀-⋿])*								
source	<code><xs:element name="sUsageNode" type="String_512_Extended_Type"/></code>								

element **sWaregroup**

diagram	
---------	---

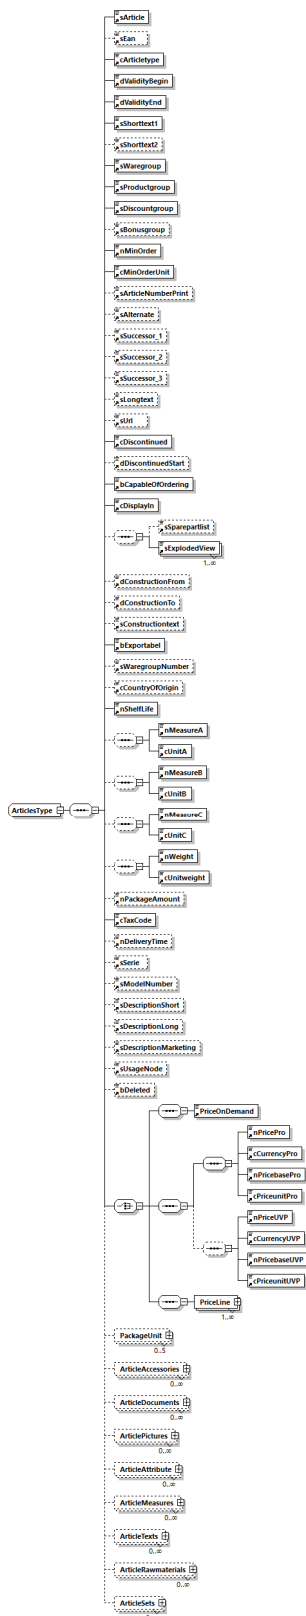
type	String_3_Type	
used by	complexTypees	ArticlesType HistoricProductsType WaregroupsType
facets	Kind	Value
	minLength	1
	maxLength	3
	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [[0-9]] < = > \\? @ [A-Z] \\^ _ ` [a-z] ü Û ä Ä ö Ö § ß)*
source	<xs:element name="sWaregroup" type="String_3_Type"/>	

element **sWaregroupNumber**

diagram		
type	Int_8_Trennzeichen	
used by	complexType	ArticlesType
facets	Kind	Value
	minInclusive	1
	maxInclusive	99999999
source	<xs:element name="sWaregroupNumber" type="Int_8_Trennzeichen"/>	

complexType ArticlesType

diagram



children	sArticle sEan cArticletype dValidityBegin dValidityEnd sShorttext1 sShorttext2 sWaregroup sProductgroup sDiscountgroup sBonusgroup nMinOrder cMinOrderUnit sArticleNumberPrint sAlternate sSuccessor_1 sSuccessor_2 sSuccessor_3 sLongtext sUrl cDiscontinued dDiscontinuedStart bCapableOfOrdering cDisplayIn sSparepartlist sExplodedView dConstructionFrom dConstructionTo sConstructiontext bExportabel sWaregroupNumber cCountryOfOrigin nShelfLife nMeasureA cUnitA nMeasureB cUnitB nMeasureC cUnitC nWeight cUnitweight nPackageAmount cTaxCode nDeliveryTime sSerie sModelNumber sDescriptionShort sDescriptionLong sDescriptionMarketing sUsageNode bDeleted PriceOnDemand nPricePro cCurrencyPro nPricebasePro cPriceunitPro nPriceUVP cCurrencyUVP nPricebaseUVP cPriceunitUVP PriceLine PackageUnit ArticleAccessories ArticleDocuments ArticlePictures ArticleAttribute ArticleMeasures ArticleTexts ArticleRawmaterials ArticleSets
used by	element SHK StammdatenType/Articles
source	<pre> <xs:complexType name="ArticlesType"> <xs:sequence> <xs:element ref="sArticle"/> <xs:element ref="sEan" minOccurs="0"/> <xs:element ref="cArticletype"/> <xs:element ref="dValidityBegin"/> <xs:element ref="dValidityEnd"/> <xs:element ref="sShorttext1"/> <xs:element ref="sShorttext2" minOccurs="0"/> <xs:element ref="sWaregroup"/> <xs:element ref="sProductgroup"/> <xs:element ref="sDiscountgroup"/> <xs:element ref="sBonusgroup" minOccurs="0"/> <xs:element ref="nMinOrder"/> <xs:element ref="cMinOrderUnit"/> <xs:element ref="sArticleNumberPrint" minOccurs="0"/> <xs:element ref="sAlternate" minOccurs="0"/> <xs:element ref="sSuccessor_1" minOccurs="0"/> <xs:element ref="sSuccessor_2" minOccurs="0"/> <xs:element ref="sSuccessor_3" minOccurs="0"/> <xs:element ref="sLongtext" minOccurs="0"/> <xs:element ref="sUrl" minOccurs="0"/> <xs:element ref="cDiscontinued"/> <xs:element ref="dDiscontinuedStart" minOccurs="0"/> <xs:element ref="bCapableOfOrdering"/> <xs:element ref="cDisplayIn"/> <xs:sequence minOccurs="0"> <xs:element ref="sSparepartlist" minOccurs="0"/> <xs:element ref="sExplodedView" maxOccurs="unbounded"/> </xs:sequence> <xs:element ref="dConstructionFrom" minOccurs="0"/> <xs:element ref="dConstructionTo" minOccurs="0"/> <xs:element ref="sConstructiontext" minOccurs="0"/> <xs:element ref="bExportabel"/> <xs:element ref="sWaregroupNumber" minOccurs="0"/> <xs:element ref="cCountryOfOrigin" minOccurs="0"/> <xs:element ref="nShelfLife"/> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureA"/> <xs:element ref="cUnitA"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureB"/> </pre>

```

    <xs:element ref="cUnitB"/>
  </xs:sequence>
  <xs:sequence minOccurs="0">
    <xs:element ref="nMeasureC"/>
    <xs:element ref="cUnitC"/>
  </xs:sequence>
  <xs:sequence minOccurs="0">
    <xs:element ref="nWeight"/>
    <xs:element ref="cUnitweight"/>
  </xs:sequence>
  <xs:element ref="nPackageAmount" minOccurs="0"/>
  <xs:element ref="cTaxCode"/>
  <xs:element ref="nDeliveryTime" minOccurs="0"/>
  <xs:element ref="sSerie" minOccurs="0"/>
  <xs:element ref="sModelNumber" minOccurs="0"/>
  <xs:element ref="sDescriptionShort" minOccurs="0"/>
  <xs:element ref="sDescriptionLong" minOccurs="0"/>
  <xs:element ref="sDescriptionMarketing" minOccurs="0"/>
  <xs:element ref="sUsageNode" minOccurs="0"/>
  <xs:element ref="bDeleted" minOccurs="0"/>
  <xs:choice>
    <xs:sequence>
      <xs:element ref="PriceOnDemand"/>
    </xs:sequence>
    <xs:sequence>
      <xs:sequence>
        <xs:element ref="nPricePro"/>
        <xs:element ref="cCurrencyPro"/>
        <xs:element ref="nPricebasePro"/>
        <xs:element ref="cPriceunitPro"/>
      </xs:sequence>
      <xs:sequence minOccurs="0">
        <xs:element ref="nPriceUVP"/>
        <xs:element ref="cCurrencyUVP"/>
        <xs:element ref="nPricebaseUVP"/>
        <xs:element ref="cPriceunitUVP"/>
      </xs:sequence>
    </xs:sequence>
    <xs:sequence>
      <xs:element name="PriceLine" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element ref="sDescription"/>
            <xs:element ref="nPrice"/>
            <xs:element ref="cCurrency"/>
            <xs:element ref="nPricebase"/>
            <xs:element ref="cPriceunit"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:choice>
  <xs:element name="PackageUnit" type="PackageUnitType" minOccurs="0"
maxOccurs="5"/>
  <xs:element name="ArticleAccessories" minOccurs="0" maxOccurs="unbounded">

```

```

<xs:complexType>
  <xs:sequence>
    <xs:element ref="sAccessory"/>
    <xs:element ref="nAmount"/>
  </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="ArticleDocuments" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="sDocument"/>
      <xs:element ref="cDocumentType"/>
      <xs:element ref="sDocDescription" minOccurs="0"/>
      <xs:element ref="nDocOrder" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticlePictures" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="sDocument"/>
      <xs:element ref="cPictureType"/>
      <xs:element ref="cPictureUse"/>
      <xs:element ref="bSubstitute"/>
      <xs:element ref="sDocDescription" minOccurs="0"/>
      <xs:element ref="nDocOrder" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleAttribute" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="cAttributesystem"/>
      <xs:element ref="sAttributeclass" minOccurs="0"/>
      <xs:element ref="sAttributename"/>
      <xs:element ref="sAttributevalue"/>
      <xs:element ref="sAttributevalue2" minOccurs="0"/>
      <xs:element ref="cAttributeunit" minOccurs="0"/>
      <xs:element ref="sAttributedescription" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleMeasures" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="cMeasuredeclaration"/>
      <xs:element ref="cUnit"/>
      <xs:element ref="nMeasure"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ArticleTexts" minOccurs="0" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="nTextRow"/>

```

```

        <xs:element ref="sDimensiontext"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="ArticleRawmaterials" minOccurs="0"
maxOccurs="unbounded">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="cMaterial"/>
        <xs:element ref="nWeighthbase"/>
        <xs:element ref="cWeightbaseUnit"/>
        <xs:element ref="nWeightrate"/>
        <xs:element ref="cWeightrateUnit"/>
        <xs:element name="nMaterialPrice" type="Decimal_15_2"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="ArticleSets" minOccurs="0" maxOccurs="unbounded">
    <xs:complexType>
      <xs:sequence>
        <xs:element ref="sAssignedArticle"/>
        <xs:element ref="nQuantity"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:sequence>
</xs:complexType>

```

element **ArticlesType/PriceLine**

diagram	
children	sDescription nPrice cCurrency nPricebase cPriceunit
source	<pre> <xs:element name="PriceLine" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDescription"/> <xs:element ref="nPrice"/> <xs:element ref="cCurrency"/> <xs:element ref="nPricebase"/> <xs:element ref="cPriceunit"/> </xs:sequence> </xs:complexType> </pre>

```
</xs:element>
```

element **ArticlesType/PackageUnit**

diagram	
type	PackageUnitType
children	cPackageKind nQuantity sEan nMeasureA cUnitA nMeasureB cUnitB nMeasureC cUnitC nWeight cUnitweight
source	<pre><xs:element name="PackageUnit" type="PackageUnitType" minOccurs="0" maxOccurs="5"/></pre>

element **ArticlesType/ArticleAccessories**

diagram	
children	sAccessory nAmount
source	<pre><xs:element name="ArticleAccessories" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sAccessory"/> <xs:element ref="nAmount"/> </xs:sequence> </xs:complexType> </xs:element></pre>

	<code></xs:element></code>
--	----------------------------------

element **ArticlesType/ArticleDocuments**

diagram	
children	sDocument cDocumentType sDocDescription nDocOrder
source	<pre> <xs:element name="ArticleDocuments" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cDocumentType"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticlePictures**

diagram	
children	sDocument cPictureType cPictureUse bSubstitute sDocDescription nDocOrder
source	<pre> <xs:element name="ArticlePictures" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cPictureType"/> <xs:element ref="cPictureUse"/> <xs:element ref="bSubstitute"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

```

</xs:sequence>
</xs:complexType>
</xs:element>

```

element ArticlesType/ArticleAttribute

diagram	
children	cAttributesystem sAttributeclass sAttributename sAttributevalue sAttributevalue2 cAttributeunit sAttributedescription
source	<pre> <xs:element name="ArticleAttribute" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="cAttributesystem"/> <xs:element ref="sAttributeclass" minOccurs="0"/> <xs:element ref="sAttributename"/> <xs:element ref="sAttributevalue"/> <xs:element ref="sAttributevalue2" minOccurs="0"/> <xs:element ref="cAttributeunit" minOccurs="0"/> <xs:element ref="sAttributedescription" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element ArticlesType/ArticleMeasures

diagram	
children	cMeasuredeclaration cUnit nMeasure
source	<pre> <xs:element name="ArticleMeasures" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> </pre>

	<pre> <xs:element ref="cMeasuredeclaration"/> <xs:element ref="cUnit"/> <xs:element ref="nMeasure"/> </xs:sequence> </xs:complexType> </xs:element> </pre>
--	--

element **ArticlesType/ArticleTexts**


diagram	
children	nTextRow sDimensiontext
source	<pre> <xs:element name="ArticleTexts" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nTextRow"/> <xs:element ref="sDimensiontext"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **ArticlesType/ArticleRawmaterials**


diagram	
children	cMaterial nWeigthbase cWeightbaseUnit nWeigthrate cWeightrateUnit nMaterialPrice
source	<pre> <xs:element name="ArticleRawmaterials" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="cMaterial"/> <xs:element ref="nWeigthbase"/> <xs:element ref="cWeightbaseUnit"/> <xs:element ref="nWeigthrate"/> <xs:element ref="cWeightrateUnit"/> <xs:element name="nMaterialPrice" type="Decimal_15_2"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

	<code></xs:element></code>
--	----------------------------------

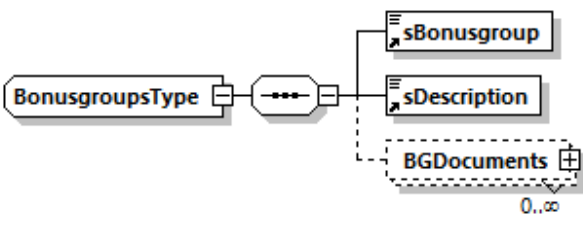
element **ArticlesType/ArticleRawmaterials/nMaterialPrice**

diagram									
type	Decimal 15 2								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<code><xs:element name="nMaterialPrice" type="Decimal_15_2"/></code>								

element **ArticlesType/ArticleSets**

diagram	
children	sAssignedArticle nQuantity
source	<pre> <xs:element name="ArticleSets" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sAssignedArticle"/> <xs:element ref="nQuantity"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

complexType **BonusgroupsType**

diagram	
children	sBonusgroup sDescription BGDocuments
used by	element SHK StammdatenType/Bonusgroups
source	<pre> <xs:complexType name="BonusgroupsType"> <xs:sequence> <xs:element ref="sBonusgroup"/> <xs:element ref="sDescription"/> <xs:element name="BGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/> </pre>

```
</xs:sequence>
</xs:complexType>
```

element **BonusgroupsType/BGDocuments**

diagram	
type	GroupDocumentType
children	sDocument cDocumentType cPictureType cPictureUse sDocDescription nDocOrder
source	<pre><xs:element name="BGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/></pre>

complexType **DiscountgroupsType**

diagram	
children	sDiscountgroup sDescription DGDDocuments
used by	element SHK_StammdatenType/Discountgroups
source	<pre><xs:complexType name="DiscountgroupsType"> <xs:sequence> <xs:element ref="sDiscountgroup"/> <xs:element ref="sDescription"/> <xs:element name="DGDDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></pre>

element **DiscountgroupsType/DGDocuments**

diagram	
type	GroupDocumentType
children	sDocument cDocumentType cPictureType cPictureUse sDocDescription nDocOrder
source	<pre><xs:element name="DGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/></pre>

complexType **HeaderType**

diagram	
children	sSupplierID sSupplierShortName sSupplierSynonym sCatalogID sCatalogDesc dValidityBegin dValidityEnd sMessageName bIncludesSystemRelevantPackagi... sLUCIDNumber sPackagingDisposalProvider sTeststring

element **HeaderType/bIncludesSystemRelevantPackagings**

element **HeaderType/sLUCIDNumber**

element **HeaderType/sPackagingDisposalProvider**

diagram		
type	String 80 Type	
facets	Kind	Value
	minLength	1
	maxLength	80

pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] : < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö § ß)*
source	<code><xs:element name="sPackagingDisposalProvider" type="String_80_Type"/></code>

complexType **HistoricProductsType**

diagram	
children	sHistoricProduct dConstructionFrom dConstructionTo sConstructiontext sShorttext1 sShorttext2 sEan sWaregroup sProductgroup sSparepartlist sExplodedView HistoricProductDocs HistoricProductPics
used by	element SHK_StammdatenType/HistoricProducts
source	<pre> <xs:complexType name="HistoricProductsType"> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> <xs:element ref="dConstructionTo" minOccurs="0"/> <xs:element ref="sConstructiontext" minOccurs="0"/> <xs:element ref="sShorttext1"/> <xs:element ref="sShorttext2" minOccurs="0"/> <xs:element ref="sEan" minOccurs="0"/> <xs:element ref="sWaregroup"/> <xs:element ref="sProductgroup"/> <xs:element ref="sSparepartlist"/> </pre>

	<pre> <xs:element ref="sExplodedView" maxOccurs="unbounded"/> <xs:element name="HistoricProductDocs" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element name="cDocumentType" type="Doctype_CL_Document_HP"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="HistoricProductPics" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cPictureType"/> <xs:element ref="cPictureUse"/> <xs:element ref="bSubstitute"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>
--	---

element **HistoricProductsType/HistoricProductDocs**

diagram	
children	sDocument cDocumentType sDocDescription nDocOrder
source	<pre> <xs:element name="HistoricProductDocs" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element name="cDocumentType" type="Doctype_CL_Document_HP"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **HistoricProductsType/HistoricProductDocs/cDocumentType**

diagram		
type	Doctype CL Document HP	
used by	element ArticlesType/ArticleDocuments	
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3B
	enumeration	3A
	enumeration	AN
	enumeration	DB
	enumeration	GG
	enumeration	IS
	enumeration	MA
	enumeration	PA
	enumeration	PP
	enumeration	ZL
	enumeration	SB
	enumeration	SF
	enumeration	PF
	enumeration	TI
	enumeration	TZ
	enumeration	VI
	enumeration	WA
	enumeration	LE
	enumeration	EL
	enumeration	UP
	enumeration	WL
	enumeration	VP
	enumeration	VM
	enumeration	VT
	enumeration	EP
	enumeration	BS
	enumeration	EX
	enumeration	KS
	enumeration	CE
	enumeration	VD
	enumeration	SS
	enumeration	PL
source	<xs:element name="cDocumentType" type="Doctype_CL_Document_HP"/>	

element **HistoricProductsType/HistoricProductPics**

diagram	
children	sDocument cPictureType cPictureUse bSubstitute sDocDescription nDocOrder
source	<pre> <xs:element name="HistoricProductPics" minOccurs="0" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="sDocument"/> <xs:element ref="cPictureType"/> <xs:element ref="cPictureUse"/> <xs:element ref="bSubstitute"/> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

complexType **LongtextType**


diagram	
children	sLongtext Longtexts
used by	element SHK StammdatenType/Longtext
source	<pre> <xs:complexType name="LongtextType"> <xs:sequence> <xs:element ref="sLongtext"/> <xs:element name="Longtexts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nTextRow"/> <xs:element name="sText" type="String_0_40_Type"/> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>

</xs:complexType>

element **LongtextType/Longtexts**

diagram	<pre> sequenceDiagram participant Longtexts as Longtexts Longtexts --> nTextRow as nTextRow Longtexts --> sText as sText </pre>
children	nTextRow sText
source	<pre> <xs:element name="Longtexts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nTextRow"/> <xs:element name="sText" type="String_0_40_Type"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **LongtextType/Longtexts/sText**

diagram									
type	String 0 40 Type								
used by	elements SparepartlistsType/Spareparts/ArticleRow SparepartlistsType/Spareparts/TextRow								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \(\) * \\+ ,&#x2D; \\. [0-9]) &#x3C; = > \\? &#x40; [A-Z] \\^ _ [a-z] ü û ä ö ő š ß)*</td></tr> </tbody> </table>	Kind	Value	minLength	0	maxLength	40	pattern	(! " # $ % & ' \(\) * \\+ ,- \\. [0-9]) < = > \\? @ [A-Z] \\^ _ [a-z] ü û ä ö ő š ß)*
Kind	Value								
minLength	0								
maxLength	40								
pattern	(! " # $ % & ' \(\) * \\+ ,- \\. [0-9]) < = > \\? @ [A-Z] \\^ _ [a-z] ü û ä ö ő š ß)*								
source	<xselement name="sText" type="String_0_40_Type"/>								

complexType **PackageUnitType**

diagram	
children	cPackageKind nQuantity sEan nMeasureA cUnitA nMeasureB cUnitB nMeasureC cUnitC nWeight cUnitweight
used by	element ArticlesType/PackageUnit
source	<pre> <xs:complexType name="PackageUnitType"> <xs:sequence> <xs:element ref="cPackageKind"/> <xs:element ref="nQuantity"/> <xs:element ref="sEan" minOccurs="0"/> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureA"/> <xs:element ref="cUnitA"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureB"/> <xs:element ref="cUnitB"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nMeasureC"/> <xs:element ref="cUnitC"/> </xs:sequence> <xs:sequence minOccurs="0"> <xs:element ref="nWeight"/> <xs:element ref="cUnitweight"/> </xs:sequence> </xs:sequence> </xs:complexType> </pre>

complexType **ProductgroupsType**

diagram	
children	sProductgroup sDescription PGDocuments
used by	element SHK StammdatenType/Productgroups
source	<pre> <xs:complexType name="ProductgroupsType"> <xs:sequence> <xs:element ref="sProductgroup"/> <xs:element ref="sDescription"/> <xs:element name="PGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre>

element **ProductgroupsType/PGDocuments**

diagram	
type	GroupDocumentType
children	sDocument cDocumentType cPictureType cPictureUse sDocDescription nDocOrder
source	<pre> <xs:element name="PGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/> </pre>

complexType SHK_StammdatenType

diagram					
children	Header Waregroups Productgroups Discountgroups Bonusgroups Articles Longtext HistoricProducts Sparepartlists				
used by	element SHK_Stammdaten				
attributes	Name version	Type xs:string	Use required	Default	Fixed 7.0
source	<pre> <xs:complexType name="SHK_StammdatenType"> <xs:sequence> <xs:element name="Header" type="HeaderType"/> <xs:element name="Waregroups" type="WaregroupsType" maxOccurs="unbounded"> <xs:key name="WGDocsID"> <xs:selector xpath="WGDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> <xs:element name="Productgroups" type="ProductgroupsType" maxOccurs="unbounded"> <xs:key name="PGDocsID"> <xs:selector xpath="PGDocuments"/> </xs:key> </xs:element> <xs:element name="Discountgroups" type="DiscountgroupsType" maxOccurs="unbounded"> <xs:key name="DGDocsID"> <xs:selector xpath="DGDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> <xs:element name="Bonusgroups" type="BonusgroupsType" maxOccurs="unbounded"> <xs:key name="BGDocsID"> <xs:selector xpath="BGDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> <xs:element name="Articles" type="ArticlesType" maxOccurs="unbounded"> <xs:key name="ArtDocsID"> <xs:selector xpath="ArtDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> <xs:element name="Longtext" type="LongtextType" maxOccurs="unbounded"> <xs:key name="LTDocsID"> <xs:selector xpath="LTDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> <xs:element name="HistoricProducts" type="HistoricProductsType" maxOccurs="unbounded"> <xs:key name="HPDocsID"> <xs:selector xpath="HPDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> <xs:element name="Sparepartlists" type="SparepartlistsType" maxOccurs="unbounded"> <xs:key name="SPDocsID"> <xs:selector xpath="SPDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </xs:sequence> </pre>				

```

        <xs:field xpath="sDocument"/>
      </xs:key>
    </xs:element>
    <xs:element name="Discountgroups" type="DiscountgroupsType"
maxOccurs="unbounded">
      <xs:key name="DGDocsID">
        <xs:selector xpath="DGDocuments"/>
        <xs:field xpath="sDocument"/>
      </xs:key>
    </xs:element>
    <xs:element name="Bonusgroups" type="BonusgroupsType" minOccurs="0"
maxOccurs="unbounded">
      <xs:key name="BGDocsID">
        <xs:selector xpath="BGDocuments"/>
        <xs:field xpath="sDocument"/>
      </xs:key>
    </xs:element>
    <xs:element name="Articles" type="ArticlesType" maxOccurs="unbounded">
      <xs:key name="ArticleAccessoriesID">
        <xs:selector xpath="ArticleAccessories"/>
        <xs:field xpath="sAccessory"/>
      </xs:key>
      <xs:key name="ArticleDocsID">
        <xs:selector xpath="ArticleDocuments"/>
        <xs:field xpath="sDocument"/>
        <xs:field xpath="cDocumentType"/>
      </xs:key>
      <xs:key name="ArticlePicID">
        <xs:selector xpath="ArticlePictures"/>
        <xs:field xpath="sDocument"/>
      </xs:key>
      <xs:key name="ArticleAttributeID">
        <xs:selector xpath="ArticleAttribute"/>
        <xs:field xpath="cAttributesystem"/>
        <xs:field xpath="sAttributename"/>
        <xs:field xpath="sAttributevalue"/>
      </xs:key>
      <xs:key name="ArticleMeasuresID">
        <xs:selector xpath="ArticleMeasures"/>
        <xs:field xpath="cMeasuredeclaration"/>
      </xs:key>
      <xs:key name="ArticleTextsID">
        <xs:selector xpath="ArticleTexts"/>
        <xs:field xpath="nTextRow"/>
      </xs:key>
      <xs:key name="ArticleRawmaterialID">
        <xs:selector xpath="ArticleRawmaterials"/>
        <xs:field xpath="cMaterial"/>
      </xs:key>
      <xs:key name="ArticleSetsID">
        <xs:selector xpath="ArticleSets"/>
        <xs:field xpath="sAssignedArticle"/>
      </xs:key>
      <xs:key name="ArticlePackageUnitID">
        <xs:selector xpath="PackageUnit"/>

```

```

        <xs:field xpath="cPackageKind"/>
        <xs:field xpath="nQuantity"/>
      </xs:key>
      <xs:key name="ArticlePricelineID">
        <xs:selector xpath="PriceLine"/>
        <xs:field xpath="sDescription"/>
      </xs:key>
    </xs:element>
    <xs:element name="Longtext" type="LongtextType" minOccurs="0"
maxOccurs="unbounded">
      <xs:key name="LongtextRowID">
        <xs:selector xpath="Longtexts"/>
        <xs:field xpath="nTextRow"/>
      </xs:key>
    </xs:element>
    <xs:element name="HistoricProducts" type="HistoricProductsType"
minOccurs="0" maxOccurs="unbounded">
      <xs:key name="HPDocs">
        <xs:selector xpath="HistoricProductDocs"/>
        <xs:field xpath="sDocument"/>
        <xs:field xpath="cDocumentType"/>
      </xs:key>
      <xs:key name="HPPics">
        <xs:selector xpath="HistoricProductPics"/>
        <xs:field xpath="sDocument"/>
      </xs:key>
    </xs:element>
    <xs:element name="Sparepartlists" type="SparepartlistsType" minOccurs="0"
maxOccurs="unbounded">
      <xs:key name="SparepartRowID">
        <xs:selector xpath="Spareparts"/>
        <xs:field xpath="nRow"/>
      </xs:key>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="version" type="xs:string" use="required" fixed="7.0"/>
</xs:complexType>

```

attribute **SHK_StammdatenType/@version**

type	xs:string
source	<xs:attribute name="version" type="xs:string" use="required" fixed="7.0"/>

element **SHK_StammdatenType/Header**

diagram	
type	HeaderType
children	sSupplierID sSupplierShortName sSupplierSynonym sCatalogID sCatalogDesc dValidityBegin dValidityEnd sMessageName bIncludesSystemRelevantPackagings sLUCIDNumber sPackagingDisposalProvider sTeststring
source	<code><xs:element name="Header" type="HeaderType"/></code>

element **SHK_StammdatenType/Waregroups**

diagram					
type	WaregroupsType				
children	sWaregroup sDescription WGDocuments				
identity constraints	key	Name	Refer	Selector	Field(s)
		WGDocsID		WGDocuments	sDocument
source	<pre> <xs:element name="Waregroups" type="WaregroupsType" maxOccurs="unbounded"> <xs:key name="WGDocsID"> <xs:selector xpath="WGDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/Productgroups**

diagram					
type	ProductgroupsType				
children	sProductgroup sDescription PGDocuments				
identity constraints	key	Name	Refer	Selector	Field(s)
		PGDocsID		PGDocuments	sDocument
source	<pre> <xs:element name="Productgroups" type="ProductgroupsType" maxOccurs="unbounded"> <xs:key name="PGDocsID"> <xs:selector xpath="PGDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/Discountgroups**

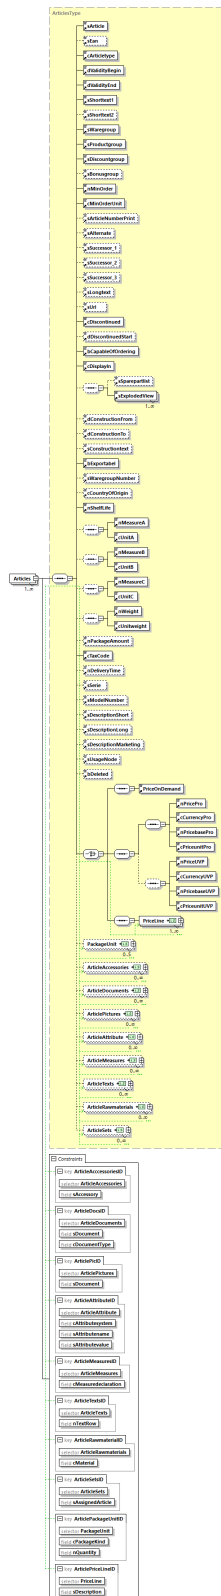
diagram					
type	DiscountgroupsType				
children	sDiscountgroup sDescription DGDDocuments				
identity constraints	key	Name	Refer	Selector	Field(s)
		DGDocsID		DGDDocuments	sDocument
source	<pre> <xs:element name="Discountgroups" type="DiscountgroupsType" maxOccurs="unbounded"> <xs:key name="DGDocsID"> <xs:selector xpath="DGDDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/Bonusgroups**

diagram					
type	BonusgroupsType				
children	sBonusgroup sDescription BGDocuments				
identity constraints	key	Name	Refer	Selector	Field(s)
		BGDocsID		BGDocuments	sDocument
source	<pre> <xs:element name="Bonusgroups" type="BonusgroupsType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="BGDocsID"> <xs:selector xpath="BGDocuments"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/Articles**

diagram



type	ArticlesType				
children	sArticle sEan cArticletype dValidityBegin dValidityEnd sShorttext1 sShorttext2 sWaregroup sProductgroup sDiscountgroup sBonusgroup nMinOrder cMinOrderUnit sArticleNumberPrint sAlternate sSuccessor 1 sSuccessor 2 sSuccessor 3 sLongtext sUrl cDiscontinued dDiscontinuedStart bCapableOfOrdering cDisplayIn sSparepartlist sExplodedView dConstructionFrom dConstructionTo sConstructiontext bExportabel sWaregroupNumber cCountryOfOrigin nShelfLife nMeasureA cUnitA nMeasureB cUnitB nMeasureC cUnitC nWeight cUnitweight nPackageAmount cTaxCode nDeliveryTime sSerie sModelNumber sDescriptionShort sDescriptionLong sDescriptionMarketing sUsageNode bDeleted PriceOnDemand nPricePro cCurrencyPro nPricebasePro cPriceunitPro nPriceUVP cCurrencyUVP nPricebaseUVP cPriceunitUVP PriceLine PackageUnit ArticleAccessories ArticleDocuments ArticlePictures ArticleAttribute ArticleMeasures ArticleTexts ArticleRawmaterials ArticleSets				
identity constraints		Name	Refer	Selector	Field(s)
	key	ArticleAccessoriesID		ArticleAccessories	sAccessory
	key	ArticleDocsID		ArticleDocuments	sDocument cDocumentType
	key	ArticlePicID		ArticlePictures	sDocument
	key	ArticleAttributeID		ArticleAttribute	cAttributesystem sAttributename sAttributevalue
	key	ArticleMeasuresID		ArticleMeasures	cMeasuredeclaration
	key	ArticleTextsID		ArticleTexts	nTextRow
	key	ArticleRawmaterialID		ArticleRawmaterials	cMaterial
	key	ArticleSetsID		ArticleSets	sAssignedArticle
	key	ArticlePackageUnitID		PackageUnit	cPackageKind nQuantity
	key	ArticlePriceLineID		PriceLine	sDescription
source	<pre><xs:element name="Articles" type="ArticlesType" maxOccurs="unbounded"> <xs:key name="ArticleAccessoriesID"> <xs:selector xpath="ArticleAccessories"/> <xs:field xpath="sAccessory"/> </xs:key> <xs:key name="ArticleDocsID"> <xs:selector xpath="ArticleDocuments"/> <xs:field xpath="sDocument"/> <xs:field xpath="cDocumentType"/> </xs:key> <xs:key name="ArticlePicID"> <xs:selector xpath="ArticlePictures"/> <xs:field xpath="sDocument"/> </xs:key> <xs:key name="ArticleAttributeID"> <xs:selector xpath="ArticleAttribute"/> <xs:field xpath="cAttributesystem"/> <xs:field xpath="sAttributename"/> <xs:field xpath="sAttributevalue"/> </xs:key> <xs:key name="ArticleMeasuresID"> <xs:selector xpath="ArticleMeasures"/> <xs:field xpath="cMeasuredeclaration"/> </xs:key> <xs:key name="ArticleTextsID"> <xs:selector xpath="ArticleTexts"/> <xs:field xpath="nTextRow"/> </xs:key> </xs:element></pre>				

```

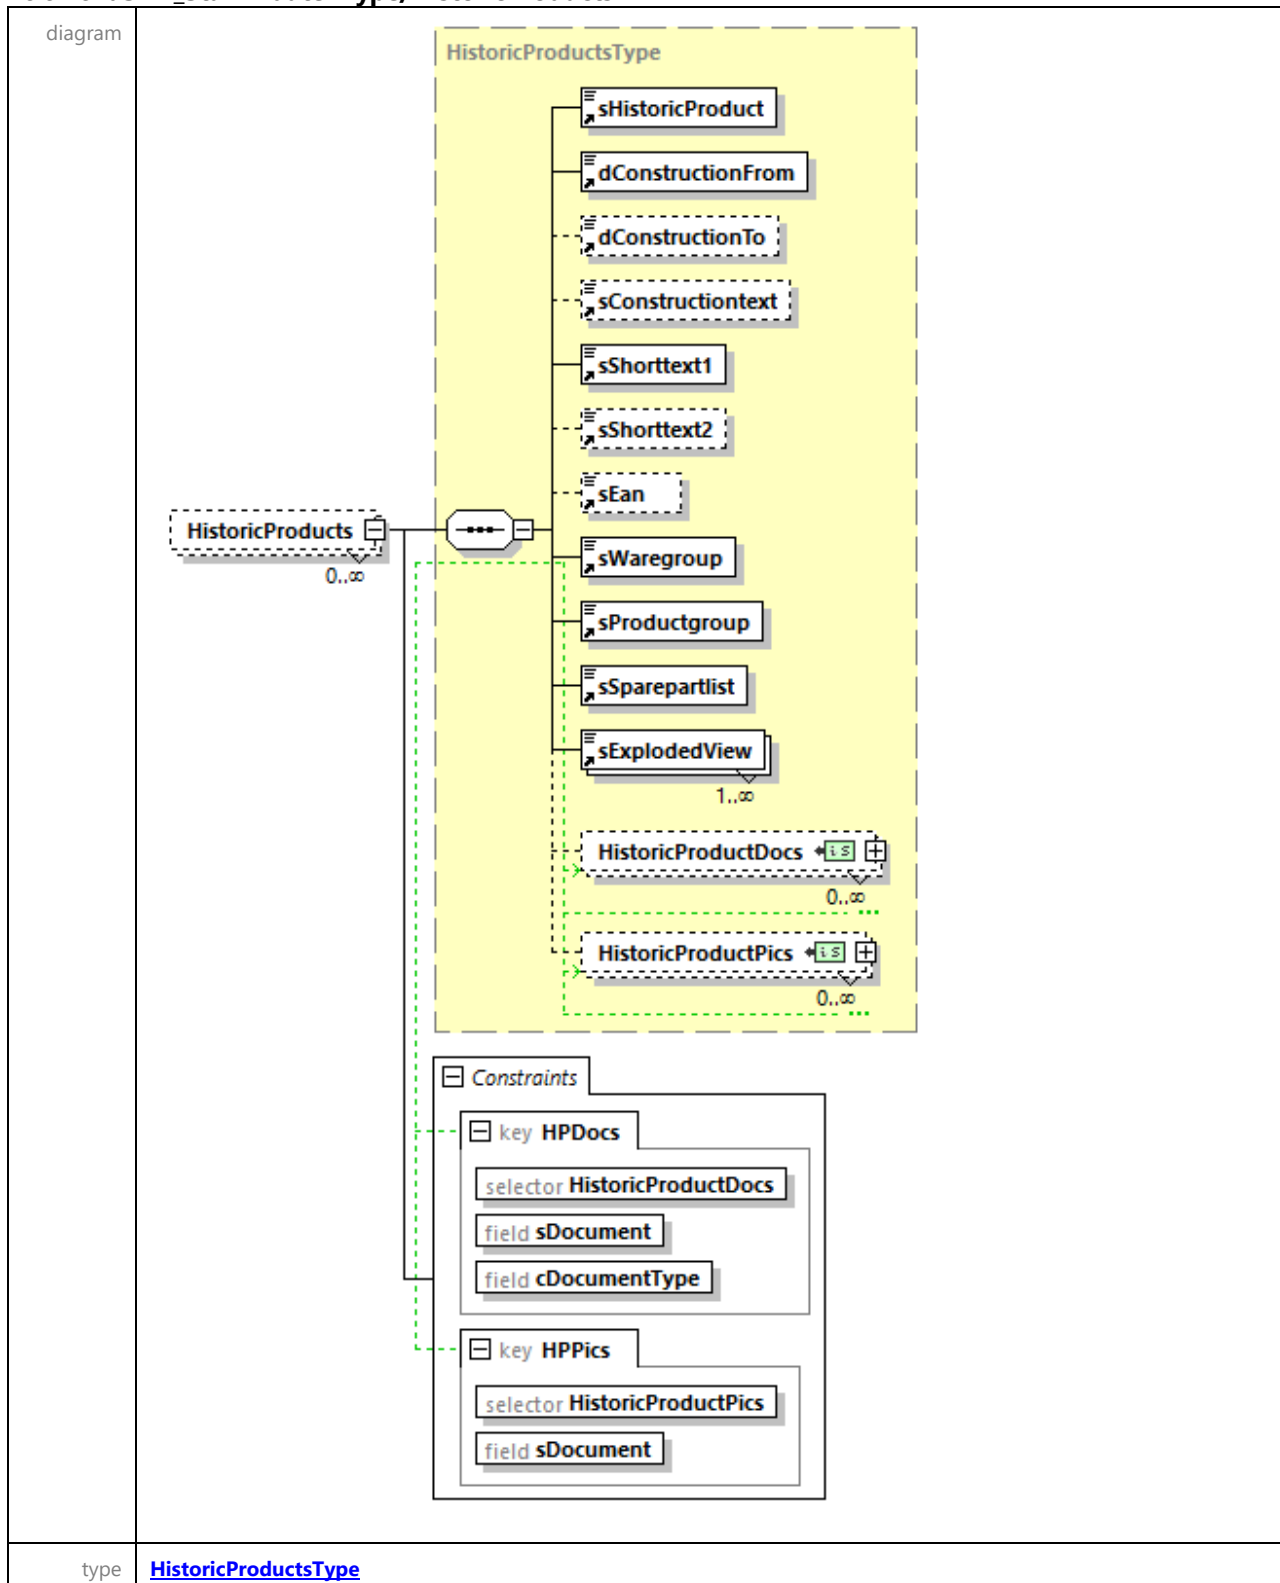
</xs:key>
<xs:key name="ArticleRawmaterialID">
  <xs:selector xpath="ArticleRawmaterials"/>
  <xs:field xpath="cMaterial"/>
</xs:key>
<xs:key name="ArticleSetsID">
  <xs:selector xpath="ArticleSets"/>
  <xs:field xpath="sAssignedArticle"/>
</xs:key>
<xs:key name="ArticlePackageUnitID">
  <xs:selector xpath="PackageUnit"/>
  <xs:field xpath="cPackageKind"/>
  <xs:field xpath="nQuantity"/>
</xs:key>
<xs:key name="ArticlePriceLineID">
  <xs:selector xpath="PriceLine"/>
  <xs:field xpath="sDescription"/>
</xs:key>
</xs:element>

```

element SHK_StammdatenType/Longtext

diagram					
type	LongtextType				
children	sLongtext Longtexts				
identity constraints	key	Name	Refer	Selector	Field(s)
		LongtextRowID		Longtexts	nTextRow
source	<pre> <xs:element name="Longtext" type="LongtextType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="LongtextRowID"> <xs:selector xpath="Longtexts"/> <xs:field xpath="nTextRow"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/HistoricProducts**



children	sHistoricProduct dConstructionFrom dConstructionTo sConstructiontext sShorttext1 sShorttext2 sEan sWaregroup sProductgroup sSparepartlist sExplodedView HistoricProductDocs HistoricProductPics				
identity constraints	key	Name	Refer	Selector	Field(s)
	key	HPDocs		HistoricProductDocs	sDocument cDocumentType
source	key	HPPics		HistoricProductPics	sDocument
	<pre> <xs:element name="HistoricProducts" type="HistoricProductsType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="HPDocs"> <xs:selector xpath="HistoricProductDocs"/> <xs:field xpath="sDocument"/> <xs:field xpath="cDocumentType"/> </xs:key> <xs:key name="HPPics"> <xs:selector xpath="HistoricProductPics"/> <xs:field xpath="sDocument"/> </xs:key> </xs:element> </pre>				

element **SHK_StammdatenType/Sparepartlists**

diagram					
type	SparepartlistsType				
children	sList Spareparts				
identity constraints	key	Name	Refer	Selector	Field(s)
	key	SparepartRowID		Spareparts	nRow
source	<pre> <xs:element name="Sparepartlists" type="SparepartlistsType" minOccurs="0" maxOccurs="unbounded"> <xs:key name="SparepartRowID"> <xs:selector xpath="Spareparts"/> <xs:field xpath="nRow"/> </xs:key> </xs:element> </pre>				

complexType **SparepartlistsType**

diagram	
children	sList Spareparts
used by	element SHK StammdatenType/Sparepartlists
source	<pre> <xs:complexType name="SparepartlistsType"> <xs:sequence> <xs:element ref="sList"/> <xs:element name="Spareparts" maxOccurs="unbounded"> <xs:complexType> <xs:sequence> <xs:element ref="nRow"/> <xs:choice> <xs:element name="TextRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition" minOccurs="0"/> <xs:element ref="sText"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="ArticleRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition"/> <xs:element ref="sPricegroup" minOccurs="0"/> <xs:element ref="sText"/> <xs:choice> <xs:element name="LinkedArticle"> <xs:complexType> <xs:sequence> <xs:element ref="sSparepart"/> </xs:sequence> </xs:complexType> </xs:element> <xs:element name="LinkedHistoricProduct"> <xs:complexType> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </xs:sequence> </xs:complexType> </pre>

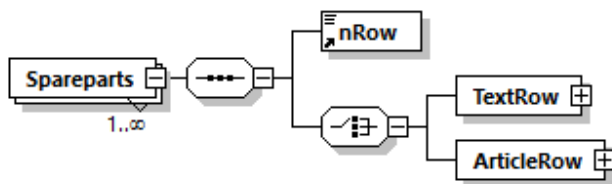
```

        </xs:choice>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:sequence>
</xs:complexType>

```

element `SparepartlistsType/Spareparts`

diagram



children

[nRow](#) [TextRow](#) [ArticleRow](#)

source

```

<xs:element name="Spareparts" maxOccurs="unbounded">
  <xs:complexType>
    <xs:sequence>
      <xs:element ref="nRow"/>
      <xs:choice>
        <xs:element name="TextRow">
          <xs:complexType>
            <xs:sequence>
              <xs:element ref="sPosition" minOccurs="0"/>
              <xs:element ref="sText"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="ArticleRow">
          <xs:complexType>
            <xs:sequence>
              <xs:element ref="sPosition"/>
              <xs:element ref="sPricegroup" minOccurs="0"/>
              <xs:element ref="sText"/>
              <xs:choice>
                <xs:element name="LinkedArticle">
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="sSparepart"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
                <xs:element name="LinkedHistoricProduct">
                  <xs:complexType>
                    <xs:sequence>
                      <xs:element ref="sHistoricProduct"/>
                      <xs:element ref="dConstructionFrom"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
              </xs:choice>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:choice>
    </xs:sequence>
  </xs:complexType>


```

```

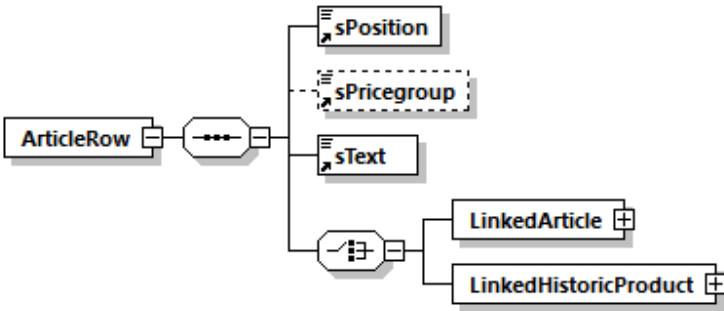
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:choice>
</xs:sequence>
</xs:complexType>
</xs:element>

```

element **SparepartlistsType/Spareparts/TextRow**

diagram	
children	sPosition sText
source	<pre> <xs:element name="TextRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition" minOccurs="0"/> <xs:element ref="sText"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **SparepartlistsType/Spareparts/ArticleRow**


diagram	
children	sPosition sPricegroup sText LinkedArticle LinkedHistoricProduct
source	<pre> <xs:element name="ArticleRow"> <xs:complexType> <xs:sequence> <xs:element ref="sPosition"/> <xs:element ref="sPricegroup" minOccurs="0"/> <xs:element ref="sText"/> <xs:choice> <xs:element name="LinkedArticle"> <xs:complexType> <xs:sequence> <xs:element ref="sSparepart"/> </xs:sequence> </pre>

	<pre> </xs:complexType> </xs:element> <xs:element name="LinkedHistoricProduct"> <xs:complexType> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> </xs:sequence> </xs:complexType> </xs:element> </xs:choice> </xs:sequence> </xs:complexType> </xs:element> </pre>
--	---

element **SparepartlistsType/Spareparts/ArticleRow/LinkedArticle**

diagram	
children	sSparepart
source	<pre> <xs:element name="LinkedArticle"> <xs:complexType> <xs:sequence> <xs:element ref="sSparepart"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

element **SparepartlistsType/Spareparts/ArticleRow/LinkedHistoricProduct**

diagram	
children	sHistoricProduct dConstructionFrom
source	<pre> <xs:element name="LinkedHistoricProduct"> <xs:complexType> <xs:sequence> <xs:element ref="sHistoricProduct"/> <xs:element ref="dConstructionFrom"/> </xs:sequence> </xs:complexType> </xs:element> </pre>

complexType WaregroupsType

diagram	
children	sWaregroup sDescription WGDocuments
used by	element SHK StammdatenType/Waregroups
source	<pre> <xs:complexType name="WaregroupsType"> <xs:sequence> <xs:element ref="sWaregroup"/> <xs:element ref="sDescription"/> <xs:element name="WGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre>

element WaregroupsType/WGDocuments

diagram	
type	GroupDocumentType
children	sDocument cDocumentType cPictureType cPictureUse sDocDescription nDocOrder
source	<pre> <xs:element name="WGDocuments" type="GroupDocumentType" minOccurs="0" maxOccurs="unbounded"/> </pre>

complexType **GroupDocumentType**


diagram	
children	sDocument cDocumentType cPictureType cPictureUse sDocDescription nDocOrder
used by	elements BonusgroupsType/BGDocuments DiscountgroupsType/DGDDocuments ProductgroupsType/PGDocuments WaregroupsType/WGDDocuments
source	<pre> <xs:complexType name="GroupDocumentType"> <xs:sequence> <xs:element ref="sDocument"/> <xs:choice> <xs:sequence> <xs:element name="cDocumentType" type="Doctype_CL_Document_Groups"/> </xs:sequence> <xs:sequence> <xs:element name="cPictureType" type="Doctype_CL_Picture_Groups"/> <xs:element ref="cPictureUse"/> </xs:sequence> </xs:choice> <xs:element ref="sDocDescription" minOccurs="0"/> <xs:element ref="nDocOrder" minOccurs="0"/> </xs:sequence> </xs:complexType> </pre>

element **GroupDocumentType/cDocumentType**

diagram																							
type	Doctype CL Document Groups																						
used by	element ArticlesType/ArticleDocuments																						
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr><td>enumeration</td><td>2D</td></tr> <tr><td>enumeration</td><td>2F</td></tr> <tr><td>enumeration</td><td>2S</td></tr> <tr><td>enumeration</td><td>3C</td></tr> <tr><td>enumeration</td><td>3B</td></tr> <tr><td>enumeration</td><td>3A</td></tr> <tr><td>enumeration</td><td>AN</td></tr> <tr><td>enumeration</td><td>DB</td></tr> <tr><td>enumeration</td><td>GG</td></tr> <tr><td>enumeration</td><td>IS</td></tr> </tbody> </table>	Kind	Value	enumeration	2D	enumeration	2F	enumeration	2S	enumeration	3C	enumeration	3B	enumeration	3A	enumeration	AN	enumeration	DB	enumeration	GG	enumeration	IS
Kind	Value																						
enumeration	2D																						
enumeration	2F																						
enumeration	2S																						
enumeration	3C																						
enumeration	3B																						
enumeration	3A																						
enumeration	AN																						
enumeration	DB																						
enumeration	GG																						
enumeration	IS																						

	enumeration	MA
	enumeration	PA
	enumeration	PP
	enumeration	ZL
	enumeration	SB
	enumeration	SF
	enumeration	PF
	enumeration	TI
	enumeration	TZ
	enumeration	VI
	enumeration	WA
	enumeration	LE
source	<xs:element name="cDocumentType" type="Doctype_CL_Document_Groups"/>	

element **GroupDocumentType/cPictureType**

diagram		
type	Doctype_CL_Picture_Groups	
used by	elements	ArticlesType/ArticlePictures HistoricProductsType/HistoricProductPics
facets	Kind	Value
	enumeration	B_
	enumeration	S_
	enumeration	U_
	enumeration	V_
	enumeration	MI
	enumeration	DT
	enumeration	LO
source	<xs:element name="cPictureType" type="Doctype_CL_Picture_Groups"/>	

simpleType **Articletype**

type	restriction of Erlaubte Zeichen	
used by	element	cArticletype
facets	Kind	Value
	pattern	(! " # $ % & ' \\(\\)* \\+ , - \\. /[0-9]] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
	enumeration	STD
	enumeration	ERA
	enumeration	ERB
	enumeration	ERC
	enumeration	VA
	enumeration	MA
	enumeration	DLS
	enumeration	PAK
	enumeration	SON
	enumeration	KAL
	enumeration	STG
	enumeration	PLA
	enumeration	GEB
source	<xs:simpleType name="Articletype"> <xs:restriction base="Erlaubte_Zeichen">	

```
<xs:enumeration value="STD"/>
<xs:enumeration value="ERA"/>
<xs:enumeration value="ERB"/>
<xs:enumeration value="ERC"/>
<xs:enumeration value="VA"/>
<xs:enumeration value="MA"/>
<xs:enumeration value="DLS"/>
<xs:enumeration value="PAK"/>
<xs:enumeration value="SON"/>
<xs:enumeration value="KAL"/>
<xs:enumeration value="STG"/>
<xs:enumeration value="PLA"/>
<xs:enumeration value="GEB"/>
</xs:restriction>
</xs:simpleType>
```

simpleType **Artikelnummer**

type	restriction of Erlaubte_Zeichen								
used by	element sArticle								
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü Ü ä Ä ö Ö § ß)*</td></tr> </tbody> </table>	Kind	Value	minLength	1	maxLength	15	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Ü ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	15								
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ ' [a-z] ü Ü ä Ä ö Ö § ß)*								
source	<pre><xs:simpleType name="Artikelnummer"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="15"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **Attributesystem_CL**

type	restriction of Erlaubte Zeichen																		
used by	element cAttributesystem																		
facets	<table border="0"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / /[0-9] &#x3C; = > &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> <tr> <td>enumeration</td><td>INDIV</td></tr> <tr> <td>enumeration</td><td>ETIM 6</td></tr> <tr> <td>enumeration</td><td>ETIM 7</td></tr> <tr> <td>enumeration</td><td>ETIM 8</td></tr> <tr> <td>enumeration</td><td>ZVSHK</td></tr> <tr> <td>enumeration</td><td>Gebühren</td></tr> <tr> <td>enumeration</td><td>Regulations</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / /[0-9] < = > @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*	enumeration	INDIV	enumeration	ETIM 6	enumeration	ETIM 7	enumeration	ETIM 8	enumeration	ZVSHK	enumeration	Gebühren	enumeration	Regulations
Kind	Value																		
pattern	(! " # $ % & ' \\(\\ * \\+ , - \\. / /[0-9] < = > @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*																		
enumeration	INDIV																		
enumeration	ETIM 6																		
enumeration	ETIM 7																		
enumeration	ETIM 8																		
enumeration	ZVSHK																		
enumeration	Gebühren																		
enumeration	Regulations																		
source	<pre><xs:simpleType name="Attributesystem_CL"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="INDIV"/> <xs:enumeration value="ETIM 6"/> <xs:enumeration value="ETIM 7"/></pre>																		

	<pre> <xs:enumeration value="ETIM 8"/> <xs:enumeration value="ZVSHK"/> <xs:enumeration value="Gebühren"/> <xs:enumeration value="Regulations"/> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType **Countries**

type	restriction of Erlaubte Zeichen	
used by	element	cCountryOfOrigin
facets	Kind	Value
	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9]] < = > \\? @ [A-Z] \\^ _ [a-z] ü Û ä Ä ö Ö § ß)*
	enumeration	AF
	enumeration	EG
	enumeration	AX
	enumeration	AL
	enumeration	DZ
	enumeration	AS
	enumeration	VI
	enumeration	AD
	enumeration	AO
	enumeration	AI
	enumeration	AQ
	enumeration	AG
	enumeration	GQ
	enumeration	AR
	enumeration	AM
	enumeration	AW
	enumeration	AC
	enumeration	AZ
	enumeration	ET
	enumeration	AU
	enumeration	BS
	enumeration	BH
	enumeration	BD
	enumeration	BB
	enumeration	BY
	enumeration	BE
	enumeration	BZ
	enumeration	BJ
	enumeration	BM
	enumeration	BT
	enumeration	BO
	enumeration	BQ
	enumeration	BA
	enumeration	BW
	enumeration	BV
	enumeration	BR
	enumeration	VG
	enumeration	IO
	enumeration	BN
	enumeration	BG
	enumeration	BF
	enumeration	BU
	enumeration	BI

enumeration	EA
enumeration	CL
enumeration	CN
enumeration	CP
enumeration	CK
enumeration	CR
enumeration	CI
enumeration	CW
enumeration	DK
enumeration	DE
enumeration	DG
enumeration	DM
enumeration	DO
enumeration	DJ
enumeration	EC
enumeration	SV
enumeration	ER
enumeration	EE
enumeration	CE
enumeration	EU
enumeration	FK
enumeration	FO
enumeration	FJ
enumeration	FI
enumeration	FR
enumeration	FX
enumeration	GF
enumeration	PF
enumeration	TF
enumeration	GA
enumeration	GM
enumeration	GE
enumeration	GH
enumeration	GI
enumeration	GD
enumeration	GR
enumeration	GL
enumeration	GP
enumeration	GU
enumeration	GT
enumeration	GG
enumeration	GN
enumeration	GW
enumeration	GY
enumeration	HT
enumeration	HM
enumeration	HN
enumeration	HK
enumeration	IN
enumeration	ID
enumeration	IM
enumeration	IQ
enumeration	IR
enumeration	IE
enumeration	IS
enumeration	IL
enumeration	IT
enumeration	JM
enumeration	JP
enumeration	YE

enumeration	JE
enumeration	JO
enumeration	YU
enumeration	KY
enumeration	KH
enumeration	CM
enumeration	CA
enumeration	IC
enumeration	CV
enumeration	KZ
enumeration	QA
enumeration	KE
enumeration	KG
enumeration	KI
enumeration	CC
enumeration	CO
enumeration	KM
enumeration	CD
enumeration	CG
enumeration	KP
enumeration	KR
enumeration	HR
enumeration	CU
enumeration	KW
enumeration	LA
enumeration	LS
enumeration	LV
enumeration	LB
enumeration	LR
enumeration	LY
enumeration	LI
enumeration	LT
enumeration	LU
enumeration	MO
enumeration	MG
enumeration	MW
enumeration	MY
enumeration	MV
enumeration	ML
enumeration	MT
enumeration	MA
enumeration	MH
enumeration	MQ
enumeration	MR
enumeration	MU
enumeration	YT
enumeration	MK
enumeration	MX
enumeration	FM
enumeration	MD
enumeration	MC
enumeration	MN
enumeration	ME
enumeration	MS
enumeration	MZ
enumeration	MM
enumeration	NA
enumeration	NR
enumeration	NP
enumeration	NC

enumeration	NZ
enumeration	NT
enumeration	NI
enumeration	NL
enumeration	AN
enumeration	NE
enumeration	NG
enumeration	NU
enumeration	MP
enumeration	NF
enumeration	NO
enumeration	OM
enumeration	AT
enumeration	TL
enumeration	PK
enumeration	PS
enumeration	PW
enumeration	PA
enumeration	PG
enumeration	PY
enumeration	PE
enumeration	PH
enumeration	PN
enumeration	PL
enumeration	PT
enumeration	PR
enumeration	RE
enumeration	RW
enumeration	RO
enumeration	RU
enumeration	SB
enumeration	BL
enumeration	MF
enumeration	ZM
enumeration	WS
enumeration	SM
enumeration	ST
enumeration	SA
enumeration	SE
enumeration	CH
enumeration	SN
enumeration	RS
enumeration	CS
enumeration	SC
enumeration	SL
enumeration	ZW
enumeration	SG
enumeration	SX
enumeration	SK
enumeration	SI
enumeration	SO
enumeration	ES
enumeration	LK
enumeration	SH
enumeration	KN
enumeration	LC
enumeration	PM
enumeration	VC
enumeration	ZA
enumeration	SD

	enumeration GS enumeration SS enumeration SR enumeration SJ enumeration SZ enumeration SY enumeration TJ enumeration TW enumeration TZ enumeration TH enumeration TG enumeration TK enumeration TO enumeration TT enumeration TA enumeration TD enumeration CZ enumeration CS enumeration TN enumeration TR enumeration TM enumeration TC enumeration TV enumeration SU enumeration UG enumeration UA enumeration HU enumeration UM enumeration UY enumeration UZ enumeration VU enumeration VA enumeration VE enumeration AE enumeration US enumeration GB enumeration VN enumeration WF enumeration CX enumeration EH enumeration ZR enumeration CF enumeration CY enumeration QU
source	<pre> <xs:simpleType name="Countries"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="AF"/> <xs:enumeration value="EG"/> <xs:enumeration value="AX"/> <xs:enumeration value="AL"/> <xs:enumeration value="DZ"/> <xs:enumeration value="AS"/> <xs:enumeration value="VI"/> <xs:enumeration value="AD"/> <xs:enumeration value="AO"/> <xs:enumeration value="AI"/> <xs:enumeration value="AQ"/> <xs:enumeration value="AG"/> </pre>

	<pre><xs:enumeration value="GQ"/> <xs:enumeration value="AR"/> <xs:enumeration value="AM"/> <xs:enumeration value="AW"/> <xs:enumeration value="AC"/> <xs:enumeration value="AZ"/> <xs:enumeration value="ET"/> <xs:enumeration value="AU"/> <xs:enumeration value="BS"/> <xs:enumeration value="BH"/> <xs:enumeration value="BD"/> <xs:enumeration value="BB"/> <xs:enumeration value="BY"/> <xs:enumeration value="BE"/> <xs:enumeration value="BZ"/> <xs:enumeration value="BJ"/> <xs:enumeration value="BM"/> <xs:enumeration value="BT"/> <xs:enumeration value="BO"/> <xs:enumeration value="BQ"/> <xs:enumeration value="BA"/> <xs:enumeration value="BW"/> <xs:enumeration value="BV"/> <xs:enumeration value="BR"/> <xs:enumeration value="VG"/> <xs:enumeration value="IO"/> <xs:enumeration value="BN"/> <xs:enumeration value="BG"/> <xs:enumeration value="BF"/> <xs:enumeration value="BU"/> <xs:enumeration value="BI"/> <xs:enumeration value="EA"/> <xs:enumeration value="CL"/> <xs:enumeration value="CN"/> <xs:enumeration value="CP"/> <xs:enumeration value="CK"/> <xs:enumeration value="CR"/> <xs:enumeration value="CI"/> <xs:enumeration value="CW"/> <xs:enumeration value="DK"/> <xs:enumeration value="DE"/> <xs:enumeration value="DG"/> <xs:enumeration value="DM"/> <xs:enumeration value="DO"/> <xs:enumeration value="DJ"/> <xs:enumeration value="EC"/> <xs:enumeration value="SV"/> <xs:enumeration value="ER"/> <xs:enumeration value="EE"/> <xs:enumeration value="CE"/> <xs:enumeration value="EU"/> <xs:enumeration value="FK"/> <xs:enumeration value="FO"/> <xs:enumeration value="FJ"/> <xs:enumeration value="FI"/></pre>
--	---

	<pre><xs:enumeration value="FR"/> <xs:enumeration value="FX"/> <xs:enumeration value="GF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TF"/> <xs:enumeration value="GA"/> <xs:enumeration value="GM"/> <xs:enumeration value="GE"/> <xs:enumeration value="GH"/> <xs:enumeration value="GI"/> <xs:enumeration value="GD"/> <xs:enumeration value="GR"/> <xs:enumeration value="GL"/> <xs:enumeration value="GP"/> <xs:enumeration value="GU"/> <xs:enumeration value="GT"/> <xs:enumeration value="GG"/> <xs:enumeration value="GN"/> <xs:enumeration value="GW"/> <xs:enumeration value="GY"/> <xs:enumeration value="HT"/> <xs:enumeration value="HM"/> <xs:enumeration value="HN"/> <xs:enumeration value="HK"/> <xs:enumeration value="IN"/> <xs:enumeration value="ID"/> <xs:enumeration value="IM"/> <xs:enumeration value="IQ"/> <xs:enumeration value="IR"/> <xs:enumeration value="IE"/> <xs:enumeration value="IS"/> <xs:enumeration value="IL"/> <xs:enumeration value="IT"/> <xs:enumeration value="JM"/> <xs:enumeration value="JP"/> <xs:enumeration value="YE"/> <xs:enumeration value="JE"/> <xs:enumeration value="JO"/> <xs:enumeration value="YU"/> <xs:enumeration value="KY"/> <xs:enumeration value="KH"/> <xs:enumeration value="CM"/> <xs:enumeration value="CA"/> <xs:enumeration value="IC"/> <xs:enumeration value="CV"/> <xs:enumeration value="KZ"/> <xs:enumeration value="QA"/> <xs:enumeration value="KE"/> <xs:enumeration value="KG"/> <xs:enumeration value="KI"/> <xs:enumeration value="CC"/> <xs:enumeration value="CO"/> <xs:enumeration value="KM"/> <xs:enumeration value="CD"/> <xs:enumeration value="CG"/></pre>
--	---

	<pre><xs:enumeration value="KP"/> <xs:enumeration value="KR"/> <xs:enumeration value="HR"/> <xs:enumeration value="CU"/> <xs:enumeration value="KW"/> <xs:enumeration value="LA"/> <xs:enumeration value="LS"/> <xs:enumeration value="LV"/> <xs:enumeration value="LB"/> <xs:enumeration value="LR"/> <xs:enumeration value="LY"/> <xs:enumeration value="LI"/> <xs:enumeration value="LT"/> <xs:enumeration value="LU"/> <xs:enumeration value="MO"/> <xs:enumeration value="MG"/> <xs:enumeration value="MW"/> <xs:enumeration value="MY"/> <xs:enumeration value="MV"/> <xs:enumeration value="ML"/> <xs:enumeration value="MT"/> <xs:enumeration value="MA"/> <xs:enumeration value="MH"/> <xs:enumeration value="MQ"/> <xs:enumeration value="MR"/> <xs:enumeration value="MU"/> <xs:enumeration value="YT"/> <xs:enumeration value="MK"/> <xs:enumeration value="MX"/> <xs:enumeration value="FM"/> <xs:enumeration value="MD"/> <xs:enumeration value="MC"/> <xs:enumeration value="MN"/> <xs:enumeration value="ME"/> <xs:enumeration value="MS"/> <xs:enumeration value="MZ"/> <xs:enumeration value="MM"/> <xs:enumeration value="NA"/> <xs:enumeration value="NR"/> <xs:enumeration value="NP"/> <xs:enumeration value="NC"/> <xs:enumeration value="NZ"/> <xs:enumeration value="NT"/> <xs:enumeration value="NI"/> <xs:enumeration value="NL"/> <xs:enumeration value="AN"/> <xs:enumeration value="NE"/> <xs:enumeration value="NG"/> <xs:enumeration value="NU"/> <xs:enumeration value="MP"/> <xs:enumeration value="NF"/> <xs:enumeration value="NO"/> <xs:enumeration value="OM"/> <xs:enumeration value="AT"/> <xs:enumeration value="TL"/></pre>
--	---

	<pre><xs:enumeration value="PK"/> <xs:enumeration value="PS"/> <xs:enumeration value="PW"/> <xs:enumeration value="PA"/> <xs:enumeration value="PG"/> <xs:enumeration value="PY"/> <xs:enumeration value="PE"/> <xs:enumeration value="PH"/> <xs:enumeration value="PN"/> <xs:enumeration value="PL"/> <xs:enumeration value="PT"/> <xs:enumeration value="PR"/> <xs:enumeration value="RE"/> <xs:enumeration value="RW"/> <xs:enumeration value="RO"/> <xs:enumeration value="RU"/> <xs:enumeration value="SB"/> <xs:enumeration value="BL"/> <xs:enumeration value="MF"/> <xs:enumeration value="ZM"/> <xs:enumeration value="WS"/> <xs:enumeration value="SM"/> <xs:enumeration value="ST"/> <xs:enumeration value="SA"/> <xs:enumeration value="SE"/> <xs:enumeration value="CH"/> <xs:enumeration value="SN"/> <xs:enumeration value="RS"/> <xs:enumeration value="CS"/> <xs:enumeration value="SC"/> <xs:enumeration value="SL"/> <xs:enumeration value="ZW"/> <xs:enumeration value="SG"/> <xs:enumeration value="SX"/> <xs:enumeration value="SK"/> <xs:enumeration value="SI"/> <xs:enumeration value="SO"/> <xs:enumeration value="ES"/> <xs:enumeration value="LK"/> <xs:enumeration value="SH"/> <xs:enumeration value="KN"/> <xs:enumeration value="LC"/> <xs:enumeration value="PM"/> <xs:enumeration value="VC"/> <xs:enumeration value="ZA"/> <xs:enumeration value="SD"/> <xs:enumeration value="GS"/> <xs:enumeration value="SS"/> <xs:enumeration value="SR"/> <xs:enumeration value="SJ"/> <xs:enumeration value="SZ"/> <xs:enumeration value="SY"/> <xs:enumeration value="TJ"/> <xs:enumeration value="TW"/> <xs:enumeration value="TZ"/></pre>
--	---

```
<xs:enumeration value="TH"/>
<xs:enumeration value="TG"/>
<xs:enumeration value="TK"/>
<xs:enumeration value="TO"/>
<xs:enumeration value="TT"/>
<xs:enumeration value="TA"/>
<xs:enumeration value="TD"/>
<xs:enumeration value="CZ"/>
<xs:enumeration value="CS"/>
<xs:enumeration value="TN"/>
<xs:enumeration value="TR"/>
<xs:enumeration value="TM"/>
<xs:enumeration value="TC"/>
<xs:enumeration value="TV"/>
<xs:enumeration value="SU"/>
<xs:enumeration value="UG"/>
<xs:enumeration value="UA"/>
<xs:enumeration value="HU"/>
<xs:enumeration value="UM"/>
<xs:enumeration value="UY"/>
<xs:enumeration value="UZ"/>
<xs:enumeration value="VU"/>
<xs:enumeration value="VA"/>
<xs:enumeration value="VE"/>
<xs:enumeration value="AE"/>
<xs:enumeration value="US"/>
<xs:enumeration value="GB"/>
<xs:enumeration value="VN"/>
<xs:enumeration value="WF"/>
<xs:enumeration value="CX"/>
<xs:enumeration value="EH"/>
<xs:enumeration value="ZR"/>
<xs:enumeration value="CF"/>
<xs:enumeration value="CY"/>
<xs:enumeration value="QU"/>
</xs:restriction>
</xs:simpleType>
```

simpleType **Currency_CL**

type	restriction of Erlaubte_Zeichen
used by	elements cCurrency cCurrencyPro cCurrencyUVP
facets	Kind Value pattern <code>([0-9; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ _ &#x2D; \\. / /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ ' [a-z] ü Û ä Ä ö Ö ß)*</code> enumeration EUR
source	<pre><xs:simpleType name="Currency_CL"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="EUR"/> </xs:restriction> </xs:simpleType></pre>

simpleType **DateFormat**

type	restriction of xs:string				
used by	elements dConstructionFrom dConstructionTo dDiscontinuedStart dValidityBegin dValidityEnd				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))))</td></tr> </table>	Kind	Value	pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))))
Kind	Value				
pattern	((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))))				
source	<pre><xs:simpleType name="DateFormat"> <xs:restriction base="xs:string"> <xs:pattern value="((([0][1-9]) ([12][0-9]) (3[01]))((0[13578]) (1[02]))(19 20)[0-9]{2}) ((([0][1-9]) ([12][0-9]) 30)(0[469] 11)(19 20)[0-9]{2}) ((([0][1-9]) ([1][0-9]) 2[0-8])02((19) (20))[0-9]{2}) ((([0][1-9]) ([12][0-9]) 02(2000 (19 20)(04 08 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96))))"/> </xs:restriction> </xs:simpleType></pre>				

simpleType **Decimal_15_2**

type	restriction of xs:decimal								
used by	elements ArticlesType/ArticleRawmaterials/nMaterialPrice nPrice nPricePro nPriceUVP								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0</td></tr> <tr> <td>totalDigits</td><td>15</td></tr> <tr> <td>fractionDigits</td><td>2</td></tr> </table>	Kind	Value	minInclusive	0.0	totalDigits	15	fractionDigits	2
Kind	Value								
minInclusive	0.0								
totalDigits	15								
fractionDigits	2								
source	<pre><xs:simpleType name="Decimal_15_2"> <xs:restriction base="xs:decimal"> <xs:totalDigits value="15"/> <xs:fractionDigits value="2"/> <xs:minInclusive value="0.0"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **Decimal_16_3**

type	restriction of xs:decimal								
used by	elements nAmount nMeasure nMeasureA nMeasureB nMeasureC nMinOrder nQuantity nWeight								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.001</td></tr> <tr> <td>totalDigits</td><td>16</td></tr> <tr> <td>fractionDigits</td><td>3</td></tr> </table>	Kind	Value	minInclusive	0.001	totalDigits	16	fractionDigits	3
Kind	Value								
minInclusive	0.001								
totalDigits	16								
fractionDigits	3								
source	<pre><xs:simpleType name="Decimal_16_3"> <xs:restriction base="xs:decimal"> <xs:totalDigits value="16"/> <xs:fractionDigits value="3"/> <xs:minInclusive value="0.001"/> </xs:restriction> </xs:simpleType></pre>								

	<pre> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType **Decimal_18_4**

type	restriction of xs:decimal								
used by	elements nWeigthbase nWeigthtrate								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>0.0001</td></tr> <tr> <td>totalDigits</td><td>18</td></tr> <tr> <td>fractionDigits</td><td>4</td></tr> </table>	Kind	Value	minInclusive	0.0001	totalDigits	18	fractionDigits	4
Kind	Value								
minInclusive	0.0001								
totalDigits	18								
fractionDigits	4								
source	<pre> <xs:simpleType name="Decimal_18_4"> <xs:restriction base="xs:decimal"> <xs:totalDigits value="18"/> <xs:fractionDigits value="4"/> <xs:minInclusive value="0.0001"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **Discontinued_CL**

type	restriction of Erlaubte Zeichen										
used by	element cDiscontinued										
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*</td></tr> <tr> <td>enumeration</td><td>Yes</td></tr> <tr> <td>enumeration</td><td>Yes-Successor</td></tr> <tr> <td>enumeration</td><td>No</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*	enumeration	Yes	enumeration	Yes-Successor	enumeration	No
Kind	Value										
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*										
enumeration	Yes										
enumeration	Yes-Successor										
enumeration	No										
source	<pre> <xs:simpleType name="Discontinued_CL"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="Yes"/> <xs:enumeration value="Yes-Successor"/> <xs:enumeration value="No"/> </xs:restriction> </xs:simpleType> </pre>										

simpleType **Display_CL**

type	restriction of Erlaubte Zeichen												
used by	element cDisplayIn												
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*</td></tr> <tr> <td>enumeration</td><td>3</td></tr> <tr> <td>enumeration</td><td>0</td></tr> <tr> <td>enumeration</td><td>1</td></tr> <tr> <td>enumeration</td><td>2</td></tr> </table>	Kind	Value	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*	enumeration	3	enumeration	0	enumeration	1	enumeration	2
Kind	Value												
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*												
enumeration	3												
enumeration	0												
enumeration	1												
enumeration	2												
source	<pre> <xs:simpleType name="Display_CL"> </pre>												

	<pre> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="3"/> <xs:enumeration value="0"/> <xs:enumeration value="1"/> <xs:enumeration value="2"/> </xs:restriction> </xs:simpleType> </pre>
--	--

simpleType **Doctype_CL_Document_Article**

type	restriction of xs:string	
used by	element	cDocumentType
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3A
	enumeration	DB
	enumeration	GG
	enumeration	IS
	enumeration	MA
	enumeration	PA
	enumeration	PP
	enumeration	ZL
	enumeration	SB
	enumeration	SF
	enumeration	PF
	enumeration	TZ
	enumeration	VI
	enumeration	WA
	enumeration	LE
	enumeration	EL
	enumeration	UP
	enumeration	WL
	enumeration	VM
	enumeration	VT
	enumeration	EP
	enumeration	BS
	enumeration	EX
	enumeration	KS
	enumeration	CE
	enumeration	VD
	enumeration	SS
	enumeration	PL
source	<pre> <xs:simpleType name="Doctype_CL_Document_Article"> <xs:restriction base="xs:string"> <xs:enumeration value="2D"/> <xs:enumeration value="2F"/> <xs:enumeration value="2S"/> <xs:enumeration value="3C"/> <xs:enumeration value="3A"/> <xs:enumeration value="DB"/> <xs:enumeration value="GG"/> <xs:enumeration value="IS"/> </xs:restriction> </xs:simpleType> </pre>	

	<pre> <xs:enumeration value="MA"/> <xs:enumeration value="PA"/> <xs:enumeration value="PP"/> <xs:enumeration value="ZL"/> <xs:enumeration value="SB"/> <xs:enumeration value="SF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TZ"/> <xs:enumeration value="VI"/> <xs:enumeration value="WA"/> <xs:enumeration value="LE"/> <xs:enumeration value="EL"/> <xs:enumeration value="UP"/> <xs:enumeration value="WL"/> <xs:enumeration value="VM"/> <xs:enumeration value="VT"/> <xs:enumeration value="EP"/> <xs:enumeration value="BS"/> <xs:enumeration value="EX"/> <xs:enumeration value="KS"/> <xs:enumeration value="CE"/> <xs:enumeration value="VD"/> <xs:enumeration value="SS"/> <xs:enumeration value="PL"/> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType Doctype_CL_Document_Groups

type	restriction of xs:string	
used by	element	GroupDocumentType/cDocumentType
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3B
	enumeration	3A
	enumeration	AN
	enumeration	DB
	enumeration	GG
	enumeration	IS
	enumeration	MA
	enumeration	PA
	enumeration	PP
	enumeration	ZL
	enumeration	SB
	enumeration	SF
	enumeration	PF
	enumeration	TI
	enumeration	TZ
	enumeration	VI
	enumeration	WA
	enumeration	LE

source	<pre> <xs:simpleType name="Doctype_CL_Document_Groups"> <xs:restriction base="xs:string"> <xs:enumeration value="2D"/> <xs:enumeration value="2F"/> <xs:enumeration value="2S"/> <xs:enumeration value="3C"/> <xs:enumeration value="3B"/> <xs:enumeration value="3A"/> <xs:enumeration value="AN"/> <xs:enumeration value="DB"/> <xs:enumeration value="GG"/> <xs:enumeration value="IS"/> <xs:enumeration value="MA"/> <xs:enumeration value="PA"/> <xs:enumeration value="PP"/> <xs:enumeration value="ZL"/> <xs:enumeration value="SB"/> <xs:enumeration value="SF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TI"/> <xs:enumeration value="TZ"/> <xs:enumeration value="VI"/> <xs:enumeration value="WA"/> <xs:enumeration value="LE"/> </xs:restriction> </xs:simpleType> </pre>
--------	---

simpleType **Doctype_CL_Document_HP**

type	restriction of xs:string	
used by	element	HistoricProductsType/HistoricProductDocs/cDocumentType
facets	Kind	Value
	enumeration	2D
	enumeration	2F
	enumeration	2S
	enumeration	3C
	enumeration	3B
	enumeration	3A
	enumeration	AN
	enumeration	DB
	enumeration	GG
	enumeration	IS
	enumeration	MA
	enumeration	PA
	enumeration	PP
	enumeration	ZL
	enumeration	SB
	enumeration	SF
	enumeration	PF
	enumeration	TI
	enumeration	TZ
	enumeration	VI
	enumeration	WA
	enumeration	LE
	enumeration	EL

	enumeration UP enumeration WL enumeration VP enumeration VM enumeration VT enumeration EP enumeration BS enumeration EX enumeration KS enumeration CE enumeration VD enumeration SS enumeration PL
source	<pre> <xs:simpleType name="Doctype_CL_Document_HP"> <xs:restriction base="xs:string"> <xs:enumeration value="2D"/> <xs:enumeration value="2F"/> <xs:enumeration value="2S"/> <xs:enumeration value="3C"/> <xs:enumeration value="3B"/> <xs:enumeration value="3A"/> <xs:enumeration value="AN"/> <xs:enumeration value="DB"/> <xs:enumeration value="GG"/> <xs:enumeration value="IS"/> <xs:enumeration value="MA"/> <xs:enumeration value="PA"/> <xs:enumeration value="PP"/> <xs:enumeration value="ZL"/> <xs:enumeration value="SB"/> <xs:enumeration value="SF"/> <xs:enumeration value="PF"/> <xs:enumeration value="TI"/> <xs:enumeration value="TZ"/> <xs:enumeration value="VI"/> <xs:enumeration value="WA"/> <xs:enumeration value="LE"/> <xs:enumeration value="EL"/> <xs:enumeration value="UP"/> <xs:enumeration value="WL"/> <xs:enumeration value="VP"/> <xs:enumeration value="VM"/> <xs:enumeration value="VT"/> <xs:enumeration value="EP"/> <xs:enumeration value="BS"/> <xs:enumeration value="EX"/> <xs:enumeration value="KS"/> <xs:enumeration value="CE"/> <xs:enumeration value="VD"/> <xs:enumeration value="SS"/> <xs:enumeration value="PL"/> </xs:restriction> </xs:simpleType> </pre>

simpleType **Doctype_CL_Picture**

type	restriction of xs:string																				
used by	element cPictureType																				
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr><td>enumeration</td><td>B_</td></tr> <tr><td>enumeration</td><td>S_</td></tr> <tr><td>enumeration</td><td>U_</td></tr> <tr><td>enumeration</td><td>V_</td></tr> <tr><td>enumeration</td><td>MI</td></tr> <tr><td>enumeration</td><td>DT</td></tr> <tr><td>enumeration</td><td>LO</td></tr> <tr><td>enumeration</td><td>KB</td></tr> <tr><td>enumeration</td><td>BF</td></tr> </tbody> </table>	Kind	Value	enumeration	B_	enumeration	S_	enumeration	U_	enumeration	V_	enumeration	MI	enumeration	DT	enumeration	LO	enumeration	KB	enumeration	BF
Kind	Value																				
enumeration	B_																				
enumeration	S_																				
enumeration	U_																				
enumeration	V_																				
enumeration	MI																				
enumeration	DT																				
enumeration	LO																				
enumeration	KB																				
enumeration	BF																				
source	<pre> <xs:simpleType name="Doctype_CL_Picture"> <xs:restriction base="xs:string"> <xs:enumeration value="B_"/> <xs:enumeration value="S_"/> <xs:enumeration value="U_"/> <xs:enumeration value="V_"/> <xs:enumeration value="MI"/> <xs:enumeration value="DT"/> <xs:enumeration value="LO"/> <xs:enumeration value="KB"/> <xs:enumeration value="BF"/> </xs:restriction> </xs:simpleType> </pre>																				

simpleType **Doctype_CL_Picture_Groups**

type	restriction of xs:string																
used by	element GroupDocumentType/cPictureType																
facets	<table> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr><td>enumeration</td><td>B_</td></tr> <tr><td>enumeration</td><td>S_</td></tr> <tr><td>enumeration</td><td>U_</td></tr> <tr><td>enumeration</td><td>V_</td></tr> <tr><td>enumeration</td><td>MI</td></tr> <tr><td>enumeration</td><td>DT</td></tr> <tr><td>enumeration</td><td>LO</td></tr> </tbody> </table>	Kind	Value	enumeration	B_	enumeration	S_	enumeration	U_	enumeration	V_	enumeration	MI	enumeration	DT	enumeration	LO
Kind	Value																
enumeration	B_																
enumeration	S_																
enumeration	U_																
enumeration	V_																
enumeration	MI																
enumeration	DT																
enumeration	LO																
source	<pre> <xs:simpleType name="Doctype_CL_Picture_Groups"> <xs:restriction base="xs:string"> <xs:enumeration value="B_"/> <xs:enumeration value="S_"/> <xs:enumeration value="U_"/> <xs:enumeration value="V_"/> <xs:enumeration value="MI"/> <xs:enumeration value="DT"/> <xs:enumeration value="LO"/> </xs:restriction> </xs:simpleType> </pre>																

type	restriction of xs:string	
used by	simpleTypes	Articletype Artikelnummer Attributesystem CL Countries Currency CL Discontinued CL Display CL PictureUse PriceOnDemand Type Rawmaterial CL String 0 40 Type String 10 Type String 14 Type String 15 Type String 20 Type String 256 Type String 2 Type String 35 Type String 3 Type String 4 Type String 5 Type String 80 Type String 8 Type TaxCode CL Verpackungsart
facets	Kind pattern	Value (! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] : < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*
source	<pre><xs:simpleType name="Erlaubte_Zeichen"> <xs:restriction base="xs:string"> <xs:pattern value="(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] : &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)"*/> </xs:restriction> </xs:simpleType></pre>	

type	restriction of xs:string				
used by	simpleTypes String 10000 Extended Type String 256 Extended Type String 512 Extended Type String 60 Extended Type				
facets	<table border="1"> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>pattern</td><td> <code>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;]&#x2300;&#x000A;&#x000D;[&#x2200;-&#x22FF;])*</code> </td></tr> </table>	Kind	Value	pattern	<code>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;]&#x2300;&#x000A;&#x000D;[&#x2200;-&#x22FF;])*</code>
Kind	Value				
pattern	<code>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;]&#x2300;&#x000A;&#x000D;[&#x2200;-&#x22FF;])*</code>				
source	<pre><xs:simpleType name="Erlaubte_Zeichen_Extended"> <xs:restriction base="xs:string"> <xs:pattern value="([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;]&#x2300; &#x000A; &#x000D; &#x2200;-&#x22FF;])*"/> </xs:restriction> </xs:simpleType></pre>				

type	restriction of xs:integer						
used by	element nDocOrder						
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>9999999999</td></tr> </tbody> </table>	Kind	Value	minInclusive	1	maxInclusive	9999999999
Kind	Value						
minInclusive	1						
maxInclusive	9999999999						
source	<pre><xs:simpleType name="Int_10_Trennzeichen"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="9999999999"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **Int_1_99_Type**

type	restriction of xs:integer						
used by	element nShelfLife						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99
Kind	Value						
minInclusive	1						
maxInclusive	99						
source	<pre><xs:simpleType name="Int_1_99_Type"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **Int_2_Trennzeichen**

type	restriction of xs:integer						
used by	element nTextRow						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99
Kind	Value						
minInclusive	1						
maxInclusive	99						
source	<pre><xs:simpleType name="Int_2_Trennzeichen"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **Int_3_Type**

type	restriction of xs:integer				
used by	element nRow				
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>([0-9]{1,3})</td></tr> </table>	Kind	Value	pattern	([0-9]{1,3})
Kind	Value				
pattern	([0-9]{1,3})				
source	<pre><xs:simpleType name="Int_3_Type"> <xs:restriction base="xs:integer"> <xs:pattern value="([0-9]{1,3})"/> </xs:restriction> </xs:simpleType></pre>				

simpleType **Int_8_Trennzeichen**

type	restriction of xs:integer						
used by	elements nDeliveryTime nPackageAmount sWaregroupNumber						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>99999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	99999999
Kind	Value						
minInclusive	1						
maxInclusive	99999999						

source	<pre><xs:simpleType name="Int_8_Trennzeichen"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="99999999"/> </xs:restriction> </xs:simpleType></pre>
--------	---

simpleType **Int_9_Trennzeichen**

type	restriction of xs:integer						
used by	elements nPricebase nPricebasePro nPricebaseUVP						
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minInclusive</td><td>1</td></tr> <tr> <td>maxInclusive</td><td>999999999</td></tr> </table>	Kind	Value	minInclusive	1	maxInclusive	999999999
Kind	Value						
minInclusive	1						
maxInclusive	999999999						
source	<pre><xs:simpleType name="Int_9_Trennzeichen"> <xs:restriction base="xs:integer"> <xs:minInclusive value="1"/> <xs:maxInclusive value="999999999"/> </xs:restriction> </xs:simpleType></pre>						

simpleType **LengthUnit_CL**

type	restriction of xs:string										
used by	elements cUnitA cUnitB cUnitC										
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>enumeration</td><td>KTM</td></tr> <tr> <td>enumeration</td><td>MTR</td></tr> <tr> <td>enumeration</td><td>MMT</td></tr> <tr> <td>enumeration</td><td>CMT</td></tr> </table>	Kind	Value	enumeration	KTM	enumeration	MTR	enumeration	MMT	enumeration	CMT
Kind	Value										
enumeration	KTM										
enumeration	MTR										
enumeration	MMT										
enumeration	CMT										
source	<pre><xs:simpleType name="LengthUnit_CL"> <xs:restriction base="xs:string"> <xs:enumeration value="KTM"/> <xs:enumeration value="MTR"/> <xs:enumeration value="MMT"/> <xs:enumeration value="CMT"/> </xs:restriction> </xs:simpleType></pre>										

simpleType **Measuredeclaration_CL**

type	restriction of xs:string												
used by	element cMeasuredeclaration												
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>enumeration</td><td>WD</td></tr> <tr> <td>enumeration</td><td>DW</td></tr> <tr> <td>enumeration</td><td>VW</td></tr> <tr> <td>enumeration</td><td>DI</td></tr> <tr> <td>enumeration</td><td>FN</td></tr> </table>	Kind	Value	enumeration	WD	enumeration	DW	enumeration	VW	enumeration	DI	enumeration	FN
Kind	Value												
enumeration	WD												
enumeration	DW												
enumeration	VW												
enumeration	DI												
enumeration	FN												

simpleType **PictureUse**

simpleType **PriceOnDemand_Type**Seite 118 von 129

</xs:simpleType>

simpleType **Rawmaterial_CL**

type	restriction of Erlaubte Zeichen																																
used by	element cMaterial																																
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ä Ä ö Ö ß)*</td></tr> <tr><td>enumeration</td><td>AL</td></tr> <tr><td>enumeration</td><td>PB</td></tr> <tr><td>enumeration</td><td>CR</td></tr> <tr><td>enumeration</td><td>AU</td></tr> <tr><td>enumeration</td><td>CD</td></tr> <tr><td>enumeration</td><td>CU</td></tr> <tr><td>enumeration</td><td>MG</td></tr> <tr><td>enumeration</td><td>MS</td></tr> <tr><td>enumeration</td><td>NI</td></tr> <tr><td>enumeration</td><td>PL</td></tr> <tr><td>enumeration</td><td>AG</td></tr> <tr><td>enumeration</td><td>W</td></tr> <tr><td>enumeration</td><td>ZN</td></tr> <tr><td>enumeration</td><td>SN</td></tr> </table>	Kind	Value	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä Ä ö Ö ß)*	enumeration	AL	enumeration	PB	enumeration	CR	enumeration	AU	enumeration	CD	enumeration	CU	enumeration	MG	enumeration	MS	enumeration	NI	enumeration	PL	enumeration	AG	enumeration	W	enumeration	ZN	enumeration	SN
Kind	Value																																
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä Ä ö Ö ß)*																																
enumeration	AL																																
enumeration	PB																																
enumeration	CR																																
enumeration	AU																																
enumeration	CD																																
enumeration	CU																																
enumeration	MG																																
enumeration	MS																																
enumeration	NI																																
enumeration	PL																																
enumeration	AG																																
enumeration	W																																
enumeration	ZN																																
enumeration	SN																																
source	<pre> <xs:simpleType name="Rawmaterial_CL"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="AL"/> <xs:enumeration value="PB"/> <xs:enumeration value="CR"/> <xs:enumeration value="AU"/> <xs:enumeration value="CD"/> <xs:enumeration value="CU"/> <xs:enumeration value="MG"/> <xs:enumeration value="MS"/> <xs:enumeration value="NI"/> <xs:enumeration value="PL"/> <xs:enumeration value="AG"/> <xs:enumeration value="W"/> <xs:enumeration value="ZN"/> <xs:enumeration value="SN"/> </xs:restriction> </xs:simpleType> </pre>																																

simpleType **String_0_40_Type**

type	restriction of Erlaubte Zeichen								
used by	elements sDimensiontext LongtextType/Longtexts/sText								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü ä Ä ö Ö ß)*</td></tr> </table>	Kind	Value	minLength	0	maxLength	40	pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä Ä ö Ö ß)*
Kind	Value								
minLength	0								
maxLength	40								
pattern	([! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü ä Ä ö Ö ß)*								
source	<pre> <xs:simpleType name="String_0_40_Type"> </pre>								

	<pre> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="0"/> <xs:maxLength value="40"/> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType **String_10000_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	elements sDescriptionLong sDescriptionMarketing								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10000</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x000A;-&#x00D;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10000	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	10000								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*								
source	<pre> <xs:simpleType name="String_10000_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="10000"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_10_Type**

type	restriction of Erlaubte Zeichen								
used by	elements sPosition sProductgroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	10	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	10								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_10_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_14_Type**

type	restriction of Erlaubte Zeichen								
used by	element sEan								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>14</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	14	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	14								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Ü ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_14_Type"> </pre>								

	<pre> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="14"/> </xs:restriction> </xs:simpleType> </pre>
--	---

simpleType **String_15_Type**

type	restriction of Erlaubte Zeichen								
used by	elements sAccessory sAlternate sAssignedArticle sHistoricProduct sModelNumber sSparepart sSuccessor 1 sSuccessor 2 sSuccessor 3								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>15</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	15	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	15								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_15_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="15"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_20_Type**

type	restriction of Erlaubte Zeichen								
used by	elements HeaderType/sLUCIDNumber sSupplierShortName								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>20</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	20	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	20								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\' [a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_20_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="20"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_256_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	element sDescriptionShort								
facets	<table> <tr> <td>Kind</td><td>Value</td></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>256</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;] &#x00A0;-&#x00FF;] &#x0100;-&#x017F;] &#x0370;-&#x03FF;] &#x0400;-&#x04FF;] &#x20A0;-&#x20CF;] &#x2000;-&#x206F;] &#x2300;-&#x000A; &#x000D; &#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	256	pattern	([-~] -ÿ] Ā-ſ] Ͱ-Ͽ] Ѐ-ӿ] ₠-⃏]  -⁯] ⌀-
  ∀-⋿])*
Kind	Value								
minLength	1								
maxLength	256								
pattern	([-~] -ÿ] Ā-ſ] Ͱ-Ͽ] Ѐ-ӿ] ₠-⃏]  -⁯] ⌀-
  ∀-⋿])*								

simpleType **String_256_Type**

simpleType **String_2_Type**

simpleType **String_35_Type**

10.01.2021

source	<pre><xs:simpleType name="String_35_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="35"/> </xs:restriction> </xs:simpleType></pre>
--------	---

simpleType **String_3_Type**

type	restriction of Erlaubte Zeichen								
used by	element sWaregroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>3</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	3	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	3								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre><xs:simpleType name="String_3_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="3"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **String_40_Type**

type	restriction of Erlaubte Zeichen								
used by	elements sDescription sDocDescription sShorttext1 sShorttext2 sText								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>40</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	40	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	40								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre><xs:simpleType name="String_40_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="40"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **String_4_Type**

type	restriction of Erlaubte Zeichen								
used by	element sDiscountgroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>4</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. /[0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	4	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	4								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. /[0-9] < = > \\? @ [A-Z] \\^ _ '[a-z] ü Û ä Ä ö Ö § ß)*								

source	<pre><xs:simpleType name="String_4_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="4"/> </xs:restriction> </xs:simpleType></pre>
--------	---

simpleType **String_512_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	element sUsageNode								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>512</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x000A;-&#x000D;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	512	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	512								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*								
source	<pre><xs:simpleType name="String_512_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="512"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **String_5_Type**

type	restriction of Erlaubte Zeichen								
used by	element sPricegroup								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>5</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; &#x25; &#x26; &#x27; &#x28; &#x29; &#x2A; &#x2B; &#x2C; &#x2D; &#x2E; &#x2F; &#x30; &#x31; &#x32; &#x33; &#x34; &#x35; &#x36; &#x37; &#x38; &#x39; &#x40; &#x41; &#x42; &#x43; &#x44; &#x45; &#x46; &#x47; &#x48; &#x49; &#x4A; &#x4B; &#x4C; &#x4D; &#x4E; &#x4F; &#x50; &#x51; &#x52; &#x53; &#x54; &#x55; &#x56; &#x57; &#x58; &#x59; &#x5A; &#x5B; &#x5C; &#x5D; &#x5E; &#x5F; &#x60; &#x61; &#x62; &#x63; &#x64; &#x65; &#x66; &#x67; &#x68; &#x69; &#x6A; &#x6B; &#x6C; &#x6D; &#x6E; &#x6F; &#x70; &#x71; &#x72; &#x73; &#x74; &#x75; &#x76; &#x77; &#x78; &#x79; &#x7A; &#x7B; &#x7C; &#x7D; &#x7E; &#x7F; &#x80; &#x81; &#x82; &#x83; &#x84; &#x85; &#x86; &#x87; &#x88; &#x89; &#x8A; &#x8B; &#x8C; &#x8D; &#x8E; &#x8F; &#x90; &#x91; &#x92; &#x93; &#x94; &#x95; &#x96; &#x97; &#x98; &#x99; &#x9A; &#x9B; &#x9C; &#x9D; &#x9E; &#x9F; &#xA0; &#xA1; &#xA2; &#xA3; &#xA4; &#xA5; &#xA6; &#xA7; &#xA8; &#xA9; &#xAA; &#xAB; &#xAC; &#xAD; &#xAE; &#xAF; &#xB0; &#xB1; &#xB2; &#xB3; &#xB4; &#xB5; &#xB6; &#xB7; &#xB8; &#xB9; &#xBA; &#xBB; &#xBC; &#xBD; &#xBE; &#xBF; &#xC0; &#xC1; &#xC2; &#xC3; &#xC4; &#xC5; &#xC6; &#xC7; &#xC8; &#xC9; &#xCA; &#xCB; &#xCC; &#xCD; &#xCE; &#xCF; &#xD0; &#xD1; &#xD2; &#xD3; &#xD4; &#xD5; &#xD6; &#xD7; &#xD8; &#xD9; &#xDA; &#xDB; &#xDC; &#xDD; &#xDE; &#xDF; &#xE0; &#xE1; &#xE2; &#xE3; &#xE4; &#xE5; &#xE6; &#xE7; &#xE8; &#xE9; &#xEA; &#xEB; &#xEC; &#xED; &#xEE; &#xEF; &#xF0; &#xF1; &#xF2; &#xF3; &#xF4; &#xF5; &#xF6; &#xF7; &#xF8; &#xF9; &#xFA; &#xFB; &#xFC; &#xFD; &#xFE; &#xFF;)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	5	pattern	(! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*
Kind	Value								
minLength	1								
maxLength	5								
pattern	(! " # $ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 @ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~ €  ‚ ƒ „ … † ‡ ˆ ‰ Š ‹ Œ  Ž   ‘ ’ “ ” • – — ˜ ™ š › œ  ž Ÿ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ­ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û ü ý þ ÿ)*								
source	<pre><xs:simpleType name="String_5_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="5"/> </xs:restriction> </xs:simpleType></pre>								

simpleType **String_60_Extended_Type**

type	restriction of Erlaubte Zeichen Extended								
used by	elements cAttributeunit sAttributeclass sAttributedescription sAttributename sAttributevalue sAttributevalue2								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>60</td></tr> <tr> <td>pattern</td><td>([&#x0020;-&#x007E;][&#x00A0;-&#x00FF;][&#x0100;-&#x017F;][&#x0370;-&#x03FF;][&#x0400;-&#x04FF;][&#x20A0;-&#x20CF;][&#x2000;-&#x206F;][&#x2300;-&#x23FF;][&#x000A;-&#x000D;][&#x2200;-&#x22FF;])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	60	pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*
Kind	Value								
minLength	1								
maxLength	60								
pattern	([-~][-ÿ][Ā-ſ][Ͱ-Ͽ][Ѐ-ӿ][₠-⃏][ -⁯][⌀-⏿][
-][∀-⋿])*								

	⋿])*
source	<pre> <xs:simpleType name="String_60_Extended_Type"> <xs:restriction base="Erlaubte_Zeichen_Extended"> <xs:minLength value="1"/> <xs:maxLength value="60"/> </xs:restriction> </xs:simpleType> </pre>

simpleType **String_80_Type**

type	restriction of Erlaubte Zeichen								
used by	elements HeaderType/sPackagingDisposalProvider sSerie								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>80</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	80	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	80								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_80_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="80"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **String_8_Type**

type	restriction of Erlaubte Zeichen								
used by	element sLongtext								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>8</td></tr> <tr> <td>pattern</td><td>(&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\) * \\+ , &#x2D; \\. / [0-9] &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö § ß)*</td></tr> </table>	Kind	Value	minLength	1	maxLength	8	pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö § ß)*
Kind	Value								
minLength	1								
maxLength	8								
pattern	(! " # $ % & ' \\(\\) * \\+ , - \\. / [0-9] < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö § ß)*								
source	<pre> <xs:simpleType name="String_8_Type"> <xs:restriction base="Erlaubte_Zeichen"> <xs:minLength value="1"/> <xs:maxLength value="8"/> </xs:restriction> </xs:simpleType> </pre>								

simpleType **Supplier_ID**

type	restriction of xs:string								
used by	element sSupplierID								
facets	<table> <tr> <th>Kind</th><th>Value</th></tr> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>maxLength</td><td>13</td></tr> <tr> <td>pattern</td><td>([0-9])*</td></tr> </table>	Kind	Value	minLength	1	maxLength	13	pattern	([0-9])*
Kind	Value								
minLength	1								
maxLength	13								
pattern	([0-9])*								

	enumeration KTM
	enumeration MTQ
	enumeration CMQ
	enumeration LTR
	enumeration MTR
	enumeration MMT
	enumeration PR
	enumeration MTK
	enumeration CMK
	enumeration SET
	enumeration PCE
	enumeration TNE
	enumeration CMT
source	<pre> <xs:simpleType name="Unit_CL"> <xs:restriction base="xs:string"> <xs:enumeration value="DZN"/> <xs:enumeration value="GRM"/> <xs:enumeration value="HLT"/> <xs:enumeration value="KGM"/> <xs:enumeration value="KTM"/> <xs:enumeration value="MTQ"/> <xs:enumeration value="CMQ"/> <xs:enumeration value="LTR"/> <xs:enumeration value="MTR"/> <xs:enumeration value="MMT"/> <xs:enumeration value="PR"/> <xs:enumeration value="MTK"/> <xs:enumeration value="CMK"/> <xs:enumeration value="SET"/> <xs:enumeration value="PCE"/> <xs:enumeration value="TNE"/> <xs:enumeration value="CMT"/> </xs:restriction> </xs:simpleType> </pre>

simpleType **Verpackungsart**

type	restriction of Erlaubte Zeichen																														
used by	element cPackageKind																														
facets	<table border="1"> <thead> <tr> <th>Kind</th><th>Value</th></tr> </thead> <tbody> <tr> <td>pattern</td><td>([&#x20; &#x21; &#x22; &#x23; &#x24; % &#x26; &#x27; \\(\\ * \\+ , &#x2D; \\. / [0-9] : &#x3C; = > \\? &#x40; [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß ß)*</td></tr> <tr> <td>enumeration</td><td>BB</td></tr> <tr> <td>enumeration</td><td>BG</td></tr> <tr> <td>enumeration</td><td>BH</td></tr> <tr> <td>enumeration</td><td>BK</td></tr> <tr> <td>enumeration</td><td>CF</td></tr> <tr> <td>enumeration</td><td>CG</td></tr> <tr> <td>enumeration</td><td>CH</td></tr> <tr> <td>enumeration</td><td>CI</td></tr> <tr> <td>enumeration</td><td>CT</td></tr> <tr> <td>enumeration</td><td>PA</td></tr> <tr> <td>enumeration</td><td>PC</td></tr> <tr> <td>enumeration</td><td>PG</td></tr> <tr> <td>enumeration</td><td>PK</td></tr> </tbody> </table>	Kind	Value	pattern	([! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] : < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß ß)*	enumeration	BB	enumeration	BG	enumeration	BH	enumeration	BK	enumeration	CF	enumeration	CG	enumeration	CH	enumeration	CI	enumeration	CT	enumeration	PA	enumeration	PC	enumeration	PG	enumeration	PK
Kind	Value																														
pattern	([! " # $ % & ' \\(\\ * \\+ , - \\. / [0-9] : < = > \\? @ [A-Z] \\^ _ \\[a-z] ü Û ä Ä ö Ö ß ß)*																														
enumeration	BB																														
enumeration	BG																														
enumeration	BH																														
enumeration	BK																														
enumeration	CF																														
enumeration	CG																														
enumeration	CH																														
enumeration	CI																														
enumeration	CT																														
enumeration	PA																														
enumeration	PC																														
enumeration	PG																														
enumeration	PK																														

	enumeration PN enumeration PU enumeration RG enumeration SC enumeration HP enumeration TU enumeration BTL enumeration BX enumeration CO enumeration DY enumeration STG enumeration TRO enumeration PLA enumeration GEB enumeration PMS
source	<pre> <xs:simpleType name="Verpackungsart"> <xs:restriction base="Erlaubte_Zeichen"> <xs:enumeration value="BB"/> <xs:enumeration value="BG"/> <xs:enumeration value="BH"/> <xs:enumeration value="BK"/> <xs:enumeration value="CF"/> <xs:enumeration value="CG"/> <xs:enumeration value="CH"/> <xs:enumeration value="CI"/> <xs:enumeration value="CT"/> <xs:enumeration value="PA"/> <xs:enumeration value="PC"/> <xs:enumeration value="PG"/> <xs:enumeration value="PK"/> <xs:enumeration value="PN"/> <xs:enumeration value="PU"/> <xs:enumeration value="RG"/> <xs:enumeration value="SC"/> <xs:enumeration value="HP"/> <xs:enumeration value="TU"/> <xs:enumeration value="BTL"/> <xs:enumeration value="BX"/> <xs:enumeration value="CO"/> <xs:enumeration value="DY"/> <xs:enumeration value="STG"/> <xs:enumeration value="TRO"/> <xs:enumeration value="GEB"/> <xs:enumeration value="PMS"/> </xs:restriction> </xs:simpleType> </pre>

simpleType **WeightUnit_CL**

type	restriction of xs:string								
used by	element cUnitweight								
facets	<table><tr><td>Kind</td><td>Value</td></tr><tr><td>enumeration</td><td>GRM</td></tr><tr><td>enumeration</td><td>KGM</td></tr><tr><td>enumeration</td><td>TNE</td></tr></table>	Kind	Value	enumeration	GRM	enumeration	KGM	enumeration	TNE
Kind	Value								
enumeration	GRM								
enumeration	KGM								
enumeration	TNE								
source	<pre><xs:simpleType name="WeightUnit_CL"> <xs:restriction base="xs:string"> <xs:enumeration value="GRM"/> <xs:enumeration value="KGM"/> <xs:enumeration value="TNE"/> </xs:restriction> </xs:simpleType></pre>								